



Features

- RoHS lead-solder-exemption compliant
- Universal input 85-264 VAC
- CE marked to Low Voltage Directive
- Input transient & ESD compliance to EN61000-4-2/-3/-4
- Meets EN55022 conducted and radiated limits
- Greater than 311,000 Hours MTBF
- Remote sense (MAP30, MAP42)

Description

Power-One's MAP30/40/42 Series of power supplies combines low cost and universal input in a board-only power solution to meet commercial and industrial requirements. Full international safety, EMI, and ESD compliance ensure worldwide acceptance. All units bear the CE Mark.

Fixed frequency operation simplifies system level operation. The MAP30/40/42 Series is configured to the international standard 3.00" x 5.00" footprint. Input and output connections are made via popular single-row Molex connectors.

Single output models feature wide-range output adjustability to meet a wide variety of standard and user-specific output voltage requirements.

Single-Output Model Selection

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT (NOTE 2)	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE %p-p (NOTE 1)	INITIAL SETTING ACCURACY
MAP30-1005	5V	4.7V to 5.8V	6A	8A	0.2%	±1%	1%	4.9V to 5.1V
MAP42-1005	5V	4.7V to 5.8V	8A	11A	0.2%	±1%	1%	4.9V to 5.1V
MAP42-1012	12V/15V	11.0V to 18.0V	3.4/2.7A (Note 3)	4.6/3.7A (Note 3)	0.2%	1%	1%	11.9V to 12.1V
MAP42-1024	24V/28V	23.0V to 29.0V	1.7/1.4A (Note 3)	2.3/1.9A (Note 3)	0.2%	1%	1%	23.8V to 24.2V

- NOTES:** 1) Maximum peak to peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
 2) Peak ratings may be used as maximum output current with 100 Linear Feet per Minute (LFM) forced air cooling.
 3) MAP42-1012 output currents are expressed as 12V/15V operation. MAP42-1024 output currents are expressed as 24V/28V operation.

Multiple-Output Model Selection – 40W CONTINUOUS OUTPUT POWER

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT	PEAK OUTPUT CURRENT (NOTE 1)	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE %p-p (NOTE 2)	INITIAL SETTING ACCURACY
MAP40-3000	+5V	4.75V to 5.50V	3A	5A	0.2%	2%	1%	4.9V to 5.1V
	+12V	Fixed	2A	3.5A	1%	3.5% (Note 3)	1%	11.5V to 12.5V
	-12V	Fixed	0.3A	0.5A	1%	2% (Note 4)	1%	-11.4V to -12.6V
MAP40-3100	+5V	4.75V to 5.25V	3A	5A	0.2%	2%	1%	4.9V to 5.1V
	+12V	Fixed	2A	3.5A	1%	3.5% (Note 3)	1%	11.5V to 12.5V
	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.4V to -12.6V
MAP40-3101	+5V	4.75V to 5.25V	3A	5A	0.2%	2%	1%	4.9V to 5.1V
	+24V	Fixed	1A	1.5A	1%	3.5% (Note 3)	1%	23.0V to 25.0V
	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.5V to -12.5V
MAP40-3105	+5V	4.7V to 5.8V	3A	5A	0.2%	2%	1%	4.9V to 5.1V
	+12	Fixed	2A	3.5A	1%	3.5% (Note 3)	1%	11.5V to 12.5V
	-5V	Fixed	0.5A	1.0A	1%	2%	1%	-4.75V to -5.25V
MAP40-3500	+5V	4.7V to 5.8V	5A	6A	0.2%	2%	1%	4.9V to 5.1V
	+12V	Fixed	1A	3.5A	1%	3.5% (Note 3)	1%	11.5V to 12.5V
	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.4V to -12.6V
MAP40-3003	+5V	4.7V to 5.8V	3A	5A	0.2%	2%	1%	4.9V to 5.1V
	+15V	Fixed	1.5A	3A	1%	3.5% (Note 3)	1%	14.7V to 15.3V
	-15V	Fixed	0.2A	0.5A	1%	2% (Note 4)	1%	-14.3V to -15.7V

- NOTES :** 1) Peak loads for 30 seconds or less are acceptable, (10% duty cycle max.).
 2) Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
 3) Quasi regulated output. See Regulation Curves for more information.
 4) Requires a minimum load of 0.5A on V1 or 0.3A on V2.

Model numbers highlighted in yellow or shaded are not recommended for new designs.

Input Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - AC	Continuous input range.	MAP42	85	264	VAC
		MAP30, MAP40	90	264	
Input Frequency	AC input.	47		63	Hz
Brown Out Protection	Lowest AC input voltage that regulation is maintained with full rated loads.	85			VAC
Hold-up Time	Nominal AC Input Voltage (115VAC), full rated load.	15			ms
Input Current	90 VAC (40W load).			1.2	ARMS
Input Protection	Non-user serviceable internally located AC input line fuse.				
Inrush Surge Current	Internally limited by thermistor. Vin = 264VAC (one cycle). 25° C.			38	APK
Operating Frequency	Switching frequency of power supply (fixed frequency).	23	25	30	kHz

Output Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full load, 120VAC.		70		%
Minimum Loads	Single output models; MAP30, MAP42.	0.0			Amps
	All multiple output models, see regulation graphs.				
Ripple and Noise	Full load, 20 MHz bandwidth.				See Model Selection Chart.
Output Power	Multiple output models with convection cooling.			40	Watts
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on, V1.			1	%
Regulation	Varies by output, total regulation includes: Line changes from 90-132 VAC or 175-264, changes in load starting at 20% load and changing to 100% load.				See regulation graphs.
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output only of multiple output units).		500		µs
Turn-on Delay	Time required for initial output voltage stabilization.		1	2	Sec
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%.		20		ms

Interface Signals and Internal Protection

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Main output only of multiple output units.	MAP30-1005, MAP42-1005	5.8	6.8	V
		MAP42-1012	20.0	22.0	
		MAP42-1024	32.0	37.0	
			5.8	6.8	
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.		130		%
Remote Sense	Total cable drop, single output models only.			250	mV

Safety, Regulatory, and EMI Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	UL60950.				Approved.
	CSA 22.2 No. 60950.				
	EN60950 (TUV).				
Dielectric Withstand Voltage	Input to output.	2600			VDC
Electromagnetic Interference	FCC CFR title 47 part 15 sub-part B - conducted.		B		Class
	EN55022 / CISPR 22 conducted (Note 1).		B		
	EN55022 / CISPR 22 radiated (Note 2).		B		
Input Transient Protection	EN61000-4-5 Level 3	Line to Line	1		kV
		Line to Ground	2		
Insulation Resistance	Input to output.	7			MΩ
Leakage Current	Per EN60950, 264VAC	MAP42, MAP40-3100, 3001, 3105, 3500		500	µA
		MAP30-1005, MAP40-3000, MAP40-3003		750	

NOTES: 1) MAP30-1005, MAP40-3000, MAP40-3003 meet Class A.
2) MAP40-3000, MAP40-3003, MAP3500 meet Class A.


Environmental Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating.			10k	ASL Ft.
	Non-operating.			40k	ASL Ft.
Operating Temperature	Derate linearly above 50°C by 2.5% per °C to a maximum temperature of 70°C.	At 100% load:	0	50	°C
		At 50% load:	0	70	°C
Storage Temperature		-40		85	°C
Temperature Coefficient	0°C to 70°C (after 15 minute warm-up).		±0.02	±0.03	%/°C
Relative Humidity	Non-condensing.	5		95	%RH
Shock	Operating, peak acceleration.			20	G
Vibration	Random vibration, 10Hz to 2kHz, 3 axis.			6	GRMS


NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

OVERALL SIZE: 5.00" x 3.00" x (see table) (127.0mm x 76.2mm x see table)
WEIGHT: 0.6 lb (0.26 kg)

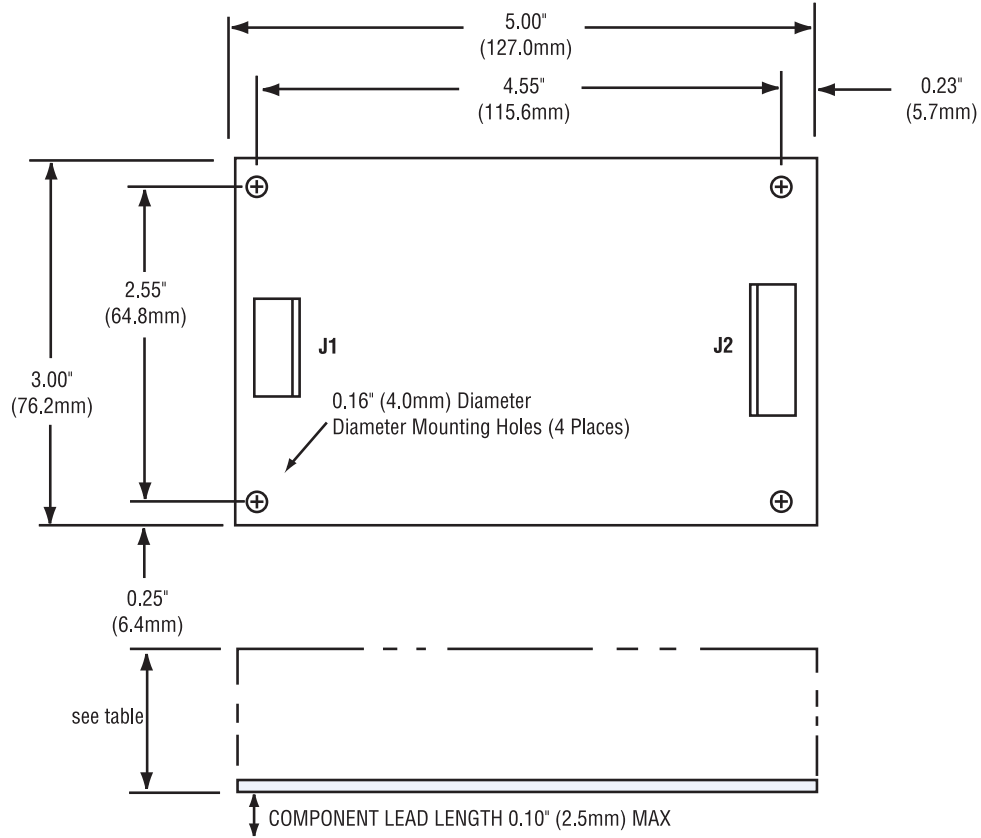

ELECTRICAL CONNECTORS

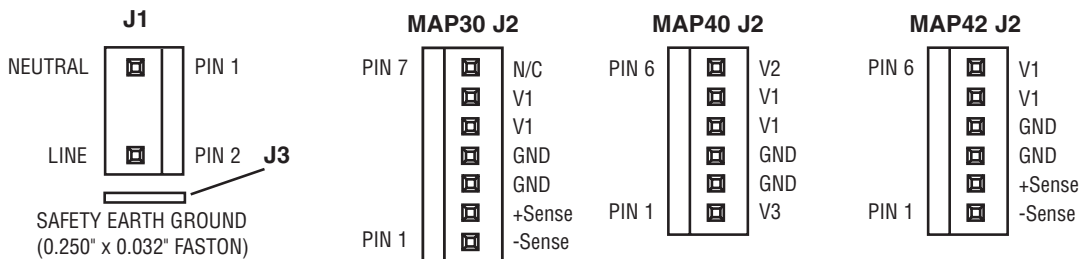

J1/J2 MATES WITH MOLEX (SERIES 2139 or SERIES 41695) .156" (4mm) CENTER CRIMP TERMINAL HOUSING OR EQUIVALENT

MAP30/40/42 SERIES HEIGHT

Single Output Models		Multiple Output Models	
Model	Height	Model	Height
MAP30-1005	1.16" (29.5)	MAP40-3000	1.16" (29.5)
MAP42-1005	1.25" (31.8)	MAP40-3003	1.16" (29.5)
MAP42-1012	1.25" (31.8)	MAP40-3100	1.25" (31.8)
MAP42-1024	1.25" (31.8)	MAP40-3101	1.25" (31.8)
		MAP40-3105	1.25" (31.8)
		MAP40-3500	1.60" (40.6)