

## SFL Series, 75–600 Watt

The SFL series is a DIN Rail switching power supply series that complements the SolaHD SDN™ products with more input voltage, output voltage and power levels to give an even broader range of industrial DC power solutions.

These products are available in 12, 24 and 48 Vdc output and 115/230 Vac Input. They feature pluggable screw connectors\* (mating connectors are included in each box sold) for easy installation and service. The products feature a DIN Rail connection, front panel DC OK indicators, and easily accessible AC and DC connections.

For parallel operation with power sharing, a redundant version is available for the 300 W (24 V/12 A) and 600 W (24 V/24 A) models.

### Features

- DIN Rail Mount regulated switch mode power supplies
- 12 V, 24 V, and 48 V outputs available from 1.5-24 A
- Easy-to-wire pluggable\* and screw terminal connectors
- Adjustable output voltage
- Selectable input: 115/230 Vac
- UL1604 Listed for Class 1, Division 2 hazardous locations (except -RED and -UDS versions)
- UL 508 Listed (except -RED and -UDS versions). No derating necessary.
- Two year warranty

\* Except 600 watt models.



UL 508 Listed  
IND. CONT.  
EQ.E61379



UL 60950  
E137632  
CUL/CSA-C22.2  
No. 234-M90



EMC and  
Low Volt.  
Directive

- Fully Integrated Redundant models available:
  - RED (For SFL24-24-100 and SFL12-24-100 only)  
Designed for N + 1 redundant power supply systems, these units provide active current sharing and allow up to 5 power supplies to be paralleled. Decoupling diodes and an alarm output to signal a unit failure are included in this option. Multiple units are required for redundancy.
- Models with optional battery back-up available:
  - UDS (For SFL24-24-100 and SFL12-24-100 only)  
Contact Technical Services for details.

### Selection Table

Catalog Number	Input Voltage Selectable	Output Power Maximum	Output Voltage Nominal	Output Current Maximum
SFL 6–12–100 SFL 1.5–48–100	115/230 Vac	75 Watt	12 Vdc 48 Vdc	6 A 1.5 A
SFL 3–48–100		150 Watt	48 Vdc	3 A
SFL 12–24–100 SFL 6–48–100		300 Watt	24 Vdc 48 Vdc	12 A 6 A
SFL 24–24–100 SFL 12–48–100		600 Watt	24 Vdc 48 Vdc	24 A 12 A
Redundant Models				
SFL 12–24–100RED SFL 24–24–100RED	115/230 Vac	300 Watt 600 Watt	24 Vdc	12 A 24 A

Visit our website at [www.solahd.com](http://www.solahd.com) or  
contact Technical Services at (800) 377-4384 with any questions.

SFL Specifications

Parameter	Value	
<b>Input</b>		
<b>Input voltages nominal (user selectable)</b>	93-132 Vac / 187-264 Vac	
<b>Input Frequency</b>	47-63 Hz	
<b>Input current at full load (typical)</b>	115 Vac	230 Vac
– 75 W (12 V/6 A, 24 V/3 A, 48 V/1.5 A)	1.7A	0.9 A
– 150 W (24 V/6 A, 48 V/3 A)	3.0A	1.7 A
– 300 W (24 V/12 A, 48 V/6 A)	5.4A	3.3 A
– 600 W (24 V/24 A, 48 V/12 A)	10.5A	6.4 A
<b>Inrush current (max.)</b>	115 Vac	230 Vac
– 75 W	16.5 A	33.0 A
– 150 W	35.0 A	70.0 A
– 300 W	35.0 A	70.0 A
– 600 W	70.0 A	80.0 A
<b>Internal fuse (slow blow) not accessible</b>		
– 75 W / 150 W	4.0 A	
– 300 W	6.3 A	
– 600 W	12.0 A	
<b>Output</b>		
<b>Voltage Adjustment Range</b>		
– 12 V models	12 – 14 Vdc	
– 24 V models	24 – 28 Vdc	
– 48 V models	48 – 52 Vdc	
<b>Output Regulation</b>		
– Line voltage variation	±0.2% max.	
– Load variation 10–90%		
75W, 150W models	±1.0% max.	
300W, 600W models	±0.5% max.	
<b>Ripple and noise (20 MHz bandwidth)</b>	< 50 mVpp	
<b>Electronic short circuit protection / current limitation</b>	110 % typ. (constant current)	
<b>Parallel Operation</b>		
– SFL12–24–100RED	Up to 5 units	
– SFL24–24–100RED		
<b>Overvoltage Protection, trigger point at</b>	140% typical out nominal	
<b>Holdup Time</b>	min. 20 mS	

Parameter	Value	
<b>General</b>		
<b>Operating Temperature Range Derating above 50°C</b>	-25°C...+70°C 2%/°C	
<b>Storage Temperature</b>	-25°C...+85°C	
<b>Humidity (non condensing)</b>	95% rel H max.	
<b>Switching Frequency</b>		
– 75 W	100 kHz typical	
– 150 W/300 W/600 W	67 kHz typical	
<b>Efficiency</b>	>85%	
<b>Operation Indication</b>	LED, DC OK	
<b>Isolation Voltage</b>		
– Input/output	3,000 Vac (1 minute)	
– Input/case	2,000 Vac (1 minute)	
– Output/case	500 Vac (1 minute)	
<b>Safety Class (IEC536)</b>	Class 1	
<b>Safety Standards Met</b>	IEC950, EN60950, CE marked for LVD, UL60950 recognized and UL 508.	
<b>Conducted EMI according to:</b>	EN55022 Class B, EN55011 Class B, FCC-B	
<b>Electromagnetic Susceptibility</b>		
– Electrostatic discharge ESD.	EN61000-4-2	4 kV/8 kV
– RF field susceptibility.	EN61000-4-3	10 V/m
– Electrical fast transients/ bursts on main line.	EN61000-4-4	2 kV
– Immunity to conducted radio frequency disturbances above 9 kHz.	EN61000-4-6	10 V
– Mains frequency field	EN61000-4-8	30 A/m
<b>Case protection according to IEC529</b>	IP 20	
<b>Case material</b>	Steel	
<b>Mounting</b>	Snap-on 35 mm DIN Rail as per EN50022 or Chassis mounting option available	


Mounting Brackets

For easy conversion to panel or chassis mounting.

Catalog Number	Output Power Maximum
SFL 75–PMBRK	75 Watt
SFL 150–PMBRK	150 Watt
SFL 300–PMBRK	300 Watt
SFL 600–PMBRK	600 Watt


SFL Series Dimensions (inches/mm)

SFL 75 Watt (12 V/6 A, 48 V/1.5 A)

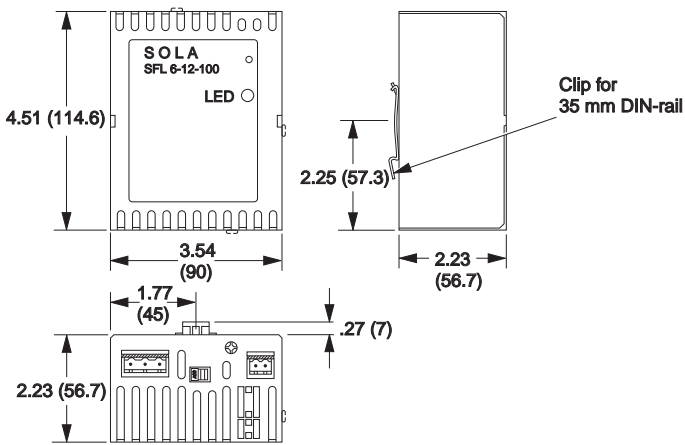


Weight: 1.06 lbs/.48 kg approx.

SFL 150 Watt (SFL 3-48-100)

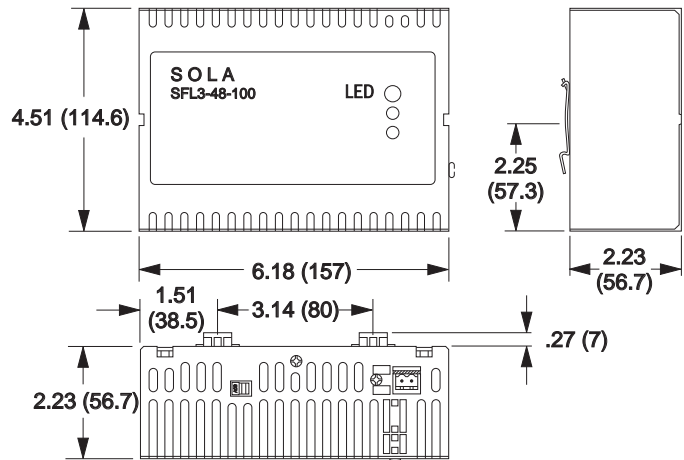


Weight: 1.6 lbs/.73 kg approx.

SFL 300 Watt (SFL 12-24-100[RED], SFL 6-48-100)

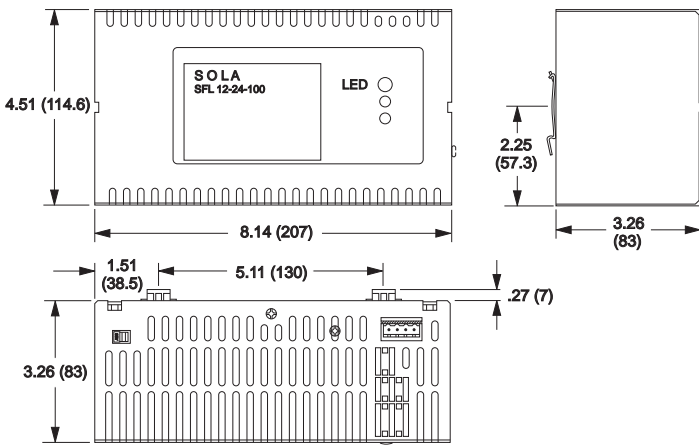

Weight: 3.09 lbs/1.4 kg approx.

SFL 600 Watt (SFL 12-48-100, SFL 24-24-100[RED])

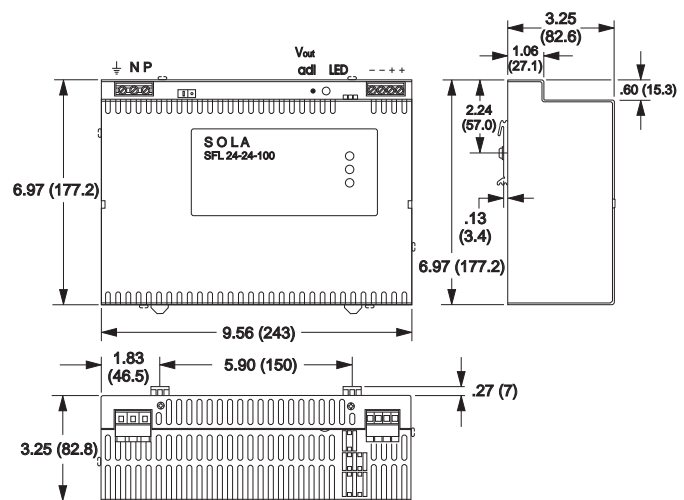

Weight: 4 lbs/1.81 kg approx.