



**EATON**

## Commercial Controls Sealed Vehicle Rocker (SVR)

Product Focus





## TABLE OF CONTENTS

	Page
<b>Description</b>	2
<b>Specifications</b>	2 – 3
<b>Additional Options</b>	3
<b>How to Order</b>	4 – 5
<b>Circuit Descriptions</b>	6 – 7
<b>Dimensions</b>	8 – 10
<b>Icons</b>	11

into the body of the switch; mounting hardware or special tools are not necessary.

The SVR is offered in single- and double-pole switch circuits, with 2- and 3-position momentary and maintained circuits available. Switch and illumination circuits are terminated with 2.8 mm (0.11 inch) tin-plated copper alloy spade terminals. The SVR connector can be loaded with the appropriate terminals and/or wire seals to accomplish sealing at the back end of the switch.

## Specifications

- Electrical Life**
- **Standard Plating:** 50,000 operations at 12 amperes at either 12 or 24 Vdc. Life cycle testing conducted using both inductive and resistive loads.
  - **Gold Plating:** 250,000 operations at 10 mA at either 12 or 24 Vdc.
- Mechanical Life**  
250,000 operations minimum.
- Dielectric Strength**  
1500 volts rms minimum.
- Operate Force**  
4.4 – 13.2 N (1 – 3 lbs.) depending on circuit configuration and actuator style.

**Operating Temperature Range**  
-40°C to +85°C

**Storage Temperature Range**  
-40°C to +85°C

**Circuits**  
1- or 2-pole, 2- or 3-position, with momentary and maintained capabilities.

- Standard Circuit Options**
- ON – NONE – ON
  - ON – OFF – ON
  - ON\* – OFF – ON\*
  - ON\* – OFF – ON
  - ON – ON – ON
  - ON\* – NONE – ON
  - ON\* – ON – ON\*
  - ON\* – ON – ON

(\* = Momentary. See circuit schematics on Page 6)



Below panel rocker switch with daylight white icon and red LED

Catalog Numbers **927766-3** (14 – 16 gauge) and **927770-3** (18 – 20 gauge). (See also Sealing section below for additional AMP components to seal the connector interface.)

**Plastic Component UL® File Numbers**

- **Base material:** UL94 V-O
- **Frame material:** UL94 H-B
- **Sub-actuator material:** UL94 V-O
- **Actuator material:**
  - UL94 V-2 (below panel rocker button and paddle actuator)
  - UL94 V-0 (above panel rocker button)



Above panel rocker switch with two white snap-in lenses and amber LED

**Mounting Means**

Snap-in mounting using four flexible plastic retainers integral with switch frame.

**Mounting Hole**

Standard panel cutout of 36.8 x 21.1 mm (1.45 x 0.83 inches). (See panel opening drawing on Page 8.)

**Panel Thickness**

1.0 to 4.0 mm (0.04 to 0.16 inches). Best results obtained between 1.5 to 3.0 mm (0.06 to 0.12 inches).

**Sealing**

SVR design includes a sealed contact chamber with dust and water resistance to IP68. The

**Contact Material**

- **Movable:** Copper alloy with silver alloy contact surface.
- **Stationary:** Silver-plated copper alloy with silver alloy contact surface.
- **Gold-plated:** Contacts are available for low level electrical loads.

**Terminal Type**

- Standard 2.8 mm (0.11 inch) tin-plated copper alloy spade terminal.
- Mates to AMP Junior Power Timer Terminals —

## Description

The Sealed Vehicle Rocker (SVR) switch from Eaton's Electrical business now offers an above panel actuator style in addition to the below panel and paddle actuators. Designed to meet the severe environmental requirements of the construction and agricultural vehicle markets, the SVR is sealed at the front and back of the switch, and meets the rigorous sealing requirements of IP68. The small switch footprint minimizes the space taken on switch panels. SVR switches are assembled into panels by pressing the switch through the top of the panel, and are held in place by retention tabs molded



Below (left) and above (right) panel rocker switch styles





Below panel rocker switch with daylight white icons (left) and above panel rocker switch with two snap-in lenses (right)

harness connection can also be sealed by using AMP wire seals Catalog Numbers **828905-1** (14 – 16 gauge) or **828904-1** (18 – 20 gauge) to seal the wires to the connector. For an application where a connector cavity is not being used, it can be sealed with AMP sealing plug Catalog Number **828922-1**.

The above panel version may also be sealed to the panel using panel seal Catalog Number **32-2245**. (See drawing on Page 8.)

#### Actuator

The SVR switch family includes three styles of actuators: above panel, below panel and paddle. Switch performance and specifications are the same for all actuator styles. All actuators are replaceable and can be snapped on and off the switch. Black is standard, but other colors are also available. Matte finish is standard on all actuator styles, matching the finish on the bezels and all other visible SVR switch features and accessories. All actuators can be ordered either pre-assembled to the switch or as separate part numbers.

#### Actuator Styles

- Above panel rocker button offers new styling and a larger surface area. Eaton can offer assistance with unique designs of above panel actuators for applications where differentiation is desired.

- Below panel rocker button is the same two-faced European styling that has been offered for SVR since its initial release. Indicator style matches the below panel rocker button style.
- Paddle actuator allows toggle-type actuation of the SVR switch.

#### Backlighting

- Each switch can accommodate up to two LEDs which can be connected to be either circuit dependent or independent. (See illumination circuit schematics on Page 7.)
- Standard LED color is amber, with red, green and blue also available. Long life (100,000 hours) LEDs are standard.



Below panel rocker switch with daylight white icon

- Standard LED voltages are 12 and 24 Vdc.
- The below panel rocker button style includes a single-piece back-lit actuator with laser-etched icons in either daylight white or deadfront styles. Without illumination, the icon is either daylight white or deadfront, but will change to the color of the chosen light source when illuminated. (See picture examples on Page 7.)

#### Snap-in Lenses

- Above and below panel rocker buttons are available with or without one or two translucent lenses. Five standard lens colors are available: white, red, green, blue and amber.

#### Icons

- Icon areas are provided on each end of the rocker button. Icons may be illuminated or non-illuminated, and are pad-printed in a contrasting color either directly on the rocker button or the lens. (See examples of icons on Page 11.)

## Additional Options

- Additional colors of actuators, mounting bezels and lenses.
- Special circuits.
- Special ratings.
- Pad printing on the below panel switch bezel.
- Low current capabilities.
- Custom back-lit icons.
- Gang-mount system including end bezel Catalog Number **17-22146** and center bezel **17-22152**. (See drawing on Page 10.)
- Palm Guard (below panel switch only) at either or both ends of the switch frame. (See drawing on Page 9.)
- Indicators with insertable lenses. (See drawing on Page 9.)
- Polarized lock-on connector Catalog Number **25-13936**. (See drawing on Page 10.)

- Panel plug with connector retention feature Catalog Number **17-22145**. (See drawing on Page 10.)
- Non-illuminated below panel paddle actuator. (See drawing on Page 9 and picture below.)

**Note:** Contact your Eaton sales representative for additional information on options.

#### Catalog Part Number

The SVR part numbering system allows all product features to be captured in either a 15-digit part number (switch and actuator), a 6-digit part number (basic switch alone) or a 9-digit part number (actuator alone). (See How to Order tables on Pages 4 and 5.)



Paddle actuator switch (below panel only)





# How to Order

To determine the complete SVR part number for an above panel rocker switch with and/or without actuator.

## ABOVE PANEL ROCKER SWITCH

**S** **AC** **M** **2X** **D** **G** **AQ** **X** **XX** **X** **X**

Switch Series
1 Digit
S = SVR

Frame
1 Digit
M = Standard

Actuator Style
1 Digit
X = None
C = No Lens
D = Top/Left Lens Only
E = Bottom/Right Lens Only
F = Top/Left and Bottom/Right Lenses

Lens Color (Top/Left)
1 Digit
X = None
R = Red
G = Green
B = Blue
A = Amber
W = White

Icon (Bottom/Right)
2 Digits
XX = None
See Icon Table on Page 11

Switch Circuits/Illumination Circuits	
1st Digit (Circuit)	2nd Digit (Illumination)
A = ON - NONE - ON	<b>1-Pole</b> <b>Illumination</b>
C = ON - NONE - ON (Gold Plated)	A None
D = ON - OFF - ON	C Top/Left (D)
E = ON - OFF - ON (Gold Plated)	D Bottom/Right (D)
F = ON* - OFF - ON*	E Top/Left (I)
G = ON* - OFF - ON* (Gold Plated)	F Bottom/Right (I)
H = ON* - OFF - ON	G Top/Left (D)/ Bottom/Right (I)
J = ON* - OFF - ON (Gold Plated)	H Top/Left (I)/ Bottom/Right (D)
K = ON - ON - ON	J Top/Left (D)/ Bottom/Right (D)
L = ON - ON - ON (Gold Plated)	K Top/Left (I)/ Bottom/Right (I)
M = ON* - NONE - ON	<b>2-Pole</b> <b>Illumination</b>
P = ON* - NONE - ON (Gold Plated)	R None
R = ON* - ON - ON*	S Top/Left (D)
S = ON* - ON - ON* (Gold Plated)	T Bottom/Right (D)
T = ON* - ON - ON*	U Top/Left (I)
U = ON* - ON - ON (Gold Plated)	V Bottom/Right (I)
	W Top/Left (D)/ Bottom/Right (I)
	Y Top/Left (I)/ Bottom/Right (D)
	3 Top/Left (D)/ Bottom/Right (D)
	4 Top/Left (I)/ Bottom/Right (I)

Ⓛ Double-pole only. (See Switch Circuit Schematics on Page 6 and Illumination Circuit Schematics on Page 7.)

\* = Momentary. (I) = Independent. (D) = Dependent.

LED (Top/Left)	LED (Bottom/Right)
1 Digit	1 Digit
X = None	X = None
<b>14 V Standard</b>	
J = Red	
K = Green	
L = Amber (Standard)	
M = Blue	
<b>14 V Over/Reverse Voltage Protection</b>	
1 = Red	
2 = Green	
3 = Amber (Standard)	
7 = Blue	
<b>28 V Standard</b>	
E = Red	
F = Green	
G = Amber (Standard)	
H = Blue	
<b>28 V Over/Reverse Voltage Protection</b>	
4 = Red	
5 = Green	
6 = Amber (Standard)	
8 = Blue	

### LED Wavelengths:

Red = ~ 630 nm    Amber = ~ 592 nm  
Green = ~ 526 nm    Blue = ~ 472 nm

Icon (Top/Left)
2 Digits
XX = None
See Icon Table on Page 11

Lens Color (Bottom/Right)
1 Digit
X = None
R = Red
G = Green
B = Blue
A = Amber
W = White

Special Feature
1 Digit
X = None
For Eaton use only

Special Feature
1 Digit
X = None
For Eaton use only



Above panel rocker switch with two white snap-in lenses and amber LED

### Examples

SG4MKK — Above Panel Basic Switch Only — 2-pole ON\* - OFF - ON\* gold-plated circuit with dual green 14 volt independent LEDs.

DGAQXXXX — Above Panel Actuator Only — Actuator with green snap-in lens on top and AQ icon pad-printed in white.

SACM2XDGAQXXXX — Above Panel Switch with Actuator Assembled — 1-pole ON - NONE - ON with single 14 volt green dependent LED with over/reverse voltage protection on top, Actuator with green snap-in lens on top and AQ icon pad-printed in white.

### Notes

Standard color for pad printing RED, GREEN and BLUE lens will be WHITE.

Standard color for pad printing AMBER and WHITE lens will be BLACK.

Icons to be centered on lens.

Icon orientation per Icon Selection Table; alternate orientation will require a new 2-digit icon assignment. (See Icon Selection Table on Page 11.)

# How to Order

To determine the complete SVR part number for a below panel rocker switch with and/or without actuator.

## BELOW PANEL ROCKER SWITCH

**S** **AC** **S** **2X** | **2** **G** **AQ** **X** **XX** **X** **X**

Switch Series
1 Digit
S = SVR

Frame
1 Digit
S = Standard – Below Panel
T = Palm Guard – Top/Left
B = Palm Guard – Bottom/Right
F = Palm Guard – Full

Actuator Style
1 Digit
X = None
1 = No Lens
2 = Top/Left Lens Only
3 = Bottom/Right Lens Only
4 = Top/Left and Bottom/Right Lenses
5 = Paddle – No Lens
6 = Indicator – Top/Left Lens
7 = Indicator – Bottom/Right Lens
8 = Indicator – Top/Left and Bottom/Right Lens
9 = Indicator – No Lens
A = Decorative Rocker

Lens/Icon Color (Top/Left)
1 Digit
X = None
Lens Color
R = Red
G = Green
B = Blue
A = Amber
W = White
Decorative Icon Color
1 = Daylight White
2 = Deadfront

Icon (Bottom/Right)
2 Digits
XX = None <i>See Icon Table on Page 11</i>

Switch Circuits/Illumination Circuits		
1st Digit (Circuit)	2nd Digit (Illumination)	
A = ON – NONE – ON	1-Pole	Illumination
C = ON – NONE – ON (Gold Plated)		
D = ON – OFF – ON	A	None
E = ON – OFF – ON (Gold Plated)	D	Top/Left (D)
F = ON* – OFF – ON*	E	Bottom/Right (D)
G = ON* – OFF – ON* (Gold Plated)	F	Top/Left (I)
H = ON* – OFF – ON	G	Bottom/Right (I)
J = ON* – OFF – ON (Gold Plated)	H	Top/Left (I)/Bottom/Right (D)
K = ON – ON – ON	J	Top/Left (D)/Bottom/Right (D)
L = ON – ON – ON (Gold Plated) ①	K	Top/Left (I)/Bottom/Right (I)
M = ON* – NONE – ON	2-Pole	Illumination
P = ON* – NONE – ON (Gold Plated)		
R = ON* – ON – ON* ①	R	None
S = ON* – ON – ON* (Gold Plated) ①	S	Top/Left (D)
T = ON* – ON – ON ①	T	Bottom/Right (D)
U = ON* – ON – ON (Gold Plated) ①	U	Top/Left (I)
	V	Bottom/Right (I)
	W	Top/Left (D)/Bottom/Right (I)
	Y	Top/Left (I)/Bottom/Right (D)
	3	Top/Left (D)/Bottom/Right (D)
	4	Top/Left (I)/Bottom/Right (I)
1st and 2nd Digit Indicators		
NE = 7 – 9 Illumination		
NF = 8 – 10 Illumination		
NK = Dual Illumination		
N9 = Dual Illumination with 8 – 9 Jumper		

LED (Top/Left)	LED (Bottom/Right)
1 Digit	1 Digit
X = None	X = None
14 V Standard	
J = Red	
K = Green	
L = Amber (Standard)	
M = Blue	
14 V Over/Reverse Voltage Protection	
1 = Red	
2 = Green	
3 = Amber (Standard)	
7 = Blue	
28 V Standard	
E = Red	
F = Green	
G = Amber (Standard)	
H = Blue	
28 V Over/Reverse Voltage Protection	
4 = Red	
5 = Green	
6 = Amber (Standard)	
8 = Blue	


LED Wavelengths:
Red = ~ 630 nm    Amber = ~ 592 nm
Green = ~ 526 nm    Blue = ~ 472 nm

Icon (Top/Left)
2 Digits
XX = None <i>See Icon Table on Page 11</i>

Lens/Icon Color (Bottom/Right)
1 Digit
X = None
Lens Color
R = Red
G = Green
B = Blue
A = Amber
W = White
Decorative Icon Color
1 = Daylight White
2 = Deadfront

Special Feature
1 Digit
X = None <i>For Eaton use only</i>

Special Feature
1 Digit
X = None <i>For Eaton use only</i>



Below panel rocker switch with two snap-in lenses

① Double-pole only. (*See Switch Circuit Schematics on Page 6 and Illumination Circuit Schematics on Page 7.*)

\* = Momentary. (I) = Independent. (D) = Dependent.

### Examples

SACS2X — Below Panel Basic Switch Only — 1-pole ON – NONE – ON circuit in standard frame with green 14 volt dependent over/reverse voltage protected LED in top position.

2GAQXXXXX — Below Panel Actuator Only — Actuator with green snap-in lens in top position and AQ icon pad-printed in white.

SACS2X2GAQXXXXX — Below Panel Switch with Actuator Assembled — 1-pole ON – NONE – ON circuit in standard frame with green 14 volt dependent over/reverse voltage protected LED in top position, Actuator with green snap-in lens in top position and AQ icon pad-printed in white.

SNESEX6RCQXXXXX — Below Panel Indicator — Single red snap-in lens in top location with white pad-printed CQ icon and 28 volt red LED.

### Notes

Standard color for pad printing RED, GREEN and BLUE lens will be WHITE.

Standard color for pad printing AMBER and WHITE lens will be BLACK.

Icons to be centered on lens.










Icon orientation per Icon Selection Table; alternate orientation will require a new 2-digit icon assignment. (*See Icon Selection Table on Page 11.*)
















# Electrical Circuit Descriptions

## SWITCH CIRCUIT SCHEMATICS

CODE	SINGLE-POLE SCHEMATIC (Shown in Top/Left Actuated Position)			
		TOP/LEFT ACTUATED	CENTER	BOTTOM/RIGHT ACTUATED
A C (GOLD)		ON	NONE	ON
		2-3	-	2-1
D E (GOLD)		ON	OFF	ON
		2-3	-	2-1
F G (GOLD)		MOM ON	OFF	MOM ON
		2-3	-	2-1
H J (GOLD)		MOM ON	OFF	ON
		2-3	-	2-1
K L (GOLD)	DOUBLE-POLE ONLY			
M P (GOLD)		MOM ON	NONE	ON
		2-3	-	2-1
R S (GOLD)	DOUBLE-POLE ONLY			
T U (GOLD)		MOM ON	ON	ON
		2-3	2-1	2-1

DOUBLE-POLE SCHEMATIC (Shown in Top/Left Actuated Position)			
	TOP/LEFT ACTUATED	CENTER	BOTTOM/RIGHT ACTUATED
	ON	NONE	ON
	2-3 5-6	- -	2-1 5-4
	ON	OFF	ON
	2-3 5-6	- -	2-1 5-4
	MOM ON	OFF	MOM ON
	2-3 5-6	- -	2-1 5-4
	MOM ON	OFF	ON
	2-3 5-6	- -	2-1 5-4
	ON	ON	ON
	2-3 5-6	5-4-2-3	5-4-2-1
	MOM ON	NONE	ON
	2-3 5-6	- -	2-1 5-4
	MOM ON	ON	MOM ON
	MOM ON	ON	ON
	2-3 5-6	2-1 5-4	2-1 5-4

### Circuit










The SVR switch is capable of 1- or 2-pole configurations with 2- or 3-position maintained, momentary, or a combination of actuations. The addition of jumpers between switch terminals expands the circuit possibilities.

Contact your Eaton sales representative for more specific information about SVR standard and custom circuit options.



# Illumination Circuit Descriptions

## ILLUMINATION CIRCUIT SCHEMATICS

SINGLE-POLE CODE	DOUBLE-POLE CODE	SCHEMATIC ①	ILLUMINATION CODE	SCHEMATIC ②
A	R	NONE		
C	S		9	
D	T			
E	U			
F	V			
G	W			
H	Y			
J	3			
K	4			

① LED for terminals 7 – 9 is at top/left side of switch.  
LED for terminals 8 – 10 is at bottom/right of switch.

DECORATIVE ICON COLOR EXAMPLES

**NON-ILLUMINATED**


Deadfront


Daylight White

**ILLUMINATED**


Deadfront


Daylight White

### Illumination

Long life LEDs provide back-lighting illumination for the SVR switch. Backlighting can be either independent of or dependent on the switch circuits, or a combination of both. Standard LED color is amber, with red, green and blue also available. LED protection circuitry is available to protect the LED from overvoltage and reverse voltage conditions.

Contact your Eaton sales representative for more specific information about standard and custom circuit options.






Above panel rocker switch with two green snap-in lenses





# Dimensions



APPROXIMATE MM (INCHES)

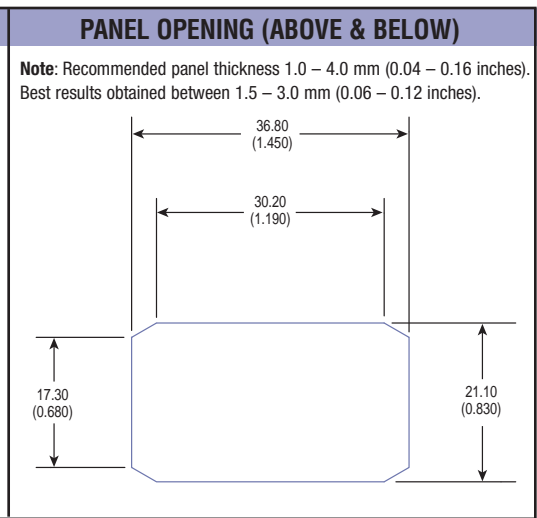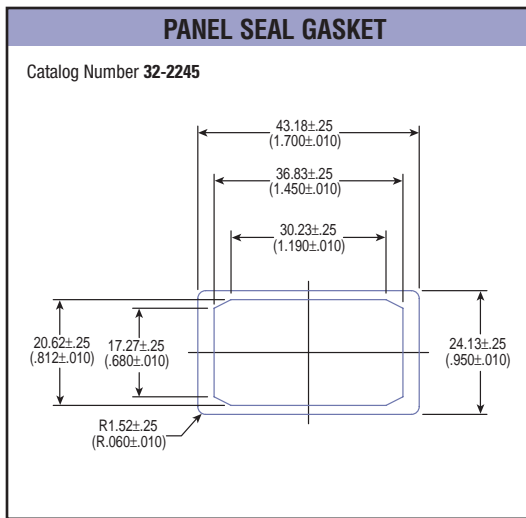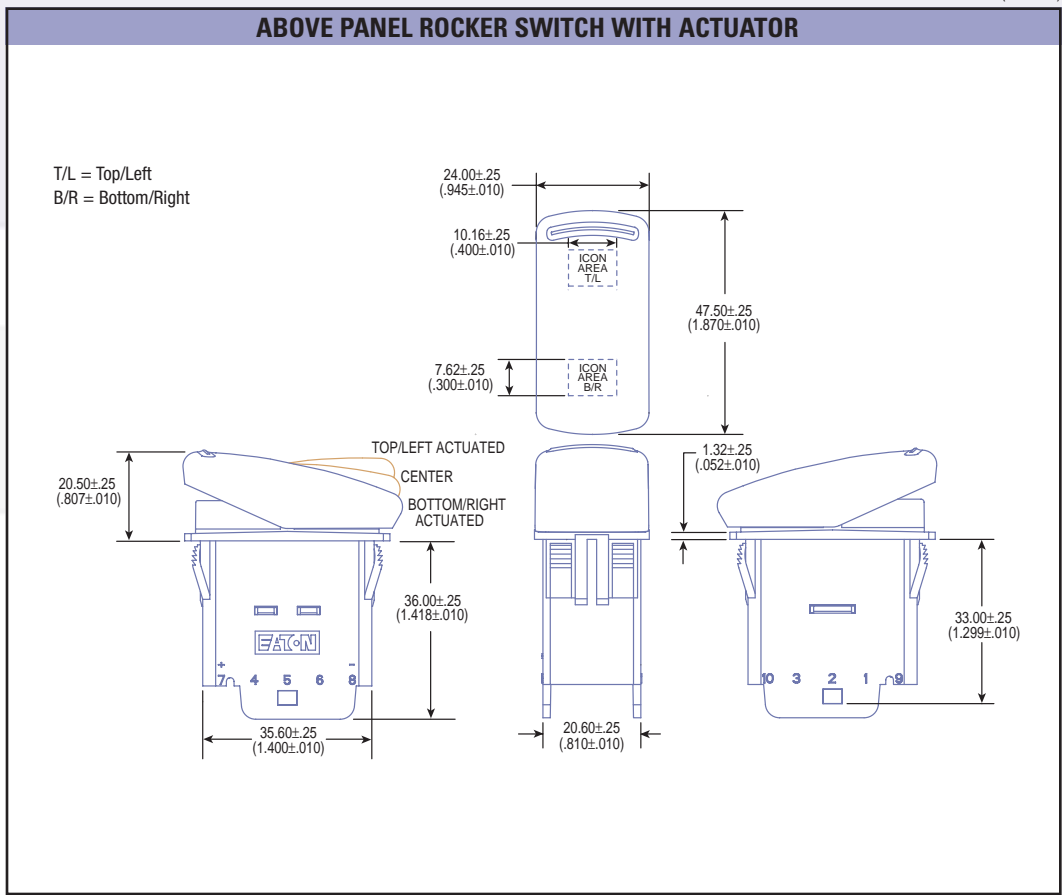



# Dimensions

APPROXIMATE MM (INCHES)

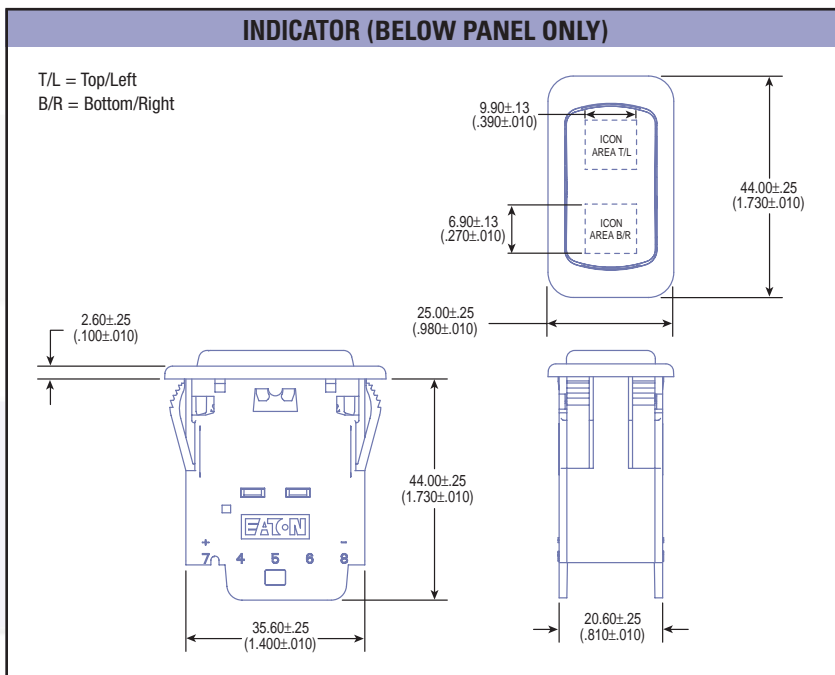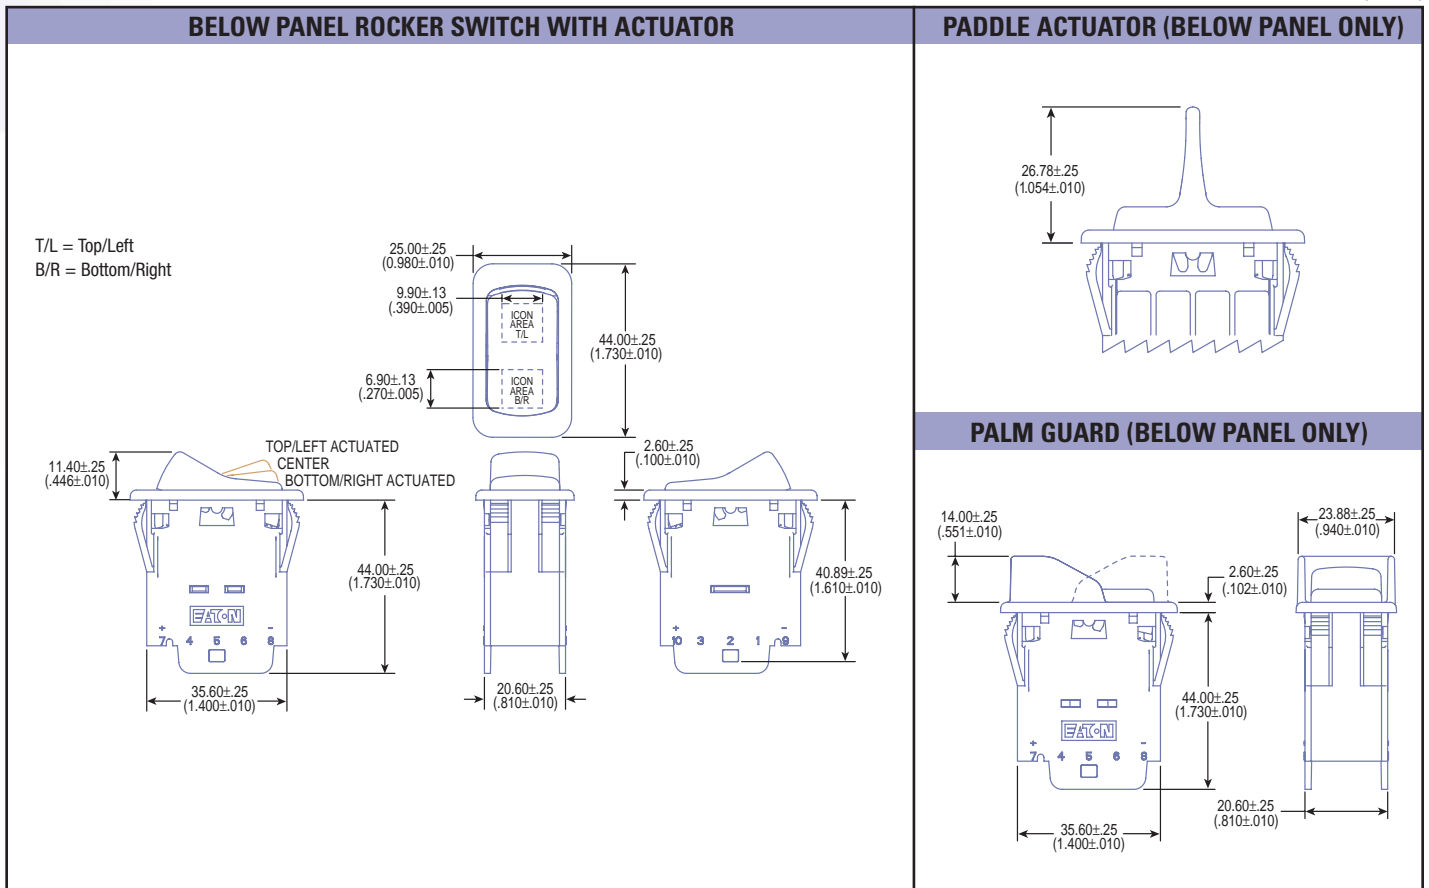




# Accessories Dimensions

APPROXIMATE MM (INCHES)


## GANG-MOUNT SYSTEM

End: Catalog Number **17-22146**  
 Center: Catalog Number **17-22152**

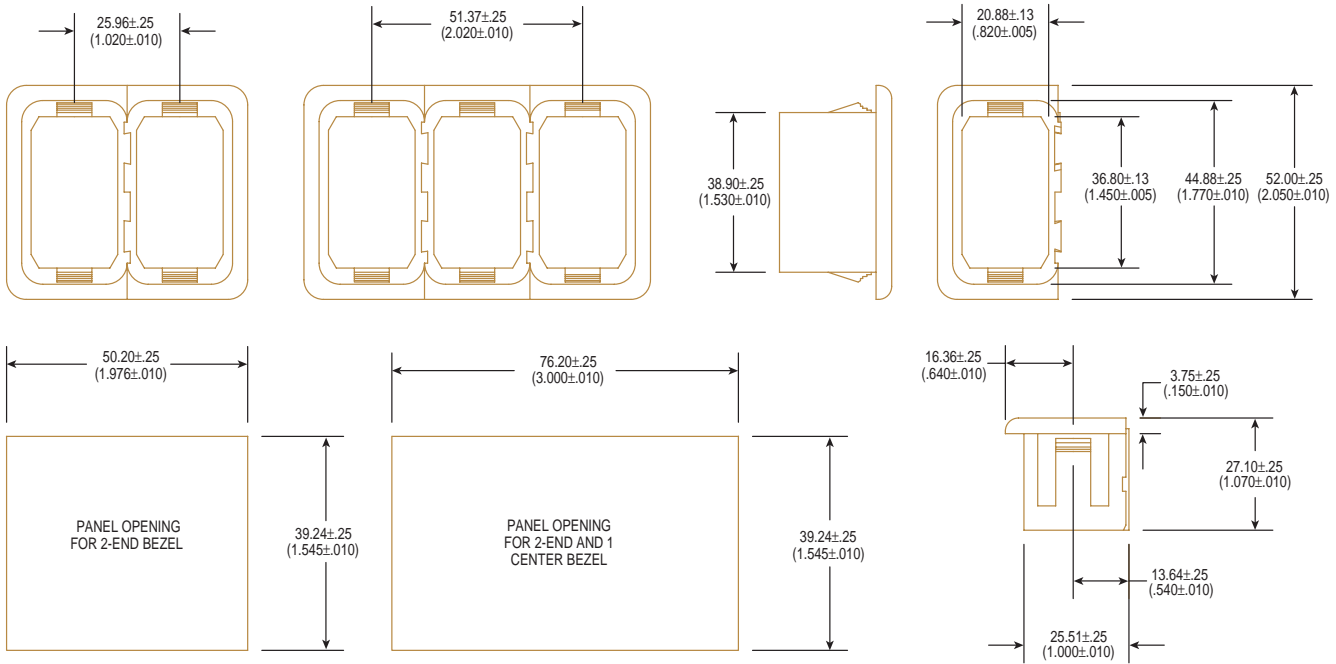

## PANEL PLUG

Catalog Number **17-22145**

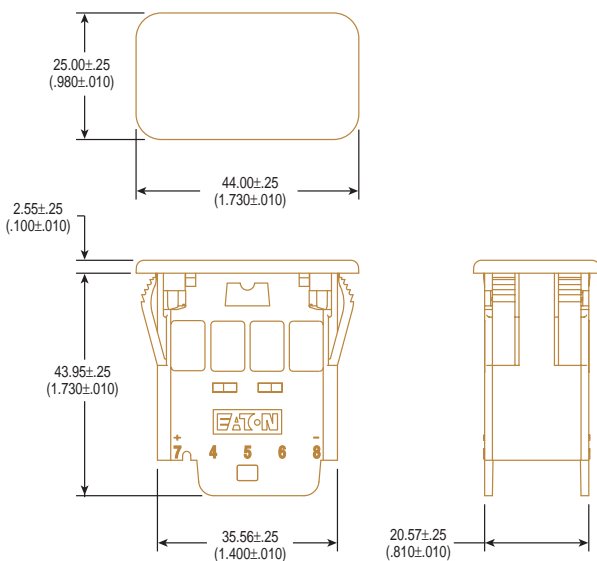


## CONNECTOR

Catalog Number: **25-13936**









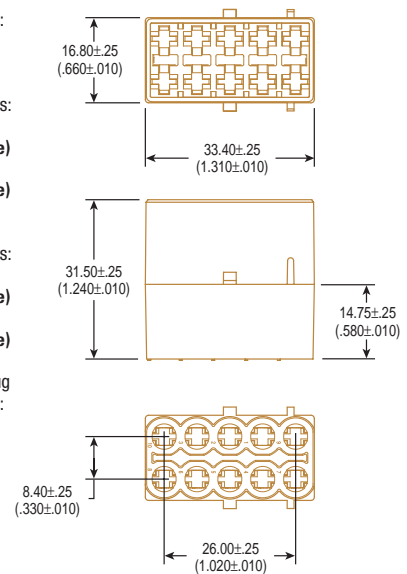

























































AMP Terminal  
 Catalog Numbers:  
 • **927766-3**  
 (14 – 16 gauge)  
 • **927770-3**  
 (18 – 20 gauge)

AMP Wire Seal  
 Catalog Numbers:  
 • **828905-1**  
 (14 – 16 gauge)  
 • **828904-1**  
 (18 – 20 gauge)

AMP Sealing Plug  
 Catalog Number:  
 • **828922-1**



# Icon Selection Table

ICON	CODE	ICON	CODE	ICON	CODE	ICON	CODE	ICON	CODE
	AA		AR		BI		DN		HY
	AB		AS		BJ		DQ		KR
	AC		AT		BK		DR		LX
	AD		AU		BL		DS		MV
	AE		AV	<b>3</b>	BP	START	DX		MW
	AF		AW	<b>1</b>	BQ	STOP	DY		NF
	AG		AX		BR		EI		NG
	AH		AY		BS		FC	<b>F</b>	NJ
	AJ		BA		BZ		FF	<b>N</b>	NK
	AK		BB		CF		GH	<b>R</b>	PA
	AL		BC		CP		GI		QE
	AM	<b>—</b>	BE		CQ		GU		QL
	AN		BF		CS		HA		RW
	AP		BG		CV		HM		RX
	AQ		BH		CW		HN		SB

**Note:** Other standard icons are available. Contact your Eaton sales representative for a complete listing of standard icons.





**Eaton Corporation is a diversified industrial manufacturer with 2003 sales of \$8.1 billion. Eaton is a global leader in fluid power systems and services for industrial, mobile and aircraft equipment; electrical systems and components for power quality, distribution and control; automotive engine air management systems and powertrain controls for fuel economy; and intelligent drivetrain systems for fuel economy and safety in trucks. Eaton has 54,000 employees and sells products to customers in more than 100 countries. For more information, visit [www.eaton.com](http://www.eaton.com).**

Eaton Corporation  
1100 East Preston Street  
Selma, NC 27576-005  
tel: 1-800-525-2000  
United States

Technical Questions:  
[SVR@Eaton.com](mailto:SVR@Eaton.com)

Commercial Controls Customer  
Service Center  
tel: 1-800-962-0820  
fax: 1-828-651-0520  
[www.CommercialControls.Eaton.com](http://www.CommercialControls.Eaton.com)

European  
Commercial Controls Customer  
Support Center  
tel: (+31) 74 246 7088  
fax: (+31) 74 246 7070  
e-mail: [vcbusupport@eaton.com](mailto:vcbusupport@eaton.com)



© 2004 Eaton Corporation  
All Rights Reserved  
Printed in USA  
Publication No. BR07002001E / Z2671  
August 2004