


Glass Passivated Junction Rectifier



FEATURES

- Superrectifier structure for high reliability application
- Cavity-free glass-passivated junction
- Low forward voltage drop
- Low leakage current, typical I_R less than 0.1 μA
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

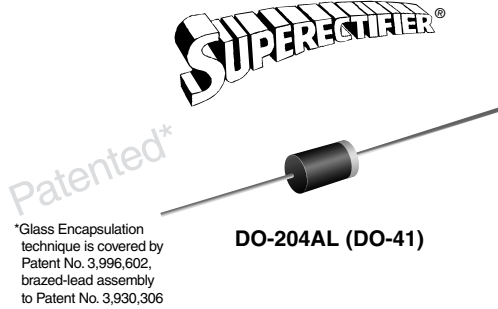

RoHS
COMPLIANT

TYPICAL APPLICATIONS

For use in general purpose rectification of power supplies, inverters, converters and freewheeling diodes for both consumer and automotive applications.

MECHANICAL DATA

Case: DO-204AL, molded epoxy over glass body
Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test, HE3 suffix for high reliability grade (AEC Q101 qualified), meets JESD 201 class 2 whisker test

Polarity: Color band denotes cathode end

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	1.0 A
V_{RRM}	50 V to 1000 V
I_{FSM}	30 A
I_R	5.0 μA
V_F	1.1 V
T_J max.	175 °C

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)									
PARAMETER	SYMBOL	1N4001GP	1N4002GP	1N4003GP	1N4004GP	1N4005GP	1N4006GP	1N4007GP	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage ⁽¹⁾	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage ⁽¹⁾	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5 mm) lead length at $T_A = 75$ °C ⁽¹⁾	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load ⁽¹⁾	I_{FSM}	30							A
Maximum full load reverse current, full cycle average 0.375" (9.5 mm) lead length $T_A = 75$ °C ⁽¹⁾	$I_{R(AV)}$	30							μA
Operating junction and storage temperature range ⁽¹⁾	T_J, T_{STG}	- 65 to + 175							°C

Note:

(1) JEDEC registered values

1N4001GP thru 1N4007GP

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)										
PARAMETER	TEST CONDITIONS	SYMBOL	1N4001GP	1N4002GP	1N4003GP	1N4004GP	1N4005GP	1N4006GP	1N4007GP	UNIT
Maximum instantaneous forward voltage	1.0 A	V_F				1.1				V
Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾	$T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$	I_R				5.0 50				μA
Typical reverse recovery time	$I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}				2.0				μs
Typical junction capacitance	4.0 V, 1 MHz	C_J				8.0				pF

Note:

(1) JEDEC registered values

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)									
PARAMETER	SYMBOL	1N4001GP	1N4002GP	1N4003GP	1N4004GP	1N4005GP	1N4006GP	1N4007GP	UNIT
Typical thermal resistance ⁽¹⁾	$R_{\theta JA}$				55				$^\circ\text{C/W}$
	$R_{\theta JL}$				25				

Note:

(1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted


ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
1N4004GP-E3/54	0.335	54	5500	13" diameter paper tape and reel
1N4004GP-E3/73	0.335	73	3000	Ammo pack packaging
1N4004GPHE3/54 ⁽¹⁾	0.335	54	5500	13" diameter paper tape and reel
1N4004GPHE3/73 ⁽¹⁾	0.335	73	3000	Ammo pack packaging

Note:

(1) Automotive grade AEC Q101 qualified

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AL (DO-41)

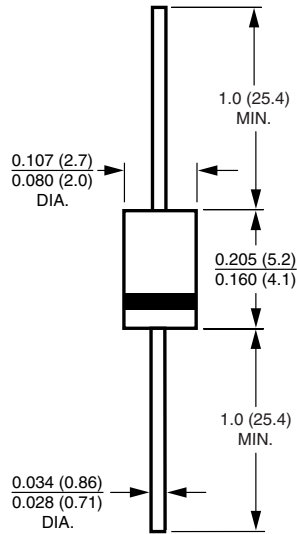

Note: Lead diameter is $\frac{0.026 (0.66)}{0.023 (0.58)}$ for suffix "E" part numbers