

MODEL TL-5930/F


For Utility Metering Applications

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




- Nominal capacity @ 4 mA, to 2 V 19 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 230 mA
- Maximum pulse current capability 500 mA
- Weight 105 g (3.7 oz)
- Operating temperature range -55 °C to +85 °C
- Li metal content approx. 5 g
- U.L. Component Recognition, MH 12193

TADIRAN
LITHIUM
BATTERIES

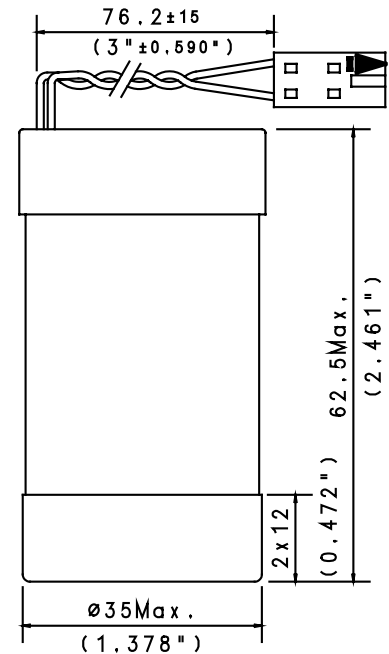

ADDITIONAL INFORMATION

CONNECTOR TYPE:
HOUSING MOLEX 50-57-9402
CONTACTS MOLEX 16-02-0086
CATALOGUE NO. 15-5930-40000

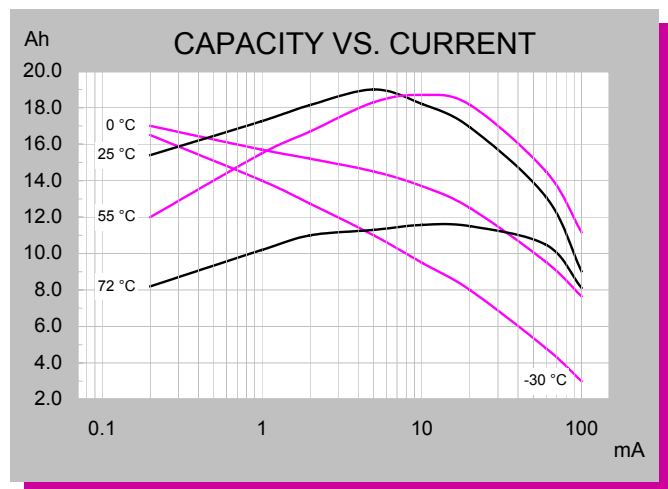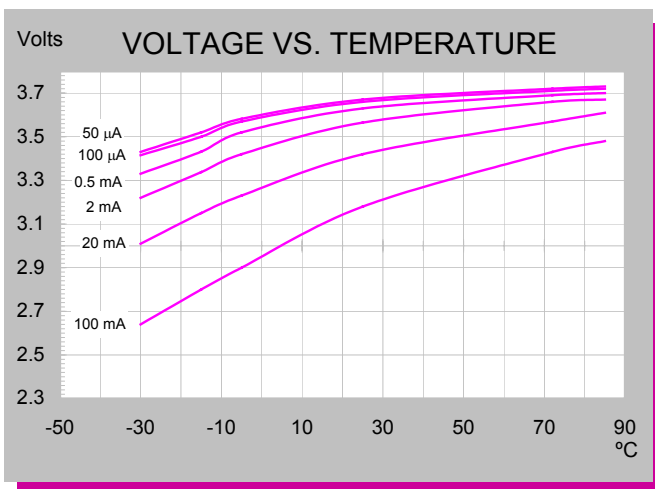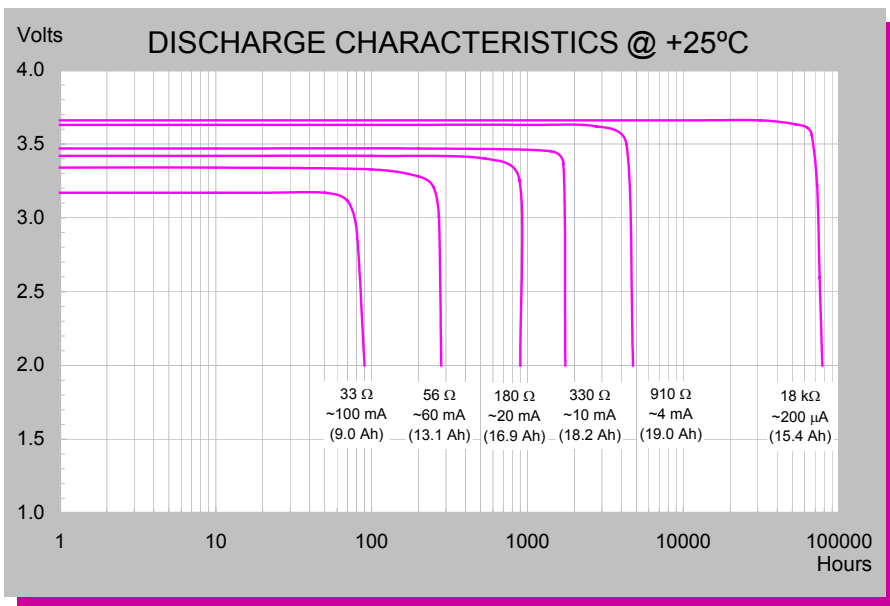

iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. D 01/06