
MULTI-FUNCTION MODULES



Primary Power Components Division

[AC Receptacles Cross Reference](#)

[International Connector Specification Listin](#)

**RoHS
Compliant**

Double Fuseholder Modules IEC320 - C14

Max Rating:

UL 6A/115VAC⁽¹⁾, 10A/250VAC⁽²⁾, 15A/250VAC⁽³⁾
 CSA 4A/250VAC⁽⁴⁾, 5A/250VAC⁽⁵⁾, 6A/250VAC⁽⁶⁾, 10A/250VAC⁽⁷⁾
 VDE 10A/250VAC⁽⁸⁾



D



E



F

Multi-Function Modules. Both snap-in and screw mount incorporates an IEC male power inlet, fuseholder and optional voltage selector and power switch.

Part Number		Description	Housing Type	Terminals	Fuseholder Type	Power Switch	Voltage Selector	Figure
763-00/001 ⁽²⁾⁽⁶⁾⁽⁸⁾		Screw Mount	Plastic	Solder Tab	*	DPST	Front	D*
764-00/002 ⁽²⁾⁽⁷⁾⁽⁸⁾		Screw Mount	Plastic	Solder Tab	5 x 20	DPST	Front	E
764-00/003 ⁽²⁾⁽⁷⁾⁽⁸⁾		Screw Mount	Plastic	Solder Tab	5 x 20	DPST	Front	F




* Fuseholder for 5x20 mm (EURO) or 6.3 x 32 mm (North American Type).

Qualtek Electronics Corporation

THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION		APPROVED
B	RoHS Compliancy		DP
C	Updated Specifications		DP

MECHANICAL DIMENSIONS:

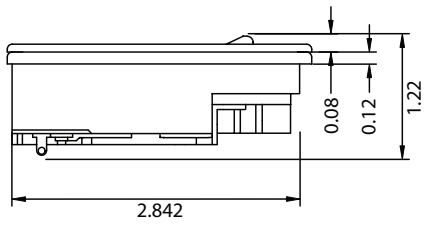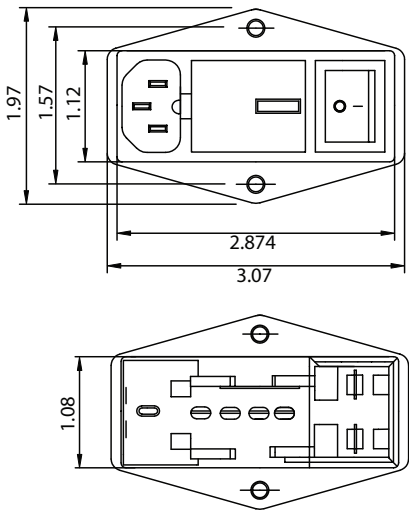


NOTES:

ELECTRICAL CHARACTERISTICS:
 RATED CURRENT:
 UL / CSA / SEMKO @ 250 VAC.....10 AMP
 DPST POWER SWITCH:
 UL / CSA / @ 250 VAC.....10 AMP
 SEMKO @ 250VAC.....10 AMP
 VOLTAGE SELECTOR CARD:
 100-120 VAC or 200-240 VAC INPUT VOLTAGE
 UL / CSA / SEMKO @ 250.....10 AMP
 DOUBLE 5x20mm FUSEHOLDER
 SOLDER TAB TERMINALS
 FLAMMABILITY CLASS UL94V-0
 PLASTIC CASE
 SCREW MOUNT TYPE
 APPROVALS: UL, CSA, SEMKO
 RoHS COMPLIANT

CONTROLLED

ELECTRICAL SCHEMATIC:



		Qualtek Electronics Corp.		
		PPC DIVISION		
		Part Number:	764-00/003	RoHS Compliant
		Description: MULTI-FUNCTION MODULE		
Dim range (mm)	Tolerance +/- (mm)	Drawn / Date B.ZHANG		
0-1	0.15			
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70			
120-250	0.90			
250-500	1.20	UNIT: in		