


Heavy Duty Terminal Blocks

985 GP Series - Deadfront Type

600 Volts

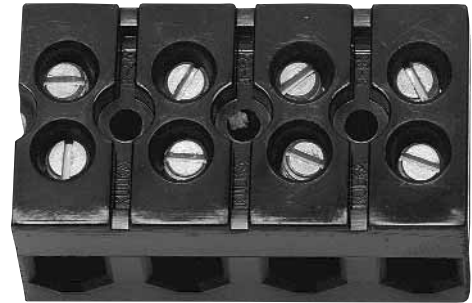

Specifications:

- Base, General Purpose Phenolic, 150°C
- Connector, Aluminum, Tin Plated
- Screws, Steel, Nickel Plated
- Wire Range #4-#18 AWG Copper Wire – 85 Amps
- Multiple Wire Combinations For Solid Or Stranded Copper Wire Are:

1 #18 AWG to 1 #4 AWG	2 to 6 #14 AWG
2 #8 AWG	2 to 6 #16 AWG
2 to 4 #10 AWG	2 to 8 #18 AWG
2 to 4 #12 AWG	
- .625 Center-Line Spacing
- UL Recognized File No. XCFR2.E47811
- CSA Certified File No. LR19766
- C E - Wire Range Reduced #6-#18 AWG

Catalog #	# of poles	Dimensions	
		A	B
985 GP 02	2	1.16	N/A
985 GP 03	3	1.78	0.63
985 GP 04	4	2.41	1.25
985 GP 05	5	3.03	1.88
985 GP 06	6	3.66	2.50
985 GP 07	7	4.28	3.13
985 GP 08	8	4.91	3.75
985 GP 09	9	5.53	4.38
985 GP 10	10	6.16	5.00
985 GP 11	11	6.78	5.63
985 GP 12	12	7.41	6.25

MM = Dim X 25.4

