

SEARCH OUR PRODUCTS

aluminum electrolytic & organic semiconductor



power film

tantalum ceramic

TECH TOOLS

## Aluminum Electrolytic Capacitors

+85°C Standard Axial Lead Aluminum Electrolytic Capacitors



Part Number: **226TTA450M**

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)

### Electrical Specifications

**Capacitance:** 22.0 uF

**Tolerance:** -20 %, +20 %

**Dissipation Factor:** 0.25 at 120 Hz

**ESR:** 18.839 Ohms at 20° C and 120 Hz

**Impedance:**

- and -

- and -

**Impedance Ratios:**

5.0 -25°C/20°C

0.0 -40°C/20°C

**Load Life:**

2000 Hours at 85°C with 100% of rated voltage and with 0% of rated ripple current

**Temperature Range:** -40°C to +85°C

**WVDC:** 450 volts DC

**SVDC:** 500. volts DC

**Leakage Current:**

496.0 uA after 1 Minute

**Ripple Current:**

150.0 mA at 120 Hz and 85°C


### Physical Specifications

**Diameter (D):** 16.0 mm + 0.5 mm

**Length (L):** 30.0 mm + 2.0 mm

**Lead Wire Diameter (d):** 0.8 mm + 0.05 mm

**Lead Length:** 35mm

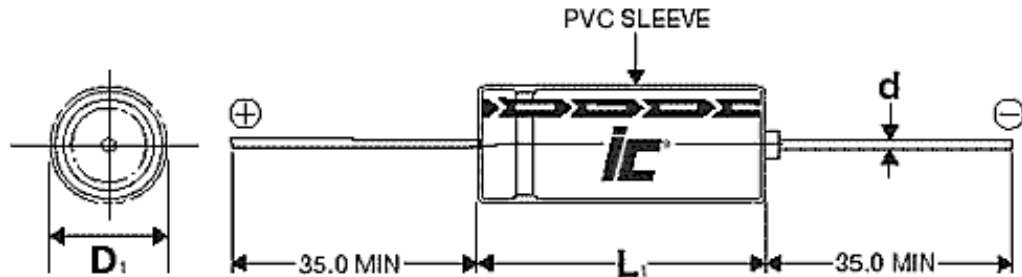

**Add To Sample Cart**  
(You can always remove it later)