

**Plug-in Screw Connector System for Printed Circuit Boards**

**TYPE 121-A-111**

0.2 in. spacing - 2 to 24 poles




Series	Download PDF	3D Model	Can plug with	How to order	Color specifications	Print
--------	--------------	----------	---------------	--------------	----------------------	-------




121-A-111



One possible variation of assembly



RoHS WEEE Pb free compliant

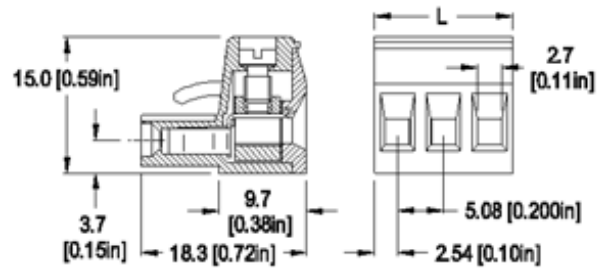

Dimensions: mm (in.)

Length of Connector (L)

L = No. of Poles x Center to Center Spacing

When locating connector, allow 0.5 mm clearance around it for process-induced variations.

**Approval Information**

UL File No.E69841

CSA File No.LR24322



Rating	Current(A)	Voltage(V)	Application group	AWG
UL	15	300	B	26-12
UL	10	300	D	26-12
CSA	10	300	B,D,E	26-12

\* UL: 24-26 AWG range for factory wiring only.

**Screw Tightening Torque:**

UL: 4.5 lbf·in

CSA: 0.51 Nm

**International Approvals:**



Rated Impulse Withstand Voltage: 2500 V

**Description**

- Plug
- Plug-In Direction and Wire Entrance Parallel to PCB when plugged with **121-M-111 /-211**, **121-M-151 /-251**, **121-M-153 /-253** and **121-M-181 /-281**
- Plug-In Direction Perpendicular to PCB and Wire Entrance Parallel to PCB when plugged with **121-M-121 /-221**, **121-M-161 /-261**, **121-M-163 /-263**

**Technical Data**

**Center to Center Spacing:** 5.08 mm (0.200 in.)

**Nominal Cross Section:**

2.5 mm<sup>2</sup> (3874 mils<sup>2</sup>)

**Wire Stripping Length:** 7 mm (0.28 in.)

**Illustration**

**Material**



Coding keys **120-K** are available to prevent the insertion of the wrong plug into a header. These are usually field inserted but can be factory installed if required.

**Molding:** Polyamide, self extinguishing UL 94, V-0, color grey

**Temperature limits:**

**Short Time:** 140°C (284°F)

**Continuous:** RTI 105°C (221°F)

**Low Limit:** -40°C (-40°F)

**Comparative Tracking Index:** CTI > 600

**Oxygen Index Rating:** 33%

**Terminal Body:** Nickel plated copper alloy

**Wire Protector and Contact Spring:** Tin plated copper alloy

**Screw:** M3, Slotted head, zinc plated blue passivated, steel substrate

[Top of page](#)

## How to order

**Item** 121-A-111

### Options

CN: Consecutive Numbering (hot stamped numbers)

SM: Special Marking (please provide sketch)

BS: Copper Alloy Screw

PS: Clear Chromate Passivated, zinc plated, Steel Screws

G05: Gold Plating (5 micro inches)

G30: Gold Plating (30 micro inches)

S30: Silver Plating (30 micro inches)

SRF: Strain Relief (available for 2 to 8 poles only)

**Note:** Plated component: contact spring

**Ordering Note:** Voltage rating for 0.4 in. spacing is UL certified for 15A - 300V / C and for 5A - 600V / D and CSA certified for 600 / D,E (121-A-112).

121-A-111/

POLES:  
02 to 24

[Request sample](#)

[Request quote](#)

Quantity

### Accessories

[BST Self Adhesive Marking Strips.](#)

[Consecutively numbered.](#)

[Jumper, Type 970-J1.](#)

[Add to shopping cart](#)