


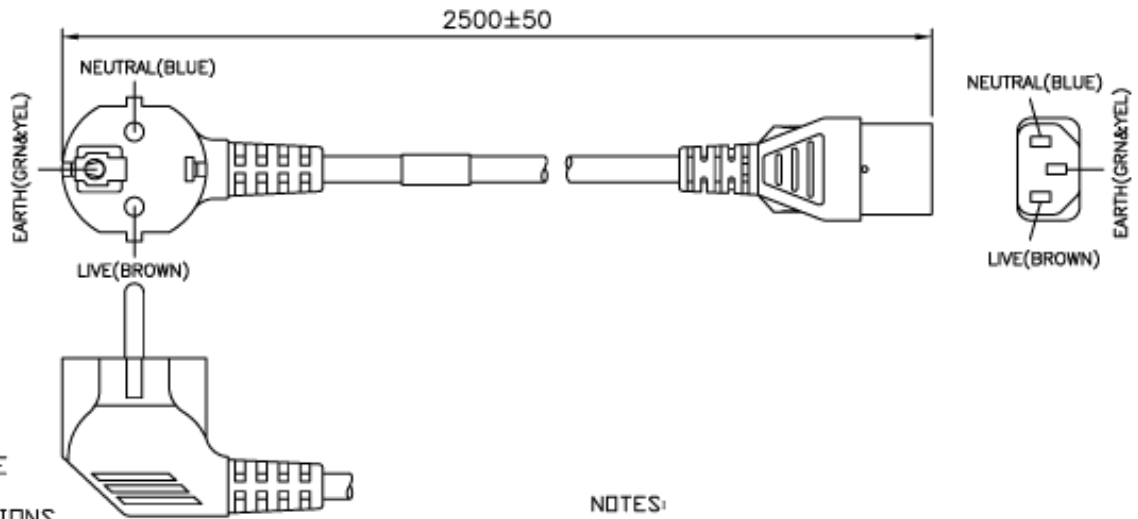
VOLEX

GROUP

Standard Cord Details: 2125H 10 C3




Specifications	
Certifications	
Part Number	2125H 10 C3
Connector Type	C13
Plug Type	2 pins and earth contact
Category	Plastic
Application	Detachable
Plug Catalog No.	M2511A
Connector Catalog No.	V1625
Cable	H05VV-F 3x1.00
Jacket Color	Mid Gray
Length in Feet	8.2'
Length in Meters	2.5
Temperature Rating	60C
Packaging Units Per Carton	B-50
Color Coding	
Nominal OD in Inches	
Nominal OD in Millimeters	
Notes	Continental European. Dual Earthing.



VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

PACKAGING: FOLD & TIE

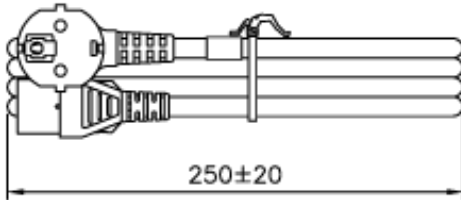

NOTES:

- 1) CORDAGE: H05VVVF3X1.00 SQ MM BLACK
- 2) APPROVALS: DVE, CEPEC, VDE, KEMA, DEMKO, NEMKO, SEMKO, IMQ
- 3) RATING: 10 AMP/250 VOLTS
- 4) PACKAGING: 50 PIECES/CARTON
- 5) ALL DIMENSIONS IN MILLIMETERS.

REV	DESCRIPTION	DATE
1	C.U.D - NEW RELEASE	03/29/06



FORM IN71-07 REV.A

- Indianapolis, IN
- Conover, N.C.
- Fremont, CA
- Aguascalientes, MX
- Tijuana, Mexico
- Hermosillo, MX
- Clinton, AR
- Kanata, Canada

Proprietary Notice:

This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

MATERIAL:
 PLUG: PVC, BLACK LF
 CONNECTOR: PVC, BLACK LF
 JACKET: PVC, BLACK LF

FINISH:
 JACKET: SMOOTH

SCALE:
 NOT TO SCALE

ECD:
 N/A

ITEM DESCRIPTION
 CORDSET - EUROPEAN
 DETACHABLE POWER SUPPLY CORD (2.5 M)

TOLERANCE UNLESS OTHERWISE SPECIFIED
 .XXX ±
 .XX ±
 X ±
 FRACT. ±
 ANGULAR ± 1/2°

APPROVED CR	DRAWN BY MAF	DATE 3/29/06
----------------	-----------------	-----------------

PART NO.
 2125H 10 C3