


AA PRE-CHARGED (DX1500)


Rechargeable NiMH Battery


Retain Power For Up To 365 Days While Not In Use, Unlike Regular Rechargeables!

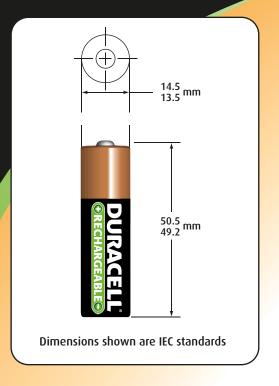

Specifications Nominal Voltage: 1.2V **Nominal Internal** Impedance: 14 m-ohm @ 1 kHz **Rated Capacity:** 2000 mAh Average Weight: 30.2 grams (1.07 ounces) $8.3 \text{ cm}^3 (0.50 \text{ in}^3)$ Volume: Flat Terminals: Operating Temperature Range: -20° C to 50° C (-4° F to 122° F) **ANSI:** 1.2H2

HR₆

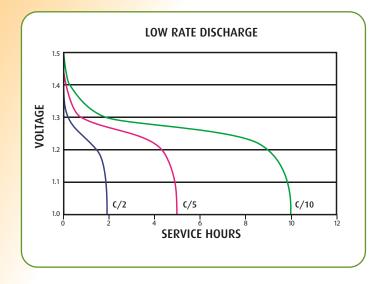

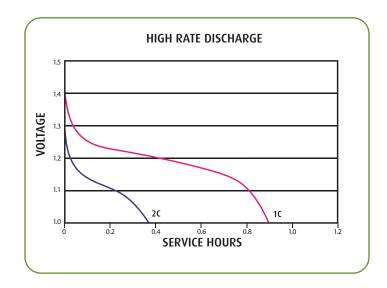

Product can be charged on most NiMH or NiCd chargers utilizing standard dV, dV/dt, time and temperature dynamic charge termination methods. Duracell brand NiMH chargers are recommended for best results.

Delivered capacity is dependent on the applied load, operating temperature, and cut-off voltage. Please refer to the charts and discharge data shown for example of the energy/service life that the battery will provide for various local conditions.

IEC:

This data is subject to change. Performance information is typical. Contact Duracell for latest information.

● RECHARGEABLE →

Berkshire Corporate Park

Bethel, CT 06801 U.S.A. Telephone Toll-free: (North America only) 1-800-544-5454 (Global) 1-203-796-4500 Internet: www.duracell.com