



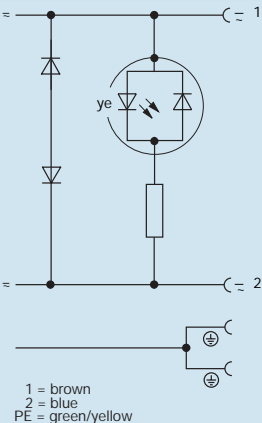

RECTANGULAR CONNECTORS GDM-SERIES

OpenConnector GDM > GAN

Type	GAN-DFFE7X-AG0200C1-XC607-AD
Order No.	934 562-021
	 <p>Cable socket with integrally molded lead (2 m), function indicator (LED), protective circuit (Suppressor-Diode), gasket (captive) and central screw M3 (stainless steel, Phillips cross-head)</p>
Product description	
Other standard types	cable length 5 m: order no. 934 562-022
Number of contacts	2 + PE / connected)
Cable material	PVC
Cable color	grey
Cable length	2 m
Cable diameter	5.5 mm
Conductor size	0.75 mm
Cable specification	LIYY 3G x 0.75 mm ²
Cable type	fire resist. IEC 60332-1, DIN VDE 0472 Part 804 type B
Standard	DIN EN 175 301-803-A
Housing Color	transparent blue
Construction type	A
Description of Wiring	
LED color	LED yellow (bipolar)
Voltage rectifier	-
Suppressor	supressior diode
Other characteristics	-
Drawing	
	 <p>1 = brown 2 = blue PE = green/yellow</p>
Technical data	
Contact dimensions	6.3 mm x 0.8 mm, 4.8 mm x 0.8 mm
Wire stranding	24 x 0.2
Rated voltage	AC/DC 24 V
Rated current	10 A
Contact resistance	≤ 10 mOhm
Mounting	central nut M3
Material	
Contact surface material	Cu/Sn
Contact bearer material	PA 66
Housing material	PUR
Environmental conditions	
Protection class (IEC 60529)	IP 65, IP 67
Pollution severity	3
Temperature range	-25 °C to +80 °C, notice derating
Inflammability class	
Housing	94 HB
Cable	fire resist. IEC 60332-1
Contact bearer	94 V0
Approvals	
UL	-
VDE	VDE
Packing unit	
Packaging unit	50 pieces

Type	GAN-DFFE7X-DN0200C1-XC607-AD	GAN-DFFE7X-FS0200C1-XC607-AD
Order No.	934 562-069	934 562-047
	 <p>Cable socket with integrally molded lead (2 m), function indicator (LED), protective circuit (Suppressor-Diode), gasket (captive) and central screw M3 (stainless steel, Phillips cross-head)</p>	 <p>Cable socket with integrally molded lead (2 m), function indicator (LED), protective circuit (Suppressor-Diode), gasket (captive) and central screw M3 (stainless steel, Phillips cross-head)</p>
Product description		
Other standard types	cable length 5 m: order no. 934 562-064	cable length 5 m: order no. 934 562-048
Cable material	PVC	PUR
Cable diameter	5.8 mm	5.8 mm
Cable specification	LIYY 3G x 0.75 mm ²	LI9Y11Y-HF 3G x 0.75 mm ²
Technical data		
Wire stranding	42 x 0.15	42 x 0.15
Approvals		
UL	UL pending	UL pending