

Functions

The ATC 7DT-2CH DIN Rail Timer is ideally suited for timing applications needing a daily or weekly schedule. The clear LCD display provides visible indication of output, mode, day and time. With two independent channels and 16A contacts, the powerful 7DT-2CH delivers high accuracy in a convenient DIN Rail mounting package.




Two Channel version 7DT-2CH

- Daily, weekly program in one device
- Two independent channels of control
- Automatic conversion summer / winter time
- Switching: according to the program (AUTO)/or manually
- High accuracy of timing due to special calibration
- Easy programming via 4 keys, clear LCD display, min. interval 1 sec.




SPECIFICATIONS		OTHER INFORMATION	
Supply Terminals	A1-A2	Operating Temperature	-20 to +60°C (-4 to 140°F)
Supply Voltage	AC/DC 12-240 V (AC 50-60 Hz)	Storage Temperature	-30 to +70°C (-22 to 158°F)
Consumption	AC 0.5–2 VA / DC 0.4–2 W	Electrical Strength	4kV (supply-output)
Supply Voltage Tolerance	-15%; +10%	Operating Position	any
Summer/Winter Time	automatic	Mounting	DIN Rail EN 60715
OUTPUT		Protection Degree	IP 20
Contacts	2-SPDT	Max. Cable Size Without Cavern: Max. 2x1.5mm² 2x2.5mm² With Cavern: Max. 2x1.5mm², 1x2.5mm²	
Rated Current	16A AC		
Inrush Current	30 A / <3 sec		
Switch Voltage	250 VAC / 24 VDC	Dimensions	90 x 35.6 x 64 mm
Min. Breaking Capacity DC	500 mW		(3.543" x 1.402" X 2.520")
Mechanical Life	>3x10 ⁷	Weight	130g (4.586 OZ)
TIME CIRCUIT		Standards	EN 61812-1, EN 61010-1
Power Back-Up	3 years		
Accuracy	Max. ± 1s/day at 20°C	PROGRAM CIRCUIT	
Minimum Interval	1 sec	Program	Daily, Weekly
Data Stored for	10 years min.	Data Readout	LCD Display

Connection

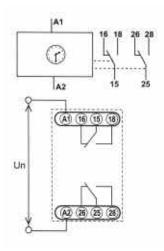




Operation

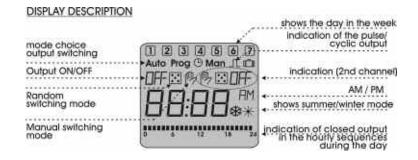

Dimensions (mm)

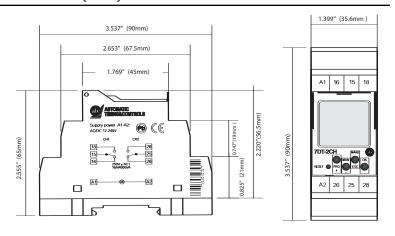

Ordering Information		
Digital Timer	7DT-2CH	





Marsh Bellofram Group of Companies 8019 Ohio River Blvd, Newell, WV 26050