
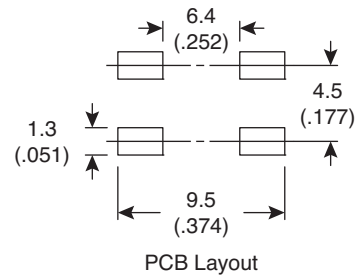
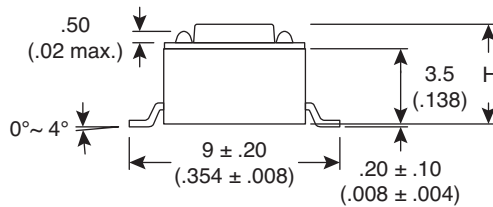

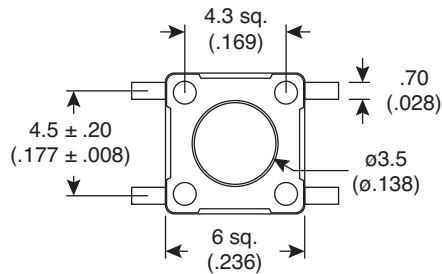


Dimensions: mm (in.)



Mechanical Specifications:

- Type: SPST
- Operating Temperature: -25°~+70°C
- Operating Force: 100 ± 50g
- Storage Temperature: -30°~+80°C
- Travel/Stroke: .25 +.2 / -.1mm)
- Stop Strength: 3Kg for 15 seconds

Electrical Specifications:

- Rating: 50mA/12VDC
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric strength: 250VAC for 1 minute
- Contact resistance: 100mΩ max.
- Electrical life: 500,000 cycles

Materials:

- Cover: stainless steel
- Contacts: silver clad phosphor bronze
- Terminals: silver clad brass
- Base: LCP, UL94V-0, brown
- Stem: Nylon, UL94V-0, black

Note:

- RoHS Compliant and Process Compatible with 260° solder

Tactile Switches (SMD)
101-0465K-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.