
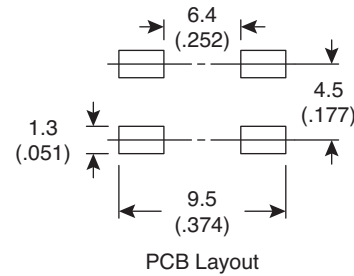
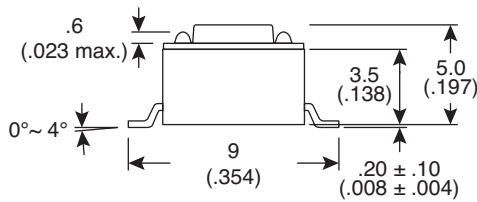

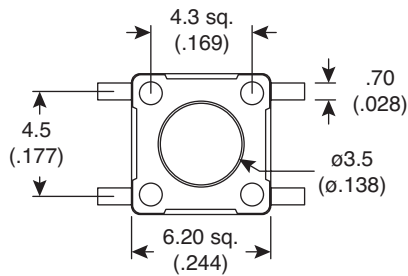


Dimensions: mm (IN)



**Mechanical Specifications:**

- Type: SPST
- Operating temperature: -25°~+70°C
- Operating force: 100 ± 50g
- Storage temperature: -30°~ +80°C
- Travel/Stroke: .25 +.2 / -.1mm
- Stop strength: 3Kg for 15 seconds

**Electrical Specifications:**

- Rating: 50mA/12VDC
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric strength: 250VAC for 1 minute
- Contact resistance: 100mΩ max.
- Electrical life: 1,000,000 cycles

**Material:**

- Cover: stainless steel
- Contacts: silver clad stainless steel
- Terminals: silver plating
- Base: LCP, UL94V-0, brown
- Stem: Nylon, UL94V-0, brown

**Note:**

- RoHS compliant and process compatible with 260° solder

**Tactile Switch**  
101-062KS-EV

