



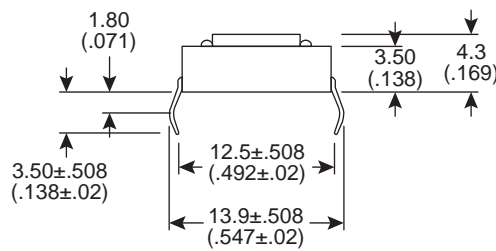


Dimensions: mm (In.)



**Electrical Specifications:**

- Rating: 50mA/12VDC
- Contact resistance: 100mΩ max.
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric strength: 250VAC for 1 minute
- Life: 500,000 cycles

**Soldering Process:**

- Wave soldering temperature: 260°C(500°F) max. for 5 seconds with 1.6mm thick PCB
- Hand soldering temperature: 320°C(608°C) for 2 seconds using a 30W soldering iron

**Material:**

- Button color: brown

**Mechanical Specifications:**

- Type: SPST
- Operation force: 160±50gf
- Stroke: .35mm +.2mm -.1mm
- Operation temperature: -25°~70°C

Tactile Switch (Thru-Hole)

101-0121



Available from Mouser Electronics

www.mouser.com

1-800-346-6873