

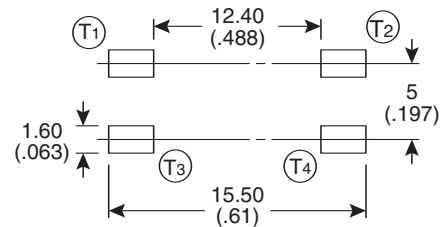
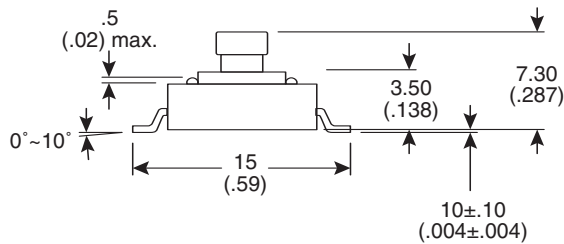
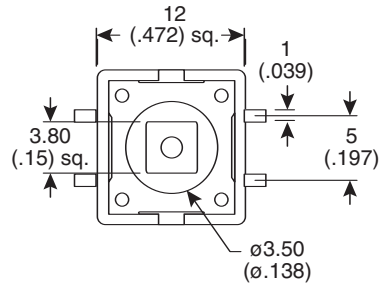


Dimensions: mm (In.)



PCB Layout



Electrical Specifications:

- Rating: 50mA/12VDC
- Life: 500,000 cycles
- Contact resistance: 100mΩ max.
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric Strength: 250VAC for 1 minute

Mechanical Specifications:

- Type: SPST
- Operating force: 160±50g
- Operating temperature: -25°~+70°C
- Storage temperature: -30°~+80°C
- Travel: .012±.004" (.30±.10mm)

Materials:

- Cover: tin plated steel
- Contacts: silver clad phosphor bronze
- Terminals: silver clad brass
- Base: nylon, UL94V-0, black
- Stem: nylon, UL94V-0, brown

Soldering Process:

- Maximum reflow soldering temperature: 240°C for 10 seconds max.

Tactile Switch (SMT)
101-0624

