


Dimensions: mm (In.)

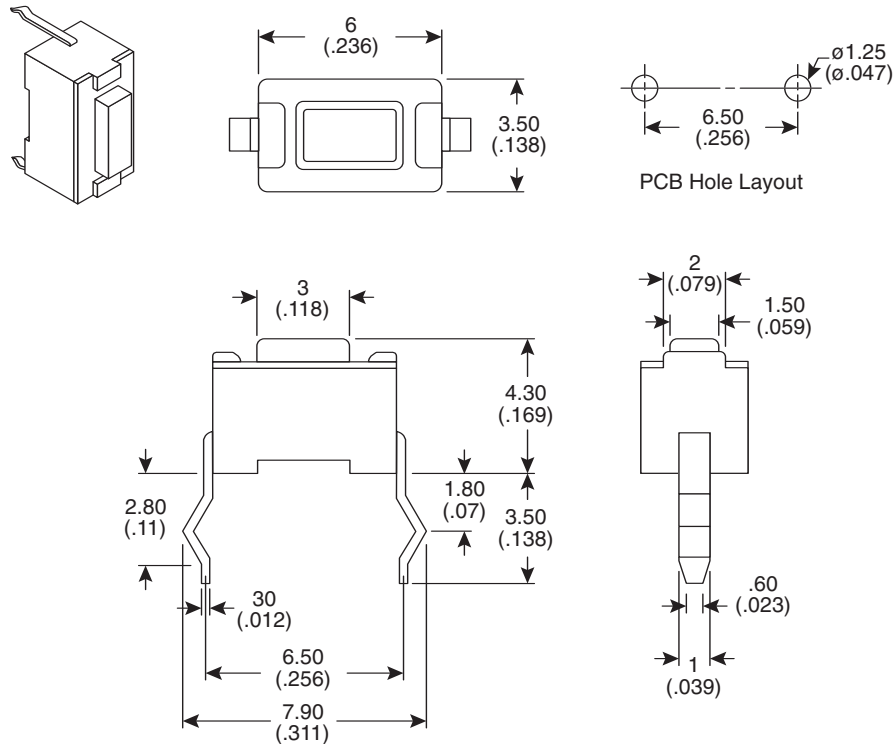

Electrical Specifications:

- Rating: 50mA/12VDC
- Contact resistance: 100mΩ max.
- Insulation resistance: >100MΩ @ 100VDC
- Dielectric Strength: 250VAC for 1 minute
- Life: 50,000 cycles

Mechanical Specifications:

- Circuit: SPST, Off-(On)
- Bounce: <5msec
- Operating force: 160±50gf
- Travel: 0.25 +0.2 -0.01mm
- Operating temperature: -20°~+70°C
- Storage temperature: -30°~+80°C

Soldering Process:

- Soldering temperature: 255°C max. @ <5sec
- Preheat temperature: 100°C max. @ <45sec
- Do not wash after soldering

Tactile Switch (Thru-Hole)
101-0131



Available from Mouser Electronics

www.mouser.com

1-800-346-6873