


Dimensions: mm (In.)

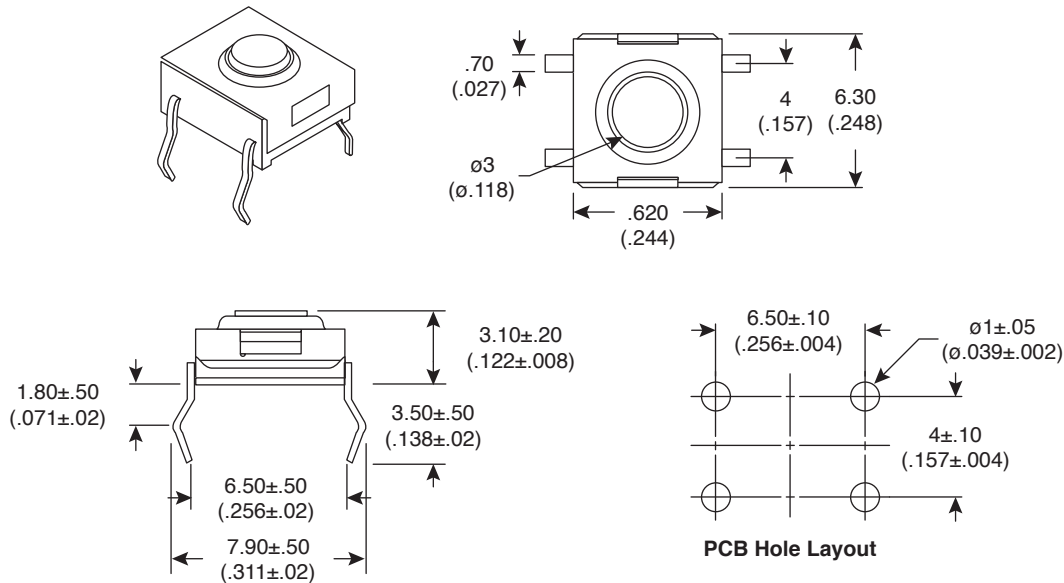

Electrical Specifications:

- Contact resistance: 100mΩ max.
- Insulation resistance: 100MΩ min. @ 500VDC
- Dielectric strength: 250VAC for 1 minute
- Rating: 50mA/12VDC

Mechanical Specifications:

- Life: 100,000 cycles
- Operating force: 160±50gf
- Operation temperature: -25°~+70°C
- Storage temperature: -30°~+80°C
- Travel: .010+.001 (.25 +.02)
- Stop strength: 3Kg for 15 seconds

Materials:

- Cover: stainless steel
- Contacts: silver clad phosphor bronze
- Terminals: silver clad brass
- Base: PPA, UL94V-0, black

Soldering Process:

- Wave soldering temperature: 260°C max. for 5 seconds
- These switches are washable. They can only be submersed after they have been soldered and returned to normal temperature.

Tactile Switch
101-0265

