



CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

[Home](#)

[About CML](#)

[Service](#)

[Media Center](#)


[Contact](#)

[Access CML](#)

Products

Based LEDs

CML IT Based LEDs are an effective alternative for based incandescent lamps. Based LEDs have a number of advantages when compared to miniature lamps. Features include a long life expectancy of up to 100,000 hours with low power consumption. Based LEDs are shock and vibration proof and come in a wide variety of colors, styles and voltages.



Part Number: 18602351

Serial Number: 18602

Based LED type: StarLED

Size (inch): T-3 1/4

Size (mm): T10

Housing Size: 10x25mm

Base: BA9s

Chip number: 1

Chip color: green

Wavelength (nm): 525

Op. voltage (V): 24

Rectifier: Bridge

AC current: 15

DC current: 15



Type IV DC current: 2250

Voltage tolerance (%): 10%

Op. temperature (°C): -20 °C - +60 °C

Storage temperature (°C): -25 °C - +80 °C

RoHS Status: Yes

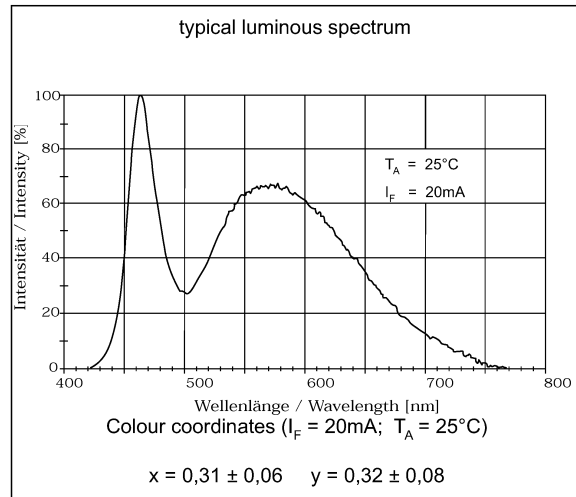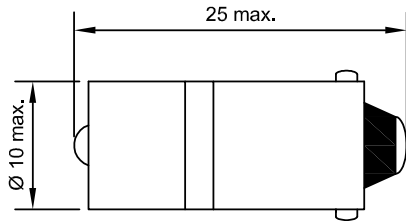

Lampensockel nach DIN EN 60061-1: BA9s / Lamp base in accordance to DIN EN 60061-1: BA9s

Elektrische und optische Daten sind bei einer Umgebungstemperatur von 25°C gemessen.
 Electrical and optical data are measured at an ambient temperature of 25°C.

Bestell-Nr. Part No.	Farbe Colour	Spannung Voltage	Strom Current	Lichtstärke Lumi. Intensity	Dom. Wellenlänge Dom. Wavelength
18602350	Red	24V AC/DC	15mA	350mcd	630nm
18602351	Green	24V AC/DC	15mA	2250mcd	525nm
18602352	Yellow	24V AC/DC	15mA	300mcd	587nm
18602357	Blue	24V AC/DC	15mA	680mcd	470nm
1860235W3	White Clear	24V AC/DC	15mA	1500mcd	$x = 0,31 / y = 0,32$
1860235W3D	White Diffuse	24V AC/DC	15mA	750mcd	$x = 0,31 / y = 0,32$

Lichtstärkedaten der verwendeten Leuchtdioden bei DC / Luminous intensity data of the used LEDs at DC

Lagertemperatur / Storage temperature -25°C - +80°C
 Umgebungstemperatur / Ambient temperature -20°C - +60°C
 Spannungstoleranz / Voltage tolerance +10%

Allgemeiner Hinweis: Bedingt durch die Fertigungstoleranzen der Leuchtdioden kann es zu geringfügigen Schwankungen der Farbe (Farbtemperatur) kommen. Es kann deshalb nicht ausgeschlossen werden, daß die Farben der Leuchtdioden eines Fertigungsloses unterschiedlich wahrgenommen werden.

General: Due to production tolerances, colour temperature variations may be detected within individual consignments.



CML Technologies GmbH & Co. KG
 D-67098 Bad Dürkheim
 (formerly EBT Optronic)

StarLEDs
T3¼ (10x25mm) BA9s with bridge rectifier

				Drawn: J.J.	Ch'd: D.L.	Date: 02.11.04
Revision:	Date:	Name:	Scale: 2 : 1	Datasheet: 1860235xxx		