

SEARCH OUR
PRODUCTS


aluminum
electrolytic &
organic
semiconductor


film


power film


tantalum
ceramic

TECH TOOLS

[PRODUCTS](#) | [PROFILE](#) | [PRESS](#) | [EMPLOYMENT](#) | [LINKS](#) | [CONTACT US](#) | [HOME](#)

Aluminum Electrolytic Capacitors

+85°C Standard Axial Lead Aluminum Electrolytic Capacitors



Part Number: 228TTA035M

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)

Electrical Specifications

Capacitance: 2,200.0 μ F
Tolerance: -20 %, +20 %
Dissipation Factor: 0.16 at 120 Hz
ESR: 0.121 Ohms at 20° C and 120 Hz
Impedance:
- and -
- and -

Impedance Ratios:

2.0 -25°C/20°C

3.0 -40°C/20°C

Load Life:

2000 Hours at 85°C with 100% of rated voltage and
with 0% of rated ripple current

Temperature Range: -40°C to +85°C

WVDC: 35 volts DC

SVDC: 44. volts DC

Leakage Current:


2,310.0 μ A after 1 Minute

Ripple Current:

1,580.0 mA at 120 Hz and 85°C

Physical Specifications

Diameter (D): 16.0 mm + 0.5 mm
Length (L): 30.0 mm + 1.0 mm
Lead Wire Diameter (d): 0.8 mm + 0.05 mm
Lead Length: 35mm

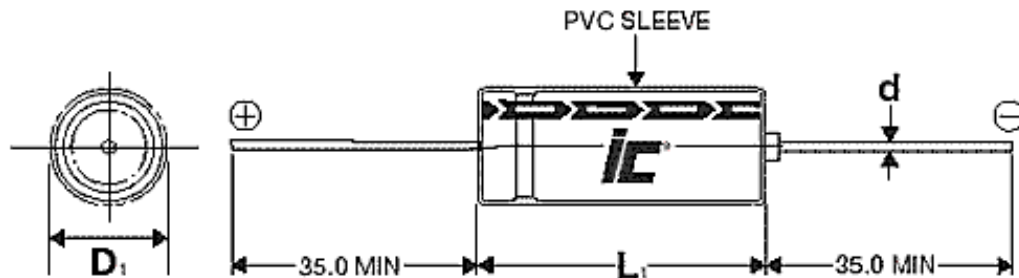

 **Add To Sample Cart**
(You can always remove it later)