




| | | | |
|---------------------|-----------------------|--|-------------------|
| Rating | 1.5A 250V | Mount Hole  | Circuit Structure |
| Contact R | 50m ohm Max | | |
| Insulation R | DC 500V 100M ohm Min. | | |
| Dielectric Strength | AC 1000V 1 minute | | |
| Notices | | | |

| Model NO. | SCI NO. | Color | Rating |
|-----------|---------|-------|--------------|
| R13-24A | 1830245 | BLACK | 球面开双槽 / 黑色脖子 |
| R13-24AL | 1830246 | BLACK | 球面开双槽 / 黑色脖子 |
| R13-24A | 1830247 | RED | 球面开双槽 / 红色脖子 |
| R13-24AL | 1830248 | RED | 球面开双槽 / 红色脖子 |

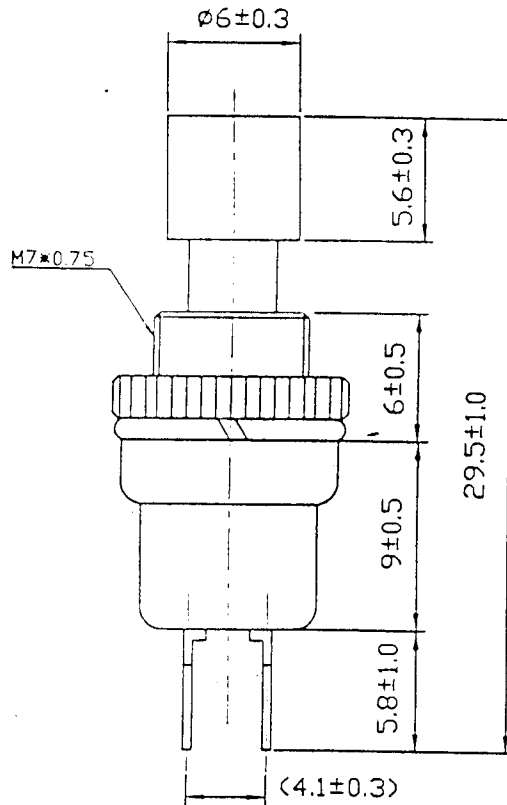

P/N: 241-3241 or P/N: 241-3242

| | | | | | |
|--------------|-----------|---|------|------|--------------|
| Customer No. | See Table | No. | Date | Name | Descriptions |
| SCI No. | See Table | | | | |
| Model No. | R13-24A | | | | |
| Drawing | Check | Approval | | | |
| | 曹俊仁 |  | | | |
| | 87.6.27 | | | | |