


## PSA-15LN

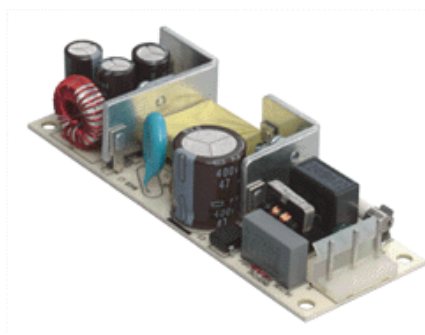

15W UNIVERSAL INPUT  
Compact PCB, 3.3 to 24VDC

### Dimensions

Length: 110mm (4.33in)  
Height: 25.4mm (1.00in)  
Width: 40mm (1.57in)  
Weight: 100gm (3.5oz)


MODEL (3 Wire Version )	DC OUTPUT VOLTAGE	LOAD	
		Min.	Max
PSA-15LN3-033*	+3.3V	0A	3.0A
PSA-15LN3-050	+5V	0A	3.0A
PSA-15LN3-090*	+9V	0A	1.67A
PSA-15LN3-120	+12V	0A	1.25A
PSA-15LN3-150*	+15V	0A	1.0A

PSA-15LN3-180*	+18V	0A	0.83A
PSA-15LN3-240	+24V	0A	0.63A

*\*Note: Special order items. Minimum order quantity of 1000 pieces is required.*



# 15 W Universal Input, Compact PCB, 3.3 to 24VDC PSA15LN Single Output OEM Open Frame

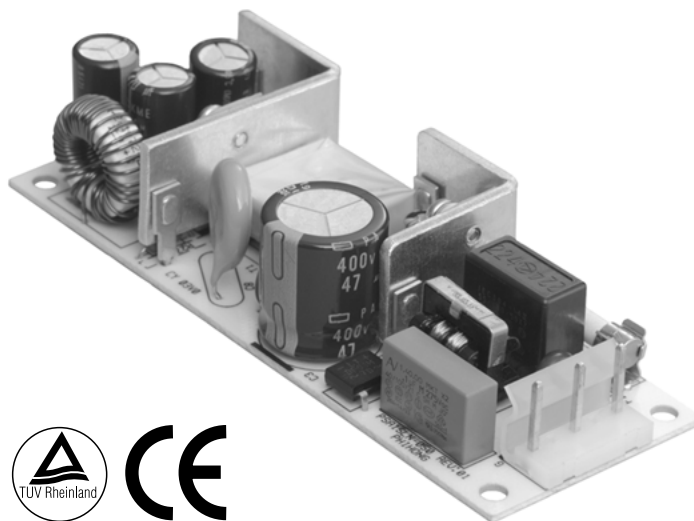

## Features

- Compact 1.57 x 4.33" PCB
- CISPR 22B; FCC B EMI
- +/-5% Voltage Adjustment
- Low 1 Inch Profile
- Optional 2 Wire AC Version

## Applications

- Networking
- Compact Equipment
- Peripherals and Terminals
- Microcomputers

## Safety Approvals

- cUL 1950
- CE (Low Voltage Directive)
- TUV EN60950

## Mechanical Characteristics

- Dimensions:
- Length: 110mm (4.33in)
  - Width: 40mm (1.57in)
  - Height: 25.4mm (1.00in)
  - Weight: 100gm (3.5oz)

## Output Specifications

Model (3 Wire Version) <sup>(2)</sup>	DC Output Voltage	Load		Ripple <sup>(1)</sup> P-P	Regulation		Max Power
		Min.	Max.		Line	Load	
PSA15LN2-033	3.3V	0A	3.0A	50mV	±1%	±3%	10W
PSA15LN2-050	5.0V	0A	3.0A	50mV	±1%	±2%	15W
PSA15LN2-090	9.0V	0A	1.67A	90mV	±1%	±2%	15W
PSA15LN2-120	12V	0A	1.25A	120mV	±1%	±2%	15W
PSA15LN2-150	15V	0A	1.00A	150mV	±1%	±2%	15W
PSA15LN2-180	18V	0A	0.83A	180mV	±1%	±2%	15W
PSA15LN2-240	24V	0A	0.63A	240mV	±1%	±2%	15W
PSA15LN3-033 <sup>(2)</sup>	3.3V	0A	3.0A	50mV	±1%	±3%	10W
PSA15LN3-050 <sup>(2)</sup>	5.0V	0A	3.0A	50mV	±1%	±2%	15W
PSA15LN3-090 <sup>(2)</sup>	9.0V	0A	1.67A	90mV	±1%	±2%	15W
PSA15LN3-120 <sup>(2)</sup>	12V	0A	1.25A	120mV	±1%	±2%	15W
PSA15LN3-150 <sup>(2)</sup>	15V	0A	1.00A	150mV	±1%	±2%	15W
PSA15LN3-180 <sup>(2)</sup>	18V	0A	0.83A	180mV	±1%	±2%	15W
PSA15LN3-240 <sup>(2)</sup>	24V	0A	0.63A	240mV	±1%	±2%	15W

(1) Measured at maximum load by using a 12 inch twisted pair terminated with a 10mfd capacitor and a 0.1mfd ceramic in parallel.

(2) PSA-15LN2 is two wire input. PSA-15LN2 is special order. Please consult factory. PSA-15LN3 is three wire input.

**INPUT:****AC Input Voltage (Operating)**

90 to 264 VAC

**AC Input Frequency**

47 to 63Hz

**AC Input Current**

0.5Arms (120VAC)

0.25Arms (240VAC)

**AC Inrush Current (Cold)**

30A max. (120VAC)

60A max. (240VAC)

**Efficiency**

65% minimum

Full Load, 115VAC

**OUTPUT:****Hold-up Time**

16ms, Full load, 115VAC

**Overvoltage Protection**

Zener Diode Clamping

**Overcurrent Protection**

Auto Restart

**ENVIRONMENTAL:****Operation Temperature (Convection)**

0 to 50°C

**Storage Temperature**

-25 to +85°C

**Humidity**

10 to 90% RH (Non-condensing)

**Emissions**

FCC Class B

EN 55022 B

**Immunity**

EN 50082-1: 1997

61000-4-2, Level 3

61000-4-3, Level 2

61000-4-4, Level 2

61000-4-5, Level 3

61000-4-6, Level 2

61000-4-11

**GENERAL:****Leakage Current (254VAC)**

LN2: Less than 0.25mA

LN3: Less than 0.75mA

**Dielectric Withstand (Hipot)**

Input to Output

3000VAC, 1 min., 10mA

**Switching Frequency**

100KHz (nominal)

**MTBF (Full Load, 25°C)**

150K Hrs.

MIL-HDBK-217F

**AC Input Connector (Molex or Equiv.)**

LN2: 09-65-2038 (Pin 2 omitted)

Mates with: 09-50-7031

LN3: 09-65-2058 (Pins 2,4 omitted)

Mates with: 09-50-7051

Crimp Pin: 08-52-0072


**DC Output Connector**

Molex 09-65-2028

Mates with: 09-50-7021


Crimp Pin: 08-52-0072

# PSA-15LN Dimension Diagram Unit: mm (inch)

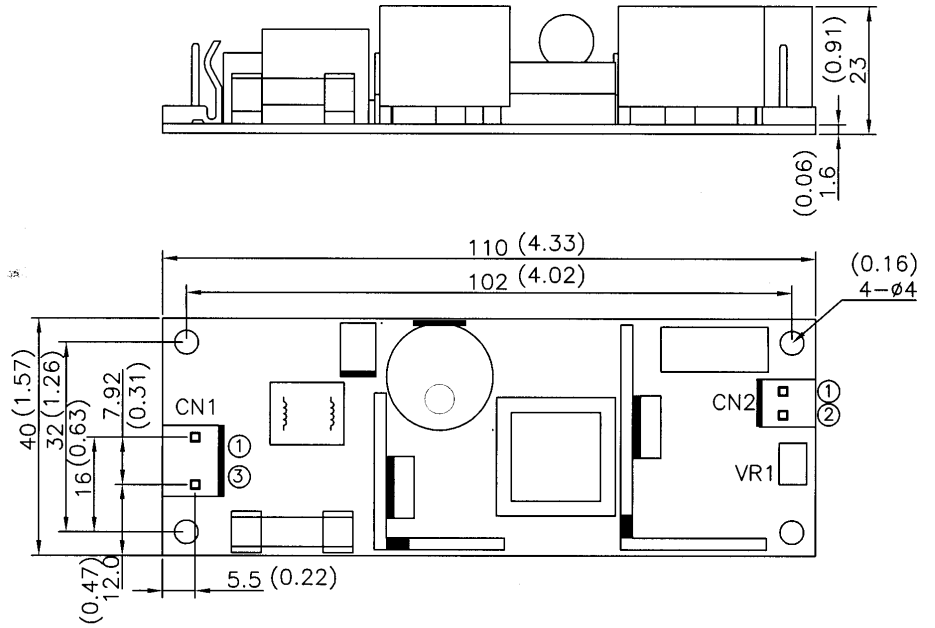

	PIN NO.	DESCRIPTION
CN2	PIN-1	+Vout
	PIN-2	RTN
CN1	PIN-1	AC N
	PIN-3	AC L

# PSA-15LN Dimension Diagram Unit: mm (inch)

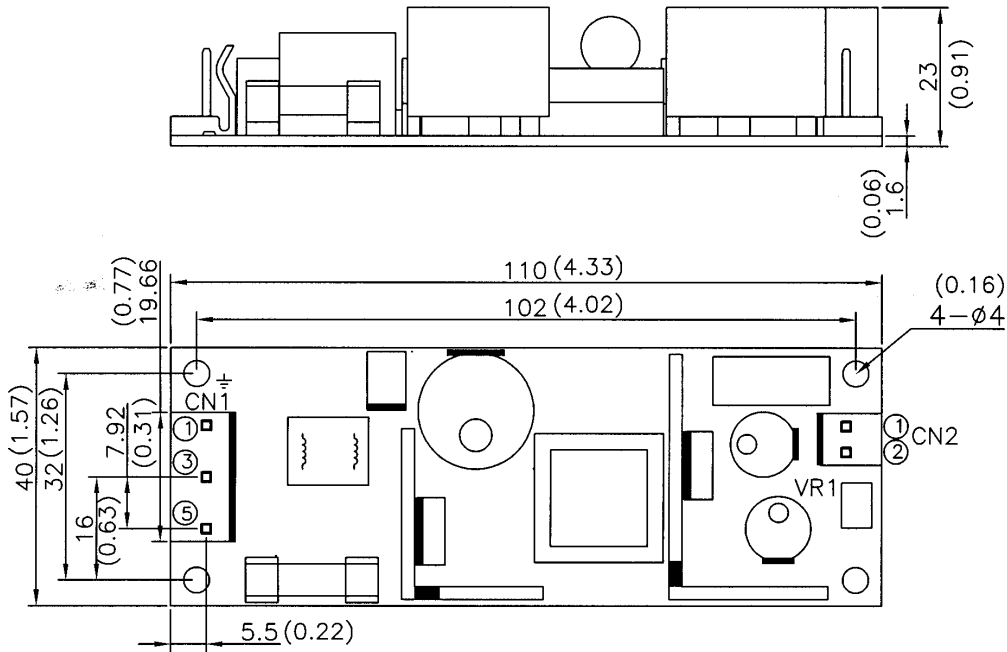

	PIN NO	DESCRIPTION
CN2	PIN-1	+Vout
	PIN-2	RTN
CN1	PIN-1	GROUND
	PIN-3	N
	PIN-5	L