

SEARCH OUR PRODUCTS

aluminum electrolytic & organic semiconductor



power film

tantalum ceramic

TECH TOOLS



NEW PRODUCTS

Aluminum Electrolytic Capacitors

+85°C Standard Axial Lead Aluminum Electrolytic Capacitors



Part Number: 478TTA016M

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)

Electrical Specifications

Capacitance: 4,700.0 uF
Tolerance: -20 %, +20 %
Dissipation Factor: 0.25 at 120 Hz
ESR: 0.088 Ohms at 20° C and 120 Hz
Impedance:
 - and -
 - and -

Temperature Range: -40°C to +85°C
WVDC: 16 volts DC
SVDC: 20. volts DC
Leakage Current:
 2,256.0 uA after 1 Minute
Ripple Current:
 2,060.0 mA at 120 Hz and 85°C

Impedance Ratios:

2.0 -25°C/20°C


6.0 -40°C/20°C

Load Life:

2000 Hours at 85°C with 100% of rated voltage and with 0% of rated ripple current

Physical Specifications

Diameter (D): 16.0 mm + 0.5 mm
Length (L): 31.5 mm + 1.0 mm
Lead Wire Diameter (d): 0.8 mm + 0.05 mm
Lead Length: 35mm

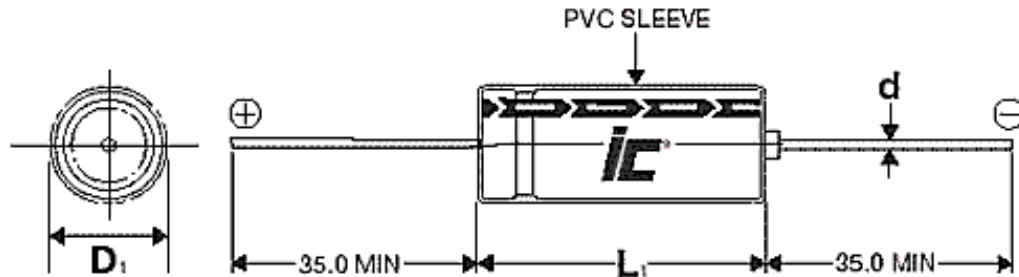

Add To Sample Cart
 (You can always remove it later)