






Dimensions: mm (In.)



101-0162



101-0262

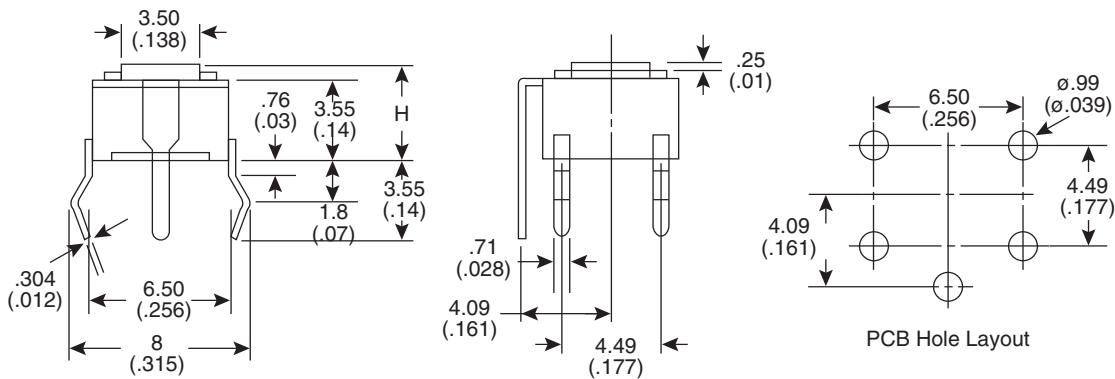

**Electrical Specifications:**

- Rating: 50mA/12VDC
- Insulation resistance: >100MΩ 250VDC
- Dielectric Strength: 250VAC 1 minute
- Contact resistance: <100mΩ
- Electrical life: 300,000 cycles

**Mechanical Specifications:**

- Temperature: -25°C ~ +70°C
- Operating force: 130 ±50gf
- Mechanical life: 500,000 cycles

**Material:**

- Contact: phosphor bronze plated silver

**Soldering Process:**

- Temperature: 255°C max. 5 sec.

**Note:**

- H: .169" (101-0162), .197" (101-0262)

Tactile Switches (Thru-Hole)  
101-0162, 101-0262

