



Dimensions: mm (in.)

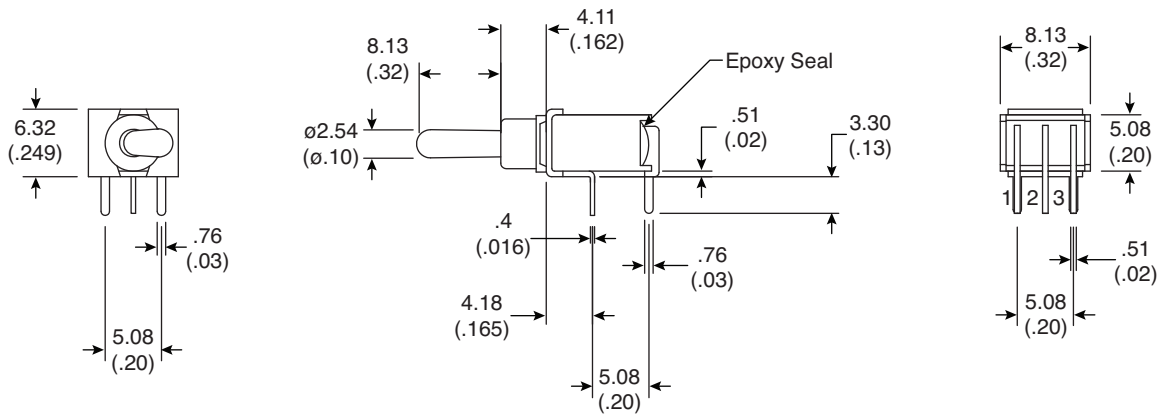

P.C. Mounting

POS. 1	POS. 2
ON	(ON)
2-3	2-1

Switch Function

Electrical Specifications:

- Contact resistance: 20m Ω max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000M Ω min.
- Dielectric strength: 1,000 V RMS@sea level
- Rating: 1A / 250VAC; 3A / 120VAC or 28VDC

Soldering Process:

- Manual Soldering: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder
- Wave Soldering: Recommended Soldering Temperature - 260 \pm 5°C
Duration of Solder Immersion - 5 \pm 1 seconds (PCB is 1.6mm in thickness)

Mechanical Specifications:

- Mechanical life: 50,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

Note:

- RoHS Compliant by Exemption

Sealed Sub-Miniature Toggle Switch
108-2AS2T3640-EVX

