



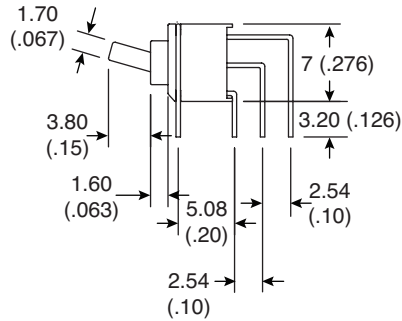


Dimensions: mm (In.)



P.C. Mounting

POS.1	POS.2	POS.3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4

Switch Function

**Electrical Specifications:**

- Contact resistance: Below 100mΩ typ. initial @ 2-4 V DC, 100mA
- Insulation resistance: 1,000MΩ min.
- Dielectric strength: 500 V RMS min. @sea level
- Rating: 0.4VA max. / 20VAC or DC max.

**Mechanical Specifications:**

- Mechanical life: 40,000 make-and-break cycles
- Operating temperature: -30°C ± 85°C

**Note:**

- RoHS Compliant

Sealed Ultra-Miniature Toggle Switch  
108-2UD3T1770-EV



Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.