

product specs: standard lithium cells



iXtra Series - Wafer Cells

Model Data Sheet	Cell Size Ref	Catalog No.	Nominal Voltage (V)	Nominal Capacity (Ah)	Nominal Discharge Current (mA)	Temperature range (°C)	Maximum Dimensions				Available Terminations
							Diameter		Height		
							(mm)	(in)	(mm)	(in)	
TL-2450	2450	15-2450-41000	3.6	0.55	0.5	-55° to 85°	24.5	0.947	6.2	0.244	P
TL-5934	1/10 D	15-5934-41500	3.6	1.00	1	-55° to 85°	32.9	1.295	6.5	0.256	P
TL-5935	1/6 D	15-5935-41500	3.6	1.70	1	-55° to 85°	32.9	1.295	10.2	0.401	P

NOTES:


Customized terminations are available upon request.

MODEL TL-2450

TECHNICAL DATA




(Typical values @+25°C for batteries stored for one year or less)

- Nominal capacity @ 0.5 mA, to 2V 0.55 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 5 mA
- Maximum pulse current capability 10 mA
- Weight 8.8g (0.310 oz)
- Volume 2.60 cc
- Operating temperature range -55°C to +85°C
- Li metal content approx. 0.2 g
- U.L. Component Recognition MH 12193

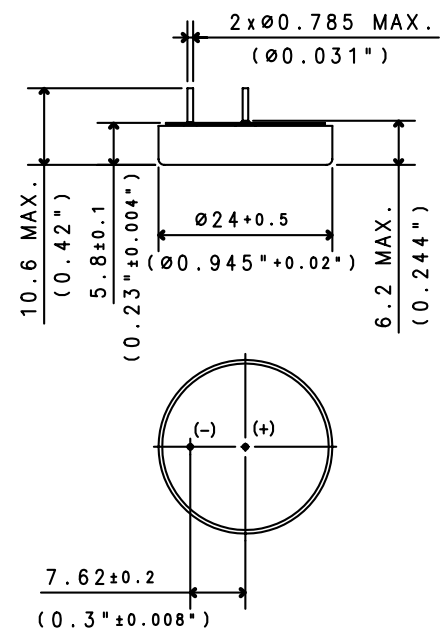

ADDITIONAL INFORMATION

SUFFIX - /P TIN PLATED NICKEL PINS
 CATALOGUE NO.: 15-2450-41000

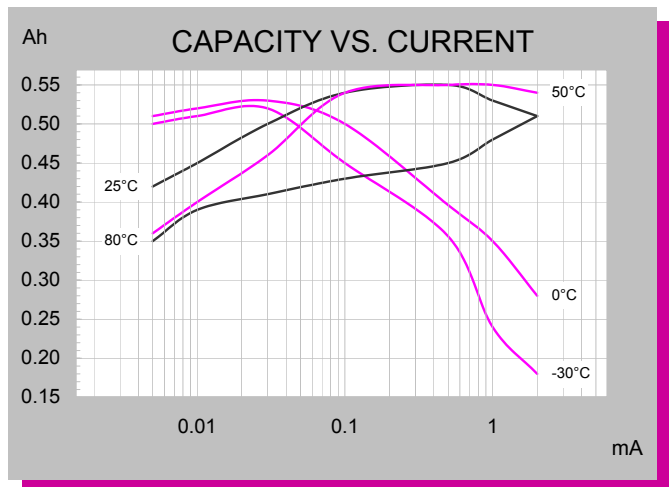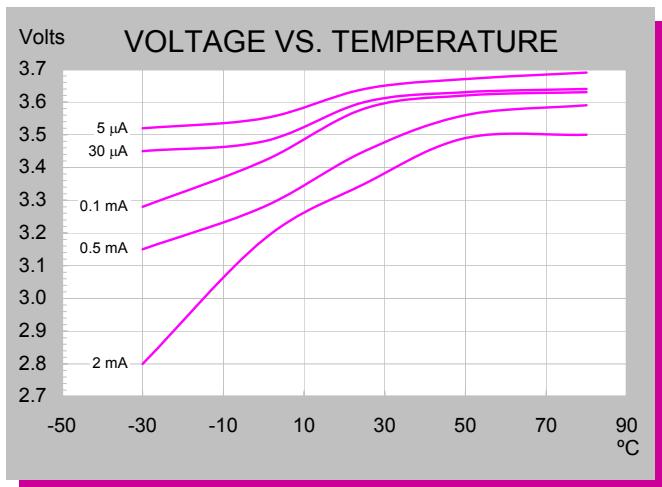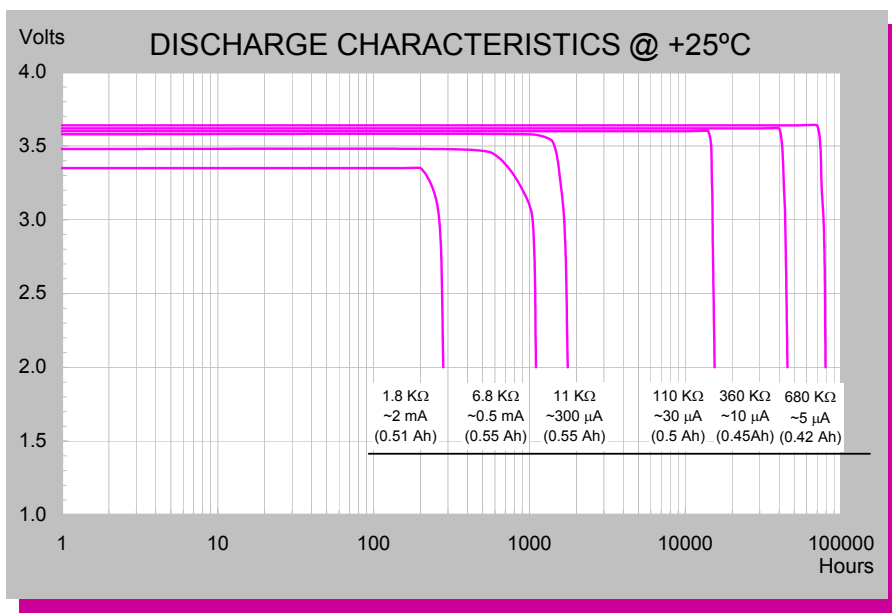

iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. ECN 1501879

TL-2450

CELL FEATURES

- 3.6 V Primary lithium-thionyl chloride (Li-SOCI₂)
- Fast voltage recovery after long term storage and/or usage
- High energy density
- High and stable operating voltage
- Low self discharge rate
- Wafer construction
- Hermetic glass-to-metal-sealing
- Non-flammable electrolyte




TADIRAN LITHIUM BATTERIES

MAIN APPLICATIONS

- Utility meters (elect., water & gas)
- Automatic meter reading
- RF systems
- Sensors & monitoring systems
- Tracking systems
- Wireless security systems
- Automotive electronics
- Industrial electronics
- Ultra Low Power (ULP)

STORAGE CONDITIONS

- Cells should be stored in a clean & dry (less than 30 % RH) area

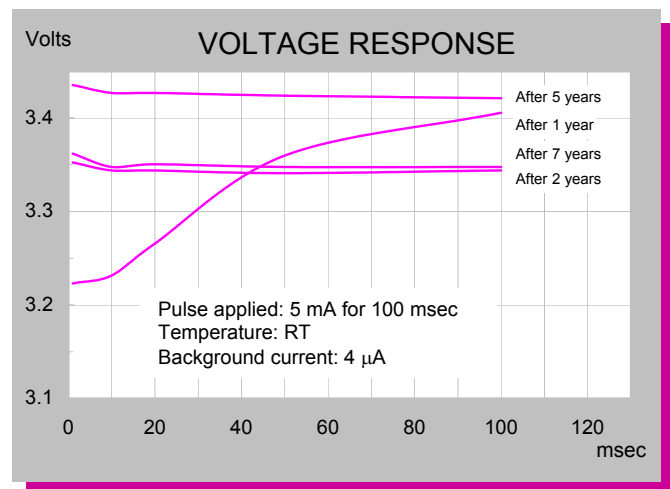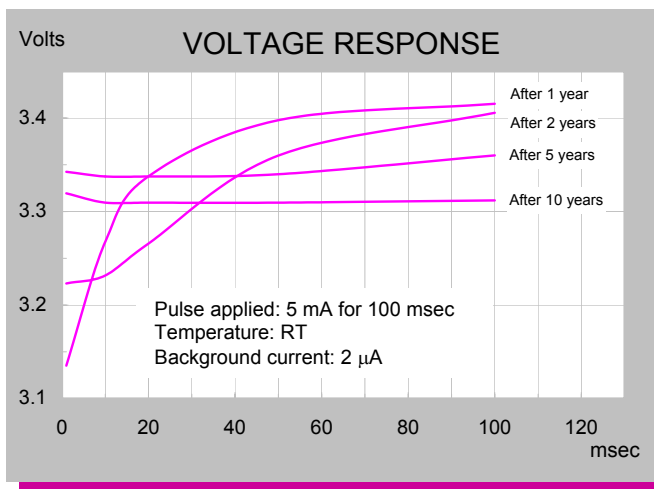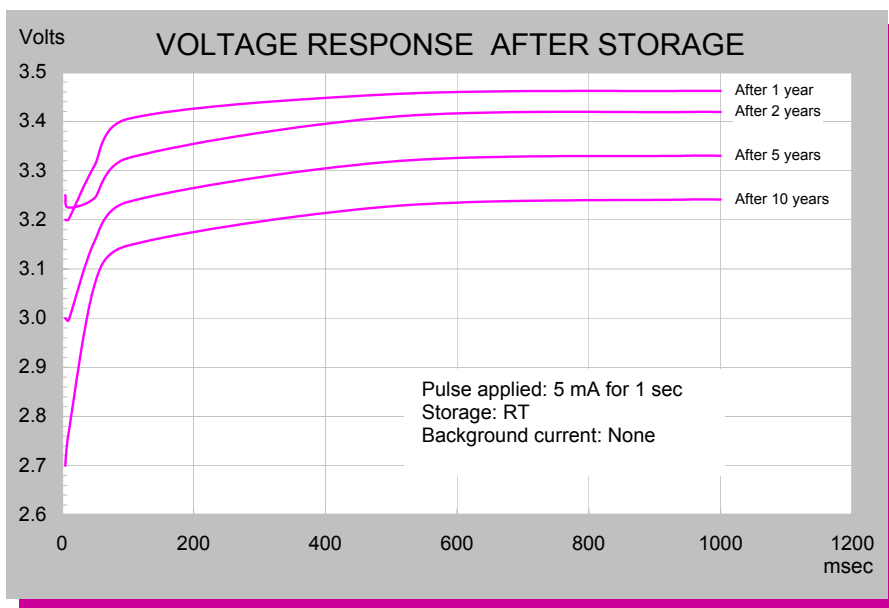

iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. ECN 1501879