RJHS Series <u>EMI Q</u>UIET - WITH LEDS

EMI Quiet Modular Jacks with LED's



is a family of EMI Quiet Modular Jack Connectors with built-in LEDs, meets Ethernet CAT 5 performance. This product is ideal for LAN applications such as adapter

cards and routers. Shielded and non-shielded versions are available, with a variety of LED colors, and ports.



RJ

Specifications

MATERIAL Shield: **Contacts:** Insert:

Copper Alloy; Tin/Lead Plated Phosphor Bronze; Gold over Nickel Solder reflow process compatible (Complies with UL 94V-0)

ELECTRICAL

Contact Resistance: Insulation Resistance: Current Rating: Voltage Rating: Dielectric Withstanding Voltage:

20 milliohms maximum 500 megohms minimum 1.5 Amps 125 Volts AC 1000 VAC, RMS. 60 Hz. 1 min.

Contact Amphenol Canada for more information

Standard LEDs: For 5.0 V Systems Forward Voltage: 2.1 Volts Typical **Reverse Voltage:** 6.0 Volts minimum Luminous Intensity: 0.5 mCd minimum (at If=2mA) Low Current LEDs: For 3.3 V Systems Forward Voltage: 2.0 Volts Typical **Reverse Voltage:** 6.0 Volts minimum Luminous Intensity: 1.0 mCd minimum (at If=2mA) **Other Parameters:** -20° C to 85° C Storage Temperature: Lead Soldering Temperature: 260° C (5 sec) Plating on Tails: Tin-Lead (90-10) alloy UL File # : E135615 CSA File # : LR68598

XX

Х

Ordering Information

	RJHS – X X	x x - xx	
x	VERSION 3 - vertical mount, RJ45, 8 contacts 5 - 8 position, RJ45, flat contact 7 - 6 position, RJ11, flat contact L - low profile, 8 position	NUMBER OF PORTS Blank - Single port 02 - 2 ports 03 - 3 ports 04 - 4 ports 05 - 5 ports	
X	SHIELDING OPTION 0 - no shield 3 - shielded 4 - one port shield similar to code 3 but with side ground tabs 7 - shield with ground lug (single port)	06 - 6 ports 07 - 7 ports 08 - 8 ports LED DESIGNATION 0 - blocked 1 - led 1 green, led 2 yellow	06 - 6 ports 07 - 7 ports 08 - 8 ports LED DESIGNATION 0 - blocked
x	NUMBER OF CONTACTS 4 - 4 contacts (6 position) 6 - 6 contacts (6 position) 8 - 8 contacts (8 position)	3 - led 2 yellow 4 - led 1 yellow, led 2 green 5 - led 1 green, led 2 green 6 - led 1 yellow, led 2 yellow A - led 1+ 2 - bi-colour yellow/g	
	Options for style, shield & contacts available.	For additional colour combinations	

nbinations refer to Chart RJHS Page 2

r yellow/green

RJHS Series RJ_{vista}^{*} EMI QUIET - WITH LEDS

LED Designation

RJHS	- 538 <u>1</u> * -08			
	* LED DESIGNATION CODE			
LED	LED 2	LED 1		
CODE	Left	Right		
0	Blocked	Blocked		
1	Yellow	Green		
2	Blocked	Green		
3	Yellow	Blocked		
4	Green	Yellow		
5	Green	Green		
6	Yellow	Yellow		
7	Red	Green		
8	Green	Red		
9	Green	Blocked		
А	BiC Gr/YI	BiC Gr/YI		
В	BiC Rd/Gr	BiC Rd/Gr		
С	BiC Rd/Gr	BiC Gr/YI		
D	Green	BiC Gr/Yl		
E	Yellow	BiC Gr/Yl		
F	BiC Gr/YI	Yellow		
G	BiC Gr/Or	BiC Gr/Or		
Н	BiC Gr/YI	Green		
J	BiC Rd/Gr	Yellow		
К	Yellow	BiC Gr/Or		
L	BiC Rd/Gr	Red		
М	Red	Yellow		
N	BiC Gr/Rd	BiC Gr/YI		
Р	Green	BiC Rd/Gr		
R	BiC Gr/Or	Green		
Т	Red	Red		
V	BiC Rd/Gr	Green		
W	Special Design (add digit to pa			
Z				

RJHS - 538W - 08 <u>2</u>*

* SPECIAL LED DESIGNATION

SPECIAL Designatio	LED 2 N Left	LED 1 Right		
0	See standard	See standard Design		
1	Red	Blocked		
2	BiC Gr/YI	Yellow		
3	Yellow	Red		
4	Blocked	Red		
5	Blocked	Yellow		
6	Red	BiC Gr/Yl		
7	1			
8				
9				
	LOW CURREN	LOW CURRENT LED OPTIONS		
А	Yellow	Yellow		
В	Yellow	Green		
С	Green	Yellow		
D	Green	Green		

LED 2


LED 1


* Contact Amphenol Canada for more information




Single Port

NON-SHIELDED






PCB LAYOUT




BI-COLOUR LEDS

GREEN 10 or - CH- 9 or 12 YELLOW	GREEN 10 or 12 ORANGE
RED	RED
10 or	10 or + + 9 or
12	12 + 11
GREEN	YELLOW


SHIELDED WITH TOP & SIDE GROUND TABS

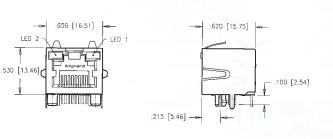


PCB LAYOUT




SHIELDED WITH GROUND LUG

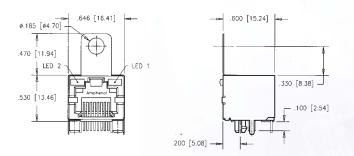


PCB LAYOUT




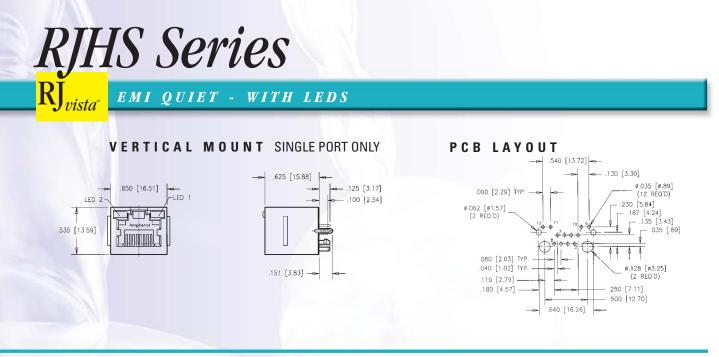


LOW PROFILE SINGLE & 2 PORT

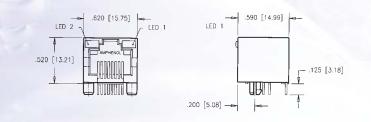


PCB LAYOUT




SHORTING BARS SINGLE & 2 PORT



PCB LAYOUT



SHORTING BARS (CIRCUIT)



ပ္ပံုပ္


RJHS Series


EMI Quiet Modular Jacks with LED's Multiport

RJ *vista*[™] is a family of EMI Quiet Modular Jack Connectors with built-in LEDs, designed for Category 5 ethernet performance. This product is ideal for LAN applications such as adapter cards and routers. Shielded and non-shielded versions are available, with a variety of LED colors, and ports.




SHIELDED 2 PORT



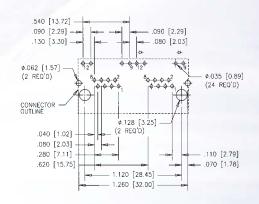


SHIELDED 3 PORT

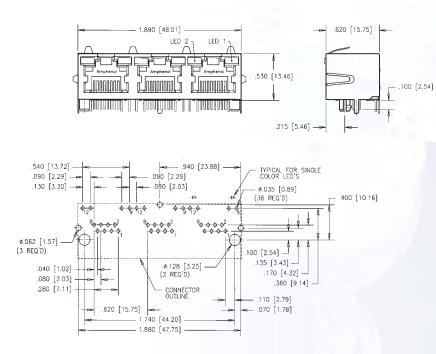

RJHS Series RJ_{vista} emi quiet - with leds



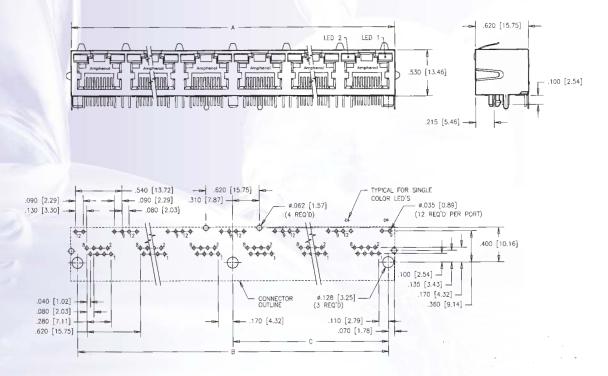

Number of ports	A	В	C
2	see page 5	see page 5	see page 5
3	see page 5	see page 5	see page 5
4	2.510[63.75]	2.360[59.94]	1.180[29.97]
6	3.750[95.25]	3.600[91.44]	1.800[45.72]
8	4.990[126.75]	4.840[122.94]	2.420[61.47]