• My Account

- ○ Sign In
- ○ Register

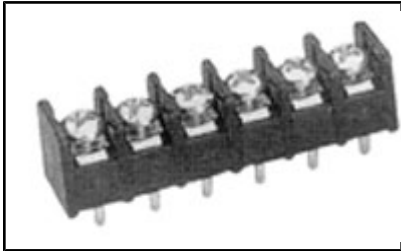## • Customer Support

- ○ Support
- ○ RoHS Support Center
- ○ Glossary of Terms
- ○ eBulletin Newsletter

Home > Products > By Type > Terminal Blocks & Strips > Product Feature Selector > Product Details

4DB-P108-04 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

4DB-P108-04
(2-1437667-6)

✔ Active

Barrier Strips, Barrier Strip Sockets

🍃 Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Barrier Strip
- Dual Barrier Block Series
- Base Style = Flat
- 8.26 mm Centerline
- Number of Levels = Single

View all Features | Find Similar Products

Quick Links

Documentation & Additional Information

Product Drawings:
- ASSEMBLY, DUAL BARRIER 4DB-P108-XX (PDF, English)

Catalog Pages/Data Sheets:
- TERMINAL BLOCKS (PDF, English)
- BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS (PDF, English)

Product Specifications:
- None Available

Application Specifications:
- None Available

Instruction Sheets:
- None Available

CAD Files: (CAD Format & Compression Information)
- 2D Drawing (DXF, Version L)
- 3D Model (IGES, Version L)
- 3D Model (STEP, Version L)

Additional Information:
- Product Line Information

Related Products:
- Tooling

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:
- Product Type = Barrier Strip
- Mount Angle = Vertical
- Mounting Ears = Without
- Number of Circuits = 4
- Screw Material = Steel
- UL Recognized = File No. E54800
- Comment = Do not order Screw and Captive Clamp in combination with other top hardware.

Mechanical Attachment:
- Mounting Style = Direct (All Positions Filled)
- Screw Plating = Zinc Chromate

Electrical Characteristics:
- Base Style = Flat
- Number of Levels = Single
- End Barriers = Without
- Mounting Insert = Without
- Top Hardware = Steel Clamp-plate Combo Head Screws
- Bracket = Without
- Screw Head Type = Phil-Slot

Termination Related Features:
- Terminal Plating = Bright Tin

Body Related Features:
- Block Series = Dual Barrier
- Centerline (mm [in]) = 8.26 [0.325]
- Number of Rows = 1
- Terminal Style = Printed Circuit Pin 4.00 [.160]
- CSA File No. = LR30811
- Terminal Material = Copper Alloy
- Wire Range (mm [AWG]) = 0.30-3.00² [22-12]

Industry Standards:
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:
- Brand = Buchanan