

SEARCH OUR PRODUCTS

aluminum electrolytic & organic semiconductor



power film

tantalum ceramic

TECH TOOLS

## Aluminum Electrolytic Capacitors

**+85°C Standard Axial Lead Aluminum Electrolytic Capacitors**



**Part Number: 478TTA035M**

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)

### Electrical Specifications

**Capacitance:** 4,700.0 uF  
**Tolerance:** -20 %, +20 %  
**Dissipation Factor:** 0.18 at 120 Hz  
**ESR:** 0.064 Ohms at 20° C and 120 Hz  
**Impedance:**

- and -  
 - and -

**Impedance Ratios:**

2.0 -25°C/20°C  
 3.0 -40°C/20°C

**Load Life:**

2000 Hours at 85°C with 100% of rated voltage and with 0% of rated ripple current

**Temperature Range:** -40°C to +85°C

**WVDC:** 35 volts DC


**SVDC:** 44. volts DC

**Leakage Current:**  
 4,935.0 uA after 1 Minute

**Ripple Current:**  
 2,470.0 mA at 120 Hz and 85°C

### Physical Specifications

**Diameter (D):** 22.0 mm + 1.0 mm  
**Length (L):** 40.0 mm + 2.0 mm  
**Lead Wire Diameter (d):** 0.8 mm + 0.05 mm  
**Lead Length:** 35mm

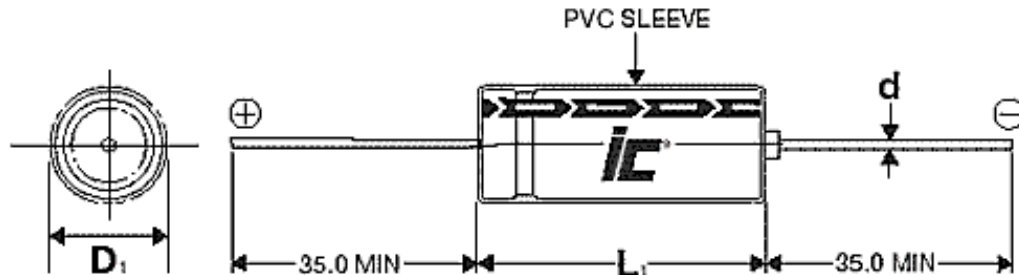

**Add To Sample Cart**  
 (You can always remove it later)