

## Metallized Polyester Film Capacitors, Wrap-and-Fill


**FEATURES**

- Economical
- Extensive standard ratings
- Rugged construction
- Small size
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

**PERFORMANCE CHARACTERISTICS**
**Operating Temperature:** - 55 °C to + 85 °C

**Capacitance Range:** 0.0047 μF to 10.0 μF

**Capacitance Tolerance:** ± 20 %, ± 10 %, ± 5 %

**DC Voltage Rating:** 50 WVDC to 600 WVDC

**Dissipation Factor:** 1.0 % maximum

**Voltage Test:** 200 % of rated voltage for 2 min

**Insulation Resistance:**

At + 25 °C: 25 000 MΩ/μF or 50 000 MΩ minimum

At + 85 °C: 1000 MΩ/μF or 2500 MΩ minimum

**Vibration Test (Condition B):**

No mechanical damage, short, open or intermittent circuits.

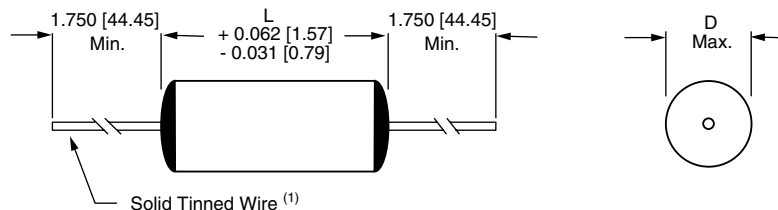
**DC Life Test:** 125 % of rated voltage for 250 h at + 85 °C. No open or short circuits. No visible damage. Maximum Δ CAP = ± 10 %  
 Minimum IR = 50 % of initial limit  
 Maximum DF = 1.25 %

**Humidity Test:** 95 % relative humidity at + 40 °C for 250 h. No visible damage. Maximum Δ CAP ± 10 %  
 Minimum IR = 20 % of initial limit  
 Maximum DF = 2.0 %

**PHYSICAL CHARACTERISTICS**
**Lead Pull:** 5 lb (2.3 kg) for one min. No physical damage.

**Lead Bend:** After three complete consecutive bends, no damage.

**Marking:** Sprague® trademark, type or part number, capacitance and voltage.

**DIMENSIONS** in inches (millimeters)

**Note**
<sup>(1)</sup> Lead size: D Max. < 0.270 [6.86] 0.025 [0.64] (No. 22 AWG). D Max ≥ 0.270 [6.86] 0.032 [0.81] (No. 20 AWG). Leads to be within ± 0.062" [1.57 mm] of center line at egress but not less than 0.031" [0.79 mm] from edge.

**STANDARD RATINGS** in inches [millimeters]

CAPACITANCE (μF)	PART NUMBER		CASE SIZE		LEAD AWG NO.
	± 10 % TOLERANCE	± 5 % TOLERANCE	D	L	
50 WVDC					
0.12	V-430P124X9050	V-430P124X5050	0.196 [4.98]	0.625 [15.88]	22
0.15	V-430P154X9050	V-430P154X5050	0.210 [5.33]	0.625 [15.88]	22
0.18	V-430P184X9050	V-430P184X5050	0.223 [5.66]	0.625 [15.88]	22
0.22	V-430P224X9050	V-430P224X5050	0.240 [6.10]	0.625 [15.88]	22
0.27	V-430P274X9050	V-430P274X5050	0.258 [6.55]	0.625 [15.88]	22
0.33	V-430P334X9050	V-430P334X5050	0.279 [7.09]	0.625 [15.88]	20
0.39	V-430P394X9050	V-430P394X5050	0.250 [6.35]	0.750 [19.05]	22
0.47	V-430P474X9050	V-430P474X5050	0.269 [6.83]	0.750 [19.05]	22
0.56	V-430P564X9050	V-430P564X5050	0.288 [7.32]	0.750 [19.05]	20
0.68	V-430P684X9050	V-430P684X5050	0.311 [7.90]	0.750 [19.05]	20
0.82	V-430P824X9050	V-430P824X5050	0.270 [6.86]	1.000 [25.40]	20



<b>STANDARD RATINGS</b> in inches [millimeters]						
CAPACITANCE ( $\mu$ F)	PART NUMBER		CASE SIZE		LEAD AWG NO.	
	$\pm$ 10 % TOLERANCE	$\pm$ 5 % TOLERANCE	D	L		
<b>50 WVDC</b>						
1.0	V-430P105X9050	V-430P105X5050	0.291 [7.39]	1.000 [25.40]	20	
1.5	V-430P155X9050	V-430P155X5050	0.344 [8.74]	1.000 [25.40]	20	
2.0	V-430P205X9050	V-430P205X5050	0.400 [10.16]	1.000 [25.40]	20	
2.5	V-430P255X9050	V-430P255X5050	0.438 [11.13]	1.000 [25.40]	20	
3.0	V-430P305X9050	V-430P305X5050	0.398 [10.11]	1.250 [31.75]	20	
4.0	V-430P405X9050	V-430P405X5050	0.434 [11.02]	1.500 [38.10]	20	
5.0	V-430P505X9050	V-430P505X5050	0.476 [12.09]	1.500 [38.10]	20	
6.0	V-430P605X9050	V-430P605X5050	0.515 [13.08]	1.500 [38.10]	20	
7.0	V-430P705X9050	V-430P705X5050	0.551 [14.00]	1.500 [38.10]	20	
10.0	V-430P106X9050	V-430P106X5050	0.647 [16.43]	1.500 [38.10]	20	
<b>100 WVDC</b>						
0.082	V-430P823X9100	V-430P823X5100	0.192 [4.88]	0.625 [15.88]	22	
0.1	V-430P104X9100	V-430P104X5100	0.204 [5.18]	0.625 [15.88]	22	
0.12	V-430P124X9100	V-430P124X5100	0.216 [5.49]	0.625 [15.88]	22	
0.15	V-430P154X9100	V-430P154X5100	0.233 [5.92]	0.625 [15.88]	22	
0.18	V-430P184X9100	V-430P184X5100	0.213 [5.41]	0.750 [19.05]	22	
0.22	V-430P224X9100	V-430P224X5100	0.228 [5.79]	0.750 [19.05]	22	
0.27	V-430P274X9100	V-430P274X5100	0.245 [6.22]	0.750 [19.05]	22	
0.33	V-430P334X9100	V-430P334X5100	0.264 [6.71]	0.750 [19.05]	22	
0.39	V-430P394X9100	V-430P394X5100	0.230 [5.84]	1.000 [25.40]	22	
0.47	V-430P474X9100	V-430P474X5100	0.246 [6.25]	1.000 [25.40]	22	
0.56	V-430P564X9100	V-430P564X5100	0.262 [6.65]	1.000 [25.40]	22	
0.68	V-430P684X9100	V-430P684X5100	0.283 [7.19]	1.000 [25.40]	20	
0.82	V-430P824X9100	V-430P824X5100	0.265 [6.73]	1.250 [31.75]	22	
1.0	V-430P105X9100	V-430P105X5100	0.286 [7.26]	1.250 [31.75]	20	
1.5	V-430P155X9100	V-430P155X5100	0.351 [8.92]	1.250 [31.75]	20	
2.0	V-430P205X9100	V-430P205X5100	0.393 [9.98]	1.250 [31.75]	20	
2.5	V-430P255X9100	V-430P255X5100	0.430 [10.92]	1.250 [31.75]	20	
3.0	V-430P305X9100	V-430P305X5100	0.464 [11.79]	1.250 [31.75]	20	
4.0	V-430P405X9100	V-430P405X5100	0.494 [12.55]	1.500 [38.10]	20	
5.0	V-430P505X9100	V-430P505X5100	0.544 [13.82]	1.500 [38.10]	20	
6.0	V-430P605X9100	V-430P605X5100	0.591 [15.01]	1.500 [38.10]	20	
7.0	V-430P705X9100	V-430P705X5100	0.633 [16.08]	1.500 [38.10]	20	
10.0	V-430P106X9100	V-430P106X5100	0.678 [17.22]	1.750 [44.45]	20	
<b>200 WVDC</b>						
0.047	V-430P473X9200	V-430P473X5200	0.200 [5.08]	0.625 [15.88]	22	
0.056	V-430P563X9200	V-430P563X5200	0.211 [5.36]	0.625 [15.88]	22	
0.068	V-430P683X9200	V-430P683X5200	0.225 [5.72]	0.625 [15.88]	22	
0.082	V-430P823X9200	V-430P823X5200	0.240 [6.10]	0.625 [15.88]	22	
0.10	V-430P104X9200	V-430P104X5200	0.221 [5.61]	0.750 [19.05]	22	
0.12	V-430P124X9200	V-430P124X5200	0.234 [5.94]	0.750 [19.05]	22	
0.15	V-430P154X9200	V-430P154X5200	0.254 [6.45]	0.750 [19.05]	22	
0.18	V-430P184X9200	V-430P184X5200	0.272 [6.91]	0.750 [19.05]	20	
0.22	V-430P224X9200	V-430P224X5200	0.295 [7.49]	0.750 [19.05]	20	
0.27	V-430P274X9200	V-430P274X5200	0.258 [6.55]	1.000 [25.40]	22	
0.33	V-430P334X9200	V-430P334X5200	0.279 [7.09]	1.000 [25.40]	20	
0.39	V-430P394X9200	V-430P394X5200	0.298 [7.57]	1.000 [25.40]	20	
0.47	V-430P474X9200	V-430P474X5200	0.321 [8.15]	1.000 [25.40]	20	
0.56	V-430P564X9200	V-430P564X5200	0.345 [8.76]	1.000 [25.40]	20	
0.68	V-430P684X9200	V-430P684X5200	0.375 [9.53]	1.000 [25.40]	20	
0.82	V-430P824X9200	V-430P824X5200	0.350 [8.89]	1.250 [31.75]	20	
1.0	V-430P105X9200	V-430P105X5200	0.380 [9.65]	1.250 [31.75]	20	
1.5	V-430P155X9200	V-430P155X5200	0.454 [11.53]	1.250 [31.75]	20	
2.0	V-430P205X9200	V-430P205X5200	0.469 [11.91]	1.500 [38.10]	20	
2.5	V-430P255X9200	V-430P255X5200	0.516 [13.11]	1.500 [38.10]	20	
3.0	V-430P305X9200	V-430P305X5200	0.559 [14.20]	1.500 [38.10]	20	
4.0	V-430P405X9200	V-430P405X5200	0.580 [14.73]	1.750 [44.45]	20	
5.0	V-430P505X9200	V-430P505X5200	0.641 [16.28]	1.750 [44.45]	20	

**Note**

• Other capacitance values and voltage ratings are available upon request



STANDARD RATINGS in inches [millimeters]						
CAPACITANCE ( $\mu$ F)	PART NUMBER		CASE SIZE		LEAD AWG NO.	
	$\pm 10\%$ TOLERANCE	$\pm 5\%$ TOLERANCE	D	L		
<b>400 WVDC</b>						
0.015	V-430P153X9400	V-430P153X5400	0.186 [4.72]	0.625 [15.88]	22	
0.018	V-430P183X9400	V-430P183X5400	0.197 [5.00]	0.625 [15.88]	22	
0.022	V-430P223X9400	V-430P223X5400	0.210 [5.33]	0.625 [15.88]	22	
0.027	V-430P273X9400	V-430P273X5400	0.224 [5.69]	0.625 [15.88]	22	
0.033	V-430P333X9400	V-430P333X5400	0.241 [6.12]	0.625 [15.88]	22	
0.039	V-430P393X9400	V-430P393X5400	0.256 [6.50]	0.625 [15.88]	22	
0.047	V-430P473X9400	V-430P473X5400	0.275 [6.99]	0.625 [15.88]	20	
0.056	V-430P563X9400	V-430P563X5400	0.248 [6.30]	0.750 [19.05]	22	
0.068	V-430P683X9400	V-430P683X5400	0.266 [6.76]	0.750 [19.05]	22	
0.082	V-430P823X9400	V-430P823X5400	0.286 [7.26]	0.750 [19.05]	20	
0.10	V-430P104X9400	V-430P104X5400	0.310 [7.87]	0.750 [19.05]	20	
0.12	V-430P124X9400	V-430P124X5400	0.268 [6.81]	1.000 [25.40]	22	
0.15	V-430P154X9400	V-430P154X5400	0.293 [7.44]	1.000 [25.40]	20	
0.18	V-430P184X9400	V-430P184X5400	0.315 [8.00]	1.000 [25.40]	20	
0.22	V-430P224X9400	V-430P224X5400	0.342 [8.69]	1.000 [25.40]	20	
0.27	V-430P274X9400	V-430P274X5400	0.322 [8.18]	1.250 [31.75]	20	
0.33	V-430P334X9400	V-430P334X5400	0.350 [8.89]	1.250 [31.75]	20	
0.39	V-430P394X9400	V-430P394X5400	0.337 [8.56]	1.500 [38.10]	20	
0.47	V-430P474X9400	V-430P474X5400	0.364 [9.25]	1.500 [38.10]	20	
0.56	V-430P564X9400	V-430P564X5400	0.393 [9.98]	1.500 [38.10]	20	
0.68	V-430P684X9400	V-430P684X5400	0.402 [10.21]	1.750 [44.45]	20	
0.82	V-430P824X9400	V-430P824X5400	0.434 [11.02]	1.750 [44.45]	20	
1.0	V-430P105X9400	V-430P105X5400	0.472 [11.99]	1.750 [44.45]	20	
1.5	V-430P155X9400	V-430P155X5400	0.563 [14.30]	1.750 [44.45]	20	
2.0	V-430P205X9400	V-430P205X5400	0.640 [16.26]	1.750 [44.45]	20	
<b>600 WVDC</b>						
0.0047	V-430P472X9600	V-430P472X5600	0.187 [4.75]	0.625 [15.88]	22	
0.0056	V-430P562X9600	V-430P562X5600	0.197 [5.00]	0.625 [15.88]	22	
0.0068	V-430P682X9600	V-430P682X5600	0.209 [5.31]	0.625 [15.88]	22	
0.0082	V-430P822X9600	V-430P822X5600	0.223 [5.66]	0.625 [15.88]	22	
0.01	V-430P103X9600	V-430P103X5600	0.239 [6.07]	0.625 [15.88]	22	
0.012	V-430P123X9600	V-430P123X5600	0.255 [6.48]	0.625 [15.88]	22	
0.015	V-430P153X9600	V-430P153X5600	0.224 [5.69]	0.750 [19.05]	22	
0.018	V-430P183X9600	V-430P183X5600	0.239 [6.07]	0.750 [19.05]	22	
0.022	V-430P223X9600	V-430P223X5600	0.257 [6.53]	0.750 [19.05]	22	
0.027	V-430P273X9600	V-430P273X5600	0.278 [7.06]	0.750 [19.05]	20	
0.033	V-430P333X9600	V-430P333X5600	0.300 [7.62]	0.750 [19.05]	20	
0.039	V-430P393X9600	V-430P393X5600	0.251 [6.38]	1.000 [25.40]	22	
0.047	V-430P473X9600	V-430P473X5600	0.269 [6.83]	1.000 [25.40]	22	
0.056	V-430P563X9600	V-430P563X5600	0.288 [7.32]	1.000 [25.40]	20	
0.068	V-430P683X9600	V-430P683X5600	0.311 [7.90]	1.000 [25.40]	20	
0.082	V-430P823X9600	V-430P823X5600	0.336 [8.53]	1.000 [25.40]	20	
0.10	V-430P104X9600	V-430P104X5600	0.365 [9.27]	1.000 [25.40]	20	
0.12	V-430P124X9600	V-430P124X5600	0.335 [8.51]	1.250 [31.75]	20	
0.15	V-430P154X9600	V-430P154X5600	0.368 [9.35]	1.250 [31.75]	20	
0.18	V-430P184X9600	V-430P184X5600	0.354 [8.99]	1.500 [38.10]	20	
0.22	V-430P224X9600	V-430P224X5600	0.385 [9.78]	1.500 [38.10]	20	
0.27	V-430P274X9600	V-430P274X5600	0.421 [10.69]	1.500 [38.10]	20	
0.33	V-430P334X9600	V-430P334X5600	0.428 [10.87]	1.750 [44.45]	20	
0.39	V-430P394X9600	V-430P394X5600	0.459 [11.66]	1.750 [44.45]	20	
0.47	V-430P474X9600	V-430P474X5600	0.497 [12.62]	1.750 [44.45]	20	
0.56	V-430P564X9600	V-430P564X5600	0.537 [13.64]	1.750 [44.45]	20	
0.68	V-430P684X9600	V-430P684X5600	0.585 [14.86]	1.750 [44.45]	20	

**Note**

• Other capacitance values and voltage ratings are available upon request

ORDERING INFORMATION			
<b>V-430P</b>	<b>124</b>	<b>X9</b>	<b>050</b>
TYPE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING
	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow. Values must conform to the decade rating for the tolerance specified.	X0 = $\pm 20\%$ X9 = $\pm 10\%$ X5 = $\pm 5\%$	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.