


# Type N Panel Mount - 4 Hole Flange

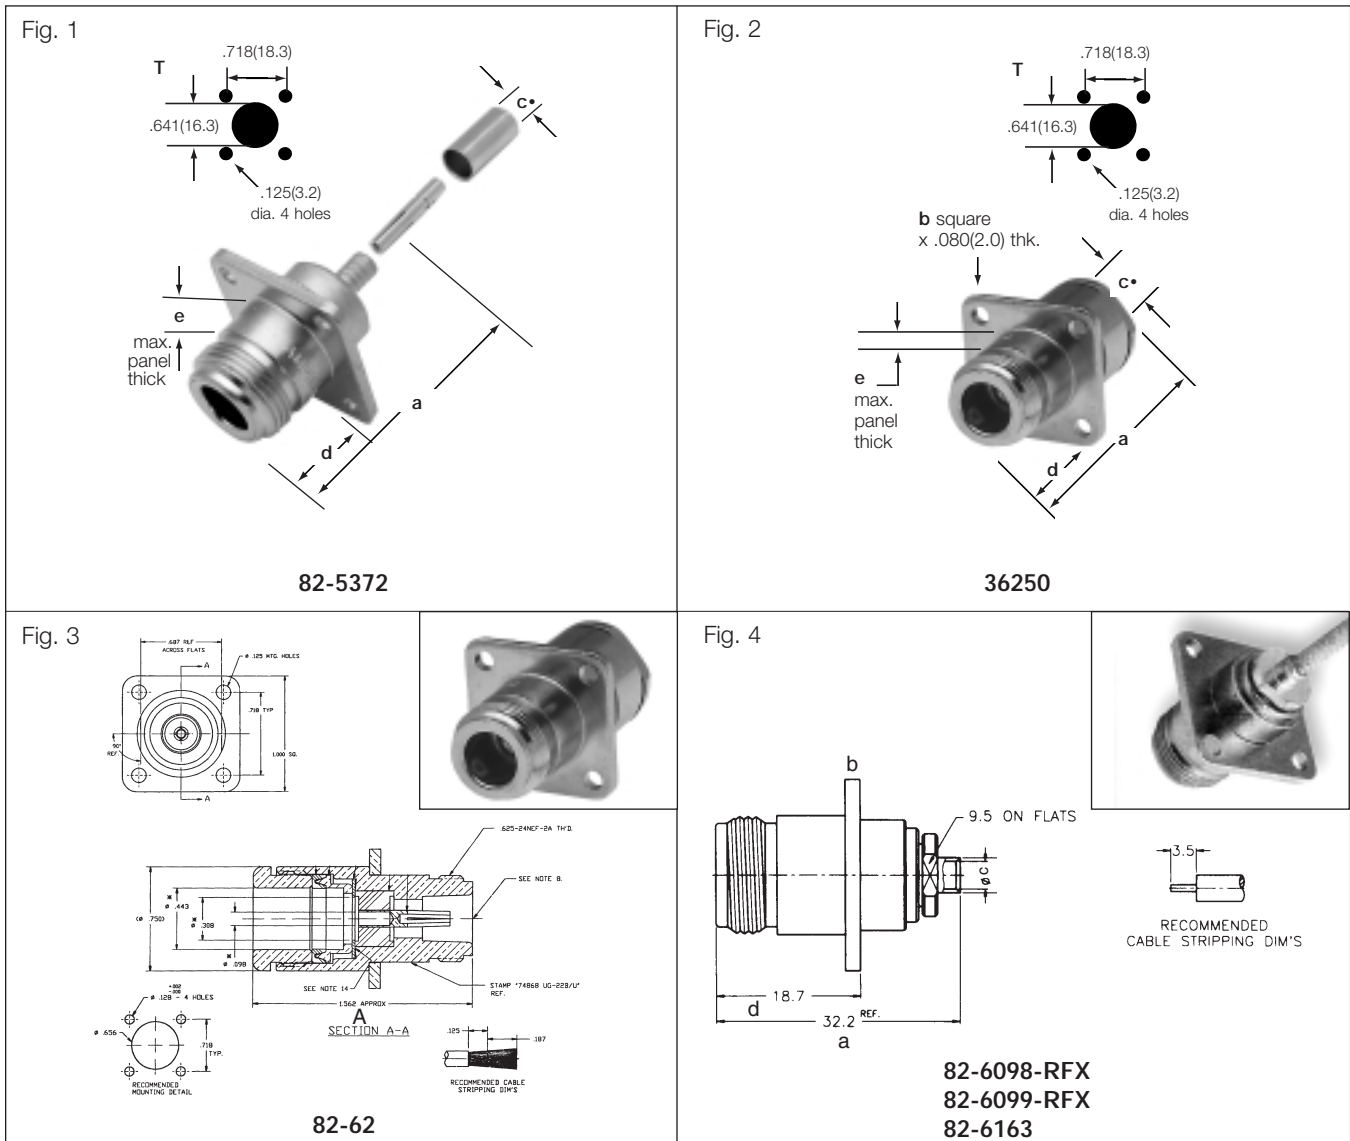

## N PANEL JACKS

| Cable RG-/U                               | Conn. Type | Cable Attachment Outer | Cable Attachment Inner | Dimensions, inches (millimeters) |            |            |            |            | Notes |      |      | Mtg Hole | Military Number | Amphenol Number | Fig |
|---|------------|------------------------|------------------------|----------------------------------|------------|------------|------------|------------|-------|------|------|----------|-----------------|-----------------|-----|
|   |            |                        |                        | a                                | b          | c •        | d          | e          | CAI   | Plt. | Ins. |          |                 |                 |     |
| 55, 141, 142                              | Panel      | Crimp                  | Crimp                  | 1.56(39.7)                       | 1.00(25.4) | .220(5.6)  | .576(14.6) | .125(3.2)▼ | C11   | P15  | D1   | T        | —               | 82-5372         | 2   |
| 55, 58, 141,                              | Panel      | Clamp                  | Solder                 | 1.50(38.1)                       | 1.00(25.4) | .224(5.7)  | .656(16.7) | .219(5.6)▼ | C8    | P1   | D1   | T        | UG-1095A/U      | 36250           | 1   |
| 8, 9, 87A,<br>144,165,213,<br>214,216,225 | Panel      | Clamp                  | Solder                 | 1.56(39.7)                       | 1.00(25.4) | .440(11.2) | —          | —          | C8    | P1   | D1   | —        | UG-23B/U        | 82-62           | 3   |
| 405 (.085) S/R                            | Panel      | Solder                 | Solder                 | 1.26(32.2)                       | 1.00(25.4) | .086(2.2)  | .736(18.7) | —          | C9    | P7   | D1   | T        | —               | 82-6098-RFX     | 4   |
| 402 (.141) S/R                            | Panel      | Solder                 | Solder                 | 1.26(32.2)                       | 1.00(25.4) | .141(3.6)  | .736(18.7) | —          | C9    | P7   | D1   | T        | —               | 82-6099-RFX     | 4   |
| 401 (.250) S/R                            | Panel      | Solder                 | Solder                 | 1.26(32.2)                       | 1.00(25.4) | .250(6.35) | .736(18.7) | —          | C9    | P7   | D1   | T        | —               | 82-6163         | 4   |