


Dimensions: mm (In.)

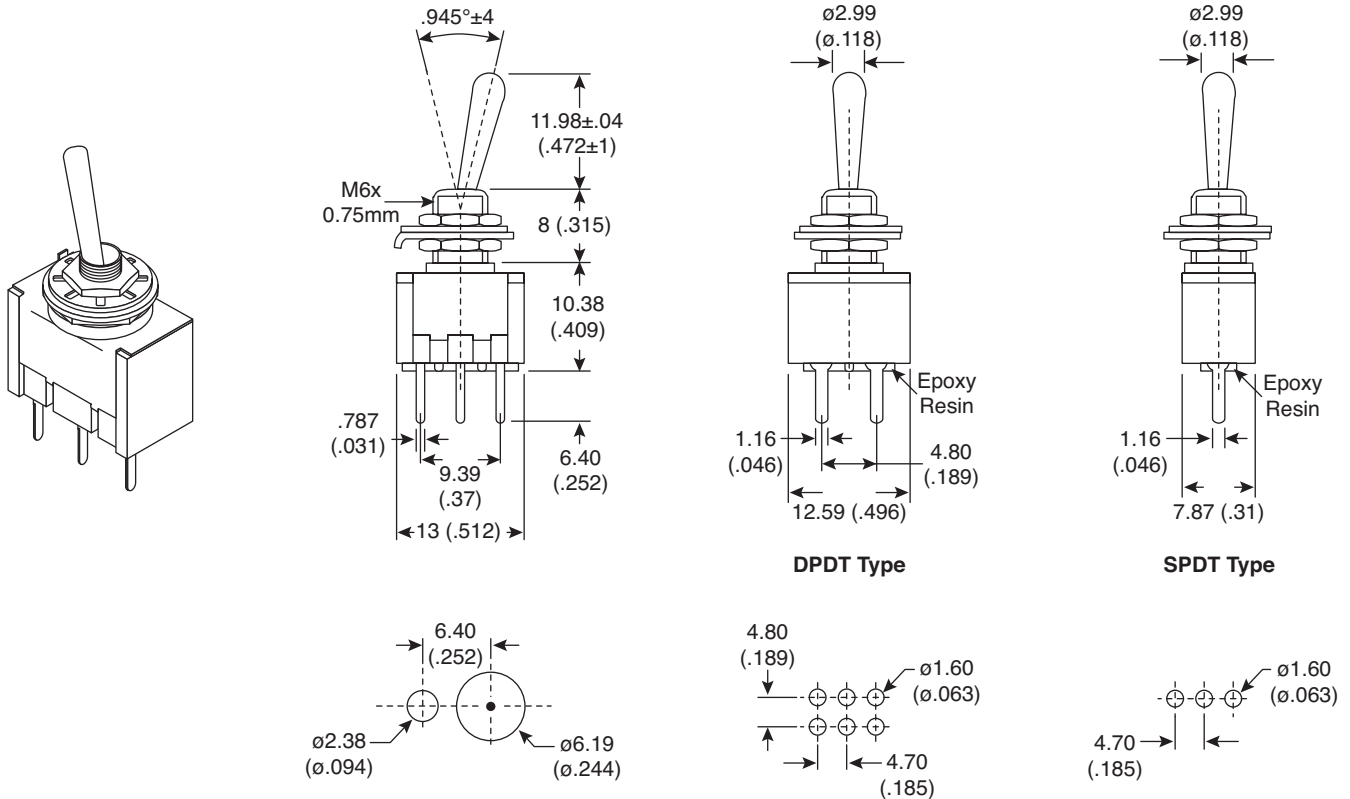

**Electrical Specifications:**

- Dielectric strength: 1000VAC for 1 minute (terminal-terminal); 1500VAC for 1 minute (terminal-earth)
- Electrical life: >50,000 cycles
- Insulation resistance: 1000M $\Omega$  (min.)
- Contact resistance: 20m $\Omega$  @ 1mA/0.1VAC

**Mechanical Specifications:**

- Mechanical life: 100,000 cycles

**Materials:**

- Gold plated contacts and terminals

Mouser Stock No.	Type	Circuit
108-MS510A	SPDT	ON-ON
108-MS510C	SPDT	ON-OFF-ON
108-MS510F	DPDT	ON-ON
108-MS510H	DPDT	ON-OFF-ON

**Toggle Switches**

108-MS510F, 108-MS510A  
108-MS510C, 108-MS510H

