

SEARCH OUR PRODUCTS



Aluminum Electrolytic Capacitors

+85°C Standard Axial Lead Aluminum Electrolytic Capacitors



Part Number: 108TTA016M

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)


Electrical Specifications

Capacitance: 1,000.0 uF
Tolerance: -20 %, +20 %
Dissipation Factor: 0.17 at 120 Hz
ESR: 0.282 Ohms at 20° C and 120 Hz
Impedance:
 - and -
 - and -
Impedance Ratios:
 2.0 -25°C/20°C
 6.0 -40°C/20°C
Load Life:
 2000 Hours at 85°C with 100% of rated voltage and with 0% of rated ripple current

Temperature Range: -40°C to +85°C
WVDC: 16 volts DC
SVDC: 20. volts DC
Leakage Current:
 480.0 uA after 1 Minute
Ripple Current:
 785.0 mA at 120 Hz and 85°C

Physical Specifications

Diameter (D): 10.0 mm + 0.5 mm
Length (L): 25.0 mm + 1.0 mm
Lead Wire Diameter (d): 0.6 mm + 0.05 mm
Lead Length: 35mm

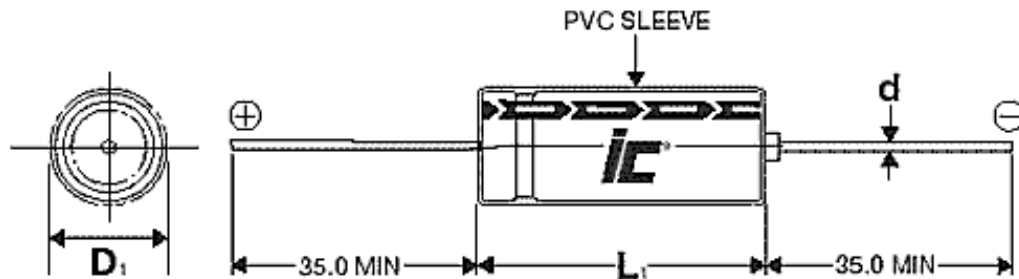

Add To Sample Cart
 (You can always remove it later)

TECH TOOLS

power film

tantalum

ceramic