

SEARCH OUR PRODUCTS


aluminum electrolytic & organic semiconductor


film


power film

 
tantalum ceramic

TECH TOOLS



Aluminum Electrolytic Capacitors

+85°C Standard Axial Lead Aluminum Electrolytic Capacitors



Part Number: 475TTA350M

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)

Electrical Specifications

Capacitance: 4.7 μ F

Tolerance: -20 %, +20 %

Dissipation Factor: 0.2 at 120 Hz

ESR: 70.547 Ohms at 20° C and 120 Hz

Impedance:

- and -

- and -

Impedance Ratios:

3.0 -25°C/20°C

6.0 -40°C/20°C

Load Life:

2000 Hours at 85°C with 100% of rated voltage and with 0% of rated ripple current

Temperature Range: -40°C to +85°C

WVDC: 350 volts DC

SVDC: 400. volts DC

Leakage Current:

166.0 μ A after 1 Minute

Ripple Current:

50.0 mA at 120 Hz and 85°C


Physical Specifications

Diameter (D): 8.0 mm + 0.5 mm

Length (L): 20.0 mm + 2.0 mm

Lead Wire Diameter (d): 0.6 mm + 0.05 mm

Lead Length: 35mm

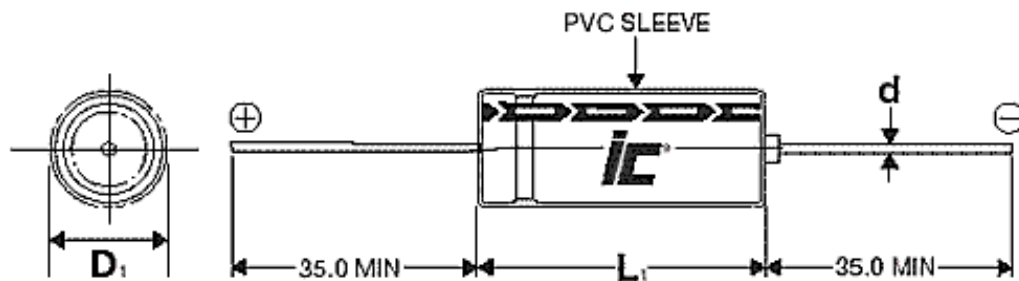

 **Add To Sample Cart**
(You can always remove it later)