

HBL7596N -- Twist-Lock Flanged Receptacle



2P3W, 15A 125V, ML-2R, Black Nylon

HBL7596N

Product Specifications


Product Type



Twist-Lock
Devices

Product Item	Flanged Receptacle
Wiring Scheme	2 Pole, 3 Wire Grounding
Amperage	15A
Voltage	125V AC
NEMA Configuration	ML-2R
Item Style	Standard
Device Color	Black
Terminal Screw Material	#5-40 Brass
Ground Screw Material	Brass (green finish)
Contact Spring Material	.032" (.8) Bronze
Flanged Casing Material	Black Nylon
Mounting Screw Material	Nickel-plated Brass Round head screws
Ground Contact Material	.032" Bronze

Ratings	Molded into face.
Dielectric Voltage Withstand	2,000V minimum
Current Interrupting	Certified for current interrupting at full rated current.
Temperature Rise	Max 30C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75.
Terminal Accommodation	15A #14AWG
Terminal Identification	Terminals identified in accordance with UL 498 (X, Y, Z, White, Green)
Flammability	UL 94 VO for Receptacles and Inlets. HB or better for Plugs and Connectors.
Operating Temperatures	Maximum Continuous 75 C Minimum -40 C (w/o impact)
Listings	UL/CSA
Catalog Page	Click here for catalog page B6
Brochures	Click here for product brochure
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-B
UPC Number	78358523782
Weight in LBs	0.1




TWIST-LOCK® Devices


2 Pole, 3 Wire Grounding

15 Ampere, 125 Volts


Midget TWIST-LOCK® Devices



HBL7596N




HBL7596



HBL7598




HBL7594V

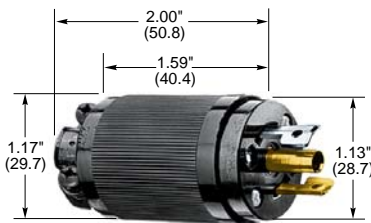

HBL7594



HBL7570



Flanged Receptacles

Description	Catalog Numbers
Exposed terminals, black nylon flange.	HBL7596N -
Exposed terminals, stainless steel flange.	HBL7596 -
Covered terminals, stainless steel flange, accepts cord .500" (12.7) in dia.	HBL7598 -

Male Plugs IP20 SUITABILITY

Description	Cord Dia.	Catalog Numbers
Valise® male plug, black nylon, insulation displacement terminals.	.300"- .430" (7.6-10.9)	- HBL7594V
Black nylon cover, phenolic body, multiple drive screw terminals.	.281"- .421" (7.1-10.7)	- HBL7594
Angle plug, black nylon cover, phenolic body, multiple drive screw terminals.	.335"- .421" (8.5-10.7)	- HBL7570

Weatherproof Accessory IP55** SUITABILITY

Description	Catalog Number
Seal-Tite® cover, black elastomer, for use with a HBL7594V plug when used with a HBL7593V connector body or a HBL7593V connector body when used with a flanged inlet.	HBL7495V** *

*Notes: These devices are not interchangeable with any other devices in this catalog. All male ground pins are sleeves and female device grounds are split pin. **IP55 Suitability when installed and used properly with plug and connector body combination. * Not UL Listed.*



HBL7495V