

Cooper Bussmann

- Homepage
- About Cooper Bussmann
- Contact Us
- Privacy
- Legal
- Cooper Bussmann® Brand
- Site Map



BAF-1/2

Fast-Acting Supplementary Fuses, 13/32 x 1-1/2 Inches

Product Information

Product Type:	Fuse
Product Family:	Electrical Power
Upgrade Product:	LP-CC-1/2

Recommended Products

Rec. Fuse Block:	BM603 Series
Rec. Inline Fuse Holder:	HPS
Rec. Panel-mount Fuse Holder:	HEB Series
Rec. Modular Fuse Holder:	OPM-NG-SM3
Rec. Fuse Clips:	5960 Series
Rec. Cover:	SAMI-7 Series

Physical Properties

Dimensions:	1.5in.(L) × 0.41in.(W) × 0in.(H)
-------------	----------------------------------

Certifications

- [UL Listed](#)
- [CSA Certified](#)

Electrical Properties

Maximum AC Voltage:	250
Amperage Rating:	0.5
AC Interrupting Ratings:	<ul style="list-style-type: none"> • 10000 at 125V • 35 at 250V
Fast Acting:	Yes


Fast-Acting Ferrule Fuses

13/32" x 1-1/2" Midget

2/10-30 Amps



Dimensional Data

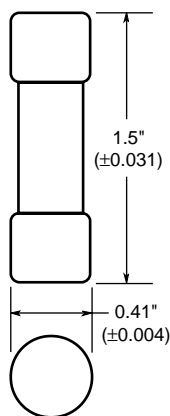

Catalog Symbol: BAF (5AG)

Fast-Acting

2/10 TO 30

UL Recognized, STD. 248-14

0-15/250Vac

(GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED

0-15/250Vac

(CLASS 1422-01, FILE # 53787)

- Fibre tube.
- Nickel plated brass endcaps.

Electrical Ratings (Catalog Symbol and Amperes)

250Vac IR*	250Vac IR*	250Vac IR*	125Vac
BAF-2/10	BAF-1-1/2	BAF-6-1/4	BAF-20
BAF-1/4	BAF-1-8/10	BAF-7	BAF-25
BAF-1/2	BAF-2	BAF-8	BAF-30
BAF-6/10	BAF-2-1/2	BAF-9	—
BAF-8/10	BAF-3	BAF-10	—
BAF-1	BAF-4	BAF-12	—
—	BAF-5	BAF-15	—
—	BAF-6	—	—


*All have interrupting rating of 10,000A at 125V.


DC ratings: 3-6A, 150Vdc; 6-1/4-15A, 12Vdc; 10 KAIC.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight Lbs.	Kg.
2/10-30	100	1.3	0.590

Time-Current Characteristic Curves—Average Melt

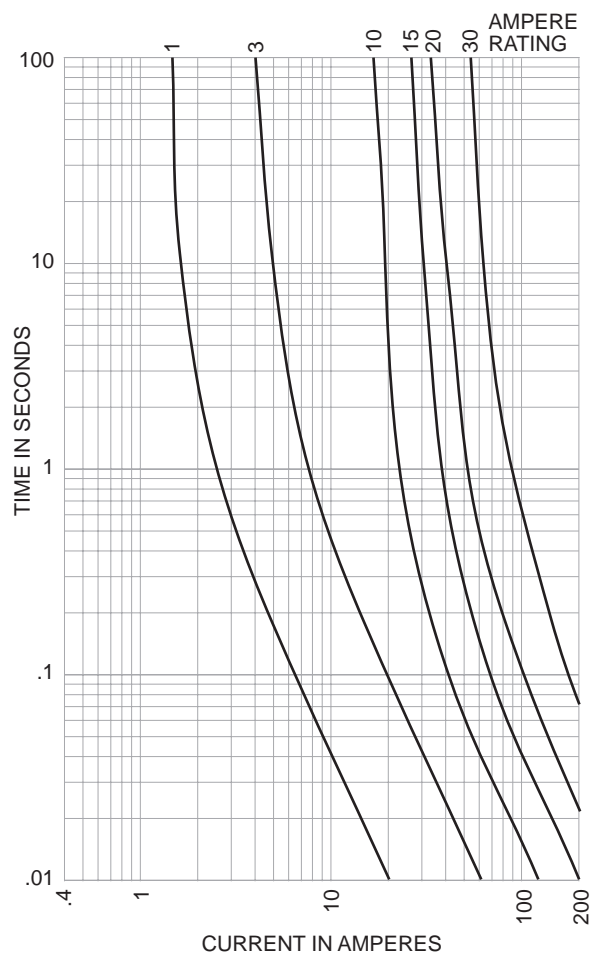



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

CE