



# KXTH5 Series

## Accelerometers and Inclinometers

### FEATURES

- Very Small Package - 3x5x0.9mm LGA
- Low Power Consumption
- Multiplexed Analog Output
- Factory-programmable Internal Low Pass Filter
- Ultra-low Noise Density
- Lead-free Solderability
- Excellent Temperature Performance
- High Shock Survivability
- Factory-programmable Offset and Sensitivity
- Auxiliary Input to Multiplexer
- Self-test Function

### PROPRIETARY TECHNOLOGY

The **KXTH5** series is designed to provide a high signal-to-noise ratio with excellent performance over temperature. These sensors can accept supply voltages between 1.8V and 3.6V. Sensitivity is factory programmable allowing customization for applications requiring from 1.5g to 6.0g ranges. Sensor bandwidth is user-definable. The auxiliary input to the multiplexer minimizes the need for external A/D converters.


These high-performance silicon micromachined linear accelerometers and inclinometers consist of a sensor element and an ASIC packaged in a 3x5x0.9 mm Land Grid Array (LGA). The sensor element is fabricated from single-crystal silicon with proprietary Deep Reactive Ion Etching (DRIE) processes, and is protected from the environment by a hermetically-sealed silicon cap at the wafer level.

The sensor element functions on the principle of differential capacitance. Acceleration causes displacement of a silicon structure resulting in a change in capacitance. An ASIC, fabricated using a standard CMOS manufacturing process, detects and transforms changes in capacitance into an analog output voltage, which is proportional to acceleration.

### MARKETS

#### APPLICATIONS

- Personal Navigation Devices*
  - Inertial Navigation and Dead Reckoning
- Cell Phones and Handheld PDAs*
  - Gesture Recognition
- Game Controllers & Computer Peripherals*
  - Inclination and Tilt Sensing
- Ultra-Mobile PCs/Laptops/Hard Disk*
  - Free-fall Detection
- Cameras and Video Equipment*
  - Image Stabilization
- Sports Diagnostic Equipment/Pedometers*
  - Static or Dynamic Acceleration

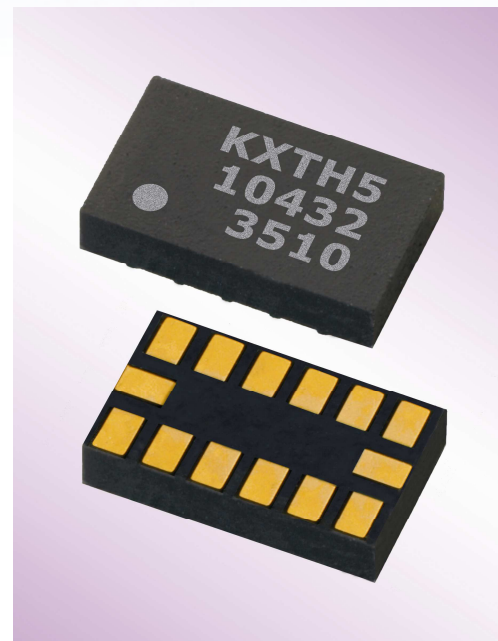

36 Thornwood Dr. - Ithaca, NY 14850 USA tel: 607-257-1080 - fax: 607-257-1146 - [www.kionix.com](http://www.kionix.com) - [info@kionix.com](mailto:info@kionix.com)

"Kionix" is a registered trademark of Kionix, Inc. Products described herein are protected by patents issued or pending. Information provided in this document is believed to be accurate and reliable but is not guaranteed. Kionix does not assume responsibility for its use or distribution. No license is granted by implication or otherwise under any patent or other rights of Kionix. Kionix reserves the right to change product specifications or discontinue this product at any time without prior notice.

© Kionix 2010 All Rights Reserved  
November 3, 2010 Rev. 0  
Page 1 of 2

# KXTH5 Series

## Accelerometers and Inclinometers

### PERFORMANCE SPECIFICATIONS

The performance parameters below are programmed and tested at 2.5 volts. However, the device can be factory programmed to accept supply voltages from 1.8 V to 3.6 V. Performance parameters will change with supply voltage variations.

PERFORMANCE SPECIFICATIONS			
PARAMETERS	UNITS	KXTH5-4325	CONDITION
Range <sup>1</sup>	g	±2.75	Factory programmable
Sensitivity	mV/g	364 typical (382 max)	
0g Offset vs. Temp	mg/°C	±0.6 typical	-40°C to +85°C
Sensitivity vs. Temp	%/°C	±0.01 (xy) typical ±0.04 (z) typical	-40°C to +85°C
Noise	µg / √Hz	150 typical	
Bandwidth <sup>2</sup>	Hz	1000 typical	-3dB
Non-Linearity	% of FS	0.1 typical	% of full scale output
Ratiometric Error	%	0.3 typical	Vdd ± 5%
Cross-axis Sensitivity	%	2.0 typical	
Power Supply	V	2.5	Standard
Current Consumption	µA	350 typical	Operating
	µA	5 typical	Standby
ENVIRONMENTAL SPECIFICATIONS			
PARAMETERS	UNITS	KXTH5-4325	CONDITION
Operating Temperature	°C	-40 to 85	Powered
Storage Temperature	°C	-55 to 150	Un-powered
Mechanical Shock	g	5,000 for 0.5 ms 10,000 for 0.2ms	Powered or un-powered halversine
ESD	V	3,000	Human body model

### NOTES

<sup>1</sup> Custom ranges from 1.5g to 6.0g available.

<sup>2</sup> Internal low pass filter.

### ORDERING GUIDE

Product	Output	Axis(es) of Sensitivity	Range (g)	Sensitivity mV/g	Offset (V)	Operating Voltage (V)	Temperature (°C)	Package
KXTH5-4325	Multiplexed Analog	XYZ	2.75	364 typical	1.25	2.5	-40 to +85	3x5x0.9 LGA