
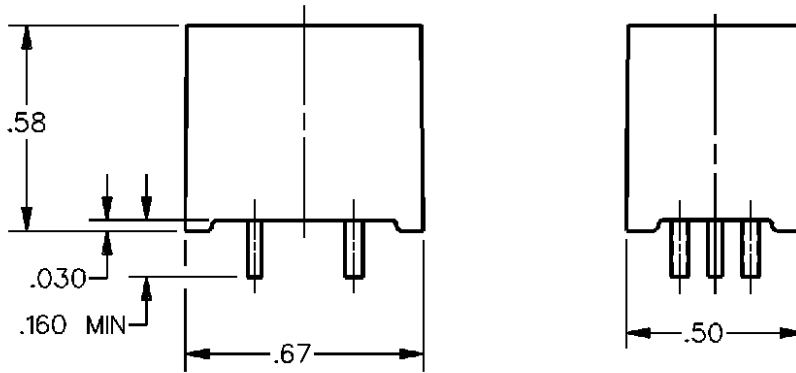
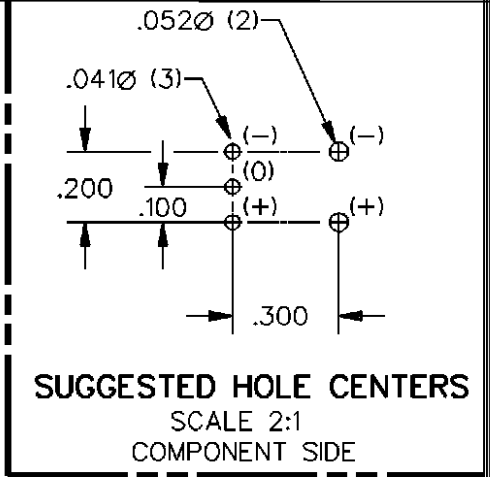


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	
SUPPLY VOLTAGE	4.5 TO 24 VOLTS
SUPPLY CURRENT	22mA MAX, 16mA TYP
TEMPERATURE	-25 TO 85°C
CURRENT: OPERATING	5.0 AMPS ± 5% (@25°C)
RELEASE	3.8 AMPS MIN (@25°C)
MAX CONTINUOUS	20 AMPS
OUTPUT CURRENT	40mA MAX SINK
Vsat	.4 VOLTS MAX
RESISTANCE	5 mΩ
INDUCTANCE	4 μH

NOTE  
1 - ELECTRICAL CONNECTIONS INDICATED ON  
BOTTOM OF DEVICE

THIRD ANGLE PROJECTION	
SCALE <b>2:1</b>	DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE (.0)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.005
ANGLES	±
WEIGHT	



CATALOG LISTING  
**CSDD1EC**  
 PAGE 1 OF 1  
 ISSUE **3**  
 REVISIONS  
 A CO-95704  
 DLM 13 MAR 00  
 CHECK  
 13 MAR 00  
 SAV  
 CHECK  
 13 MAR 00  
 DRAWN  
 DLM 13 MAR 00  
 REPLACES X87332-CS  
 DR-3709-2