

## SHC1022 -- Straight Male Cord Connectors



Machined Aluminum

### Product Specifications


**Product Type**



Accessories

<b>Accessory Item</b>	Straight Male Cord Connectors
<b>NPT Size</b>	1/2" NPT
<b>Cord Crip Cable Range</b>	.25" - .38"
<b>Material</b>	Machined Aluminum
<b>Ingress Protection</b>	IP66
<b>Operating Temperature</b>	-40° F to 300° F (-40° C to 149° C)
<b>Hazardous Locations</b>	Hubbell cord connectors are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 in accordance with the NEC.
<b>Certifications</b>	UL Listed in Accordance with Standard 514B, CSA Certified, United States Coast Guard Approved, Title 46-Part 111
<b>M Drawings</b>	<a href="#">Click here for M-Drawing</a>

<b>Brochures</b>	<a href="#">Click here for product brochure</a>
<b>Catalog Page</b>	<a href="#">Click here for catalog page G74</a>
<b>Catalog Section</b>	<a href="#">Click here for Section-G</a>
<b>UPC Number</b>	78358520022
<b>Weight in LBs</b>	0.05

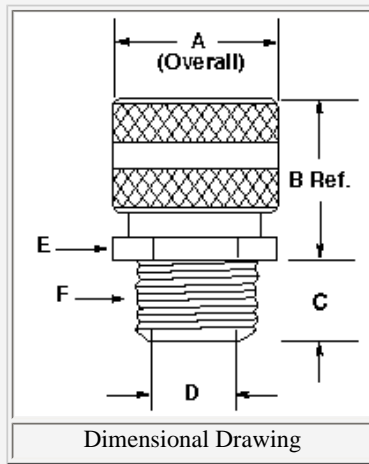

## Cord Connectors

**Straight Male**

Form Size 1-3

Machined  
AluminumMachined  
Zinc-Plated Steel

UL Listed to Type 4, 4X, 12 and Type 13

IP66\*  
SUITABILITY

N.P.T. Hub Size	Cord Dia. Inches (mm)	Form Size	Color Code	Machined Aluminum	Machined Zinc-Plated Steel	Stainless Steel	Nylon Gray	Black
1/4"	.06"-.13" (1.6-3.2)		Green	•	•	•	SHC1001CR	•
	.13"-.19" (3.2-4.7)		Orange	SHC1002	•	•	SHC1002CR	•
	.19"-.25" (4.7-6.3)	F1	Red	SHC1003	•	SHC1003SS	SHC1003CR	•
	.25"-.31" (6.3-7.9)		Black	SHC1004	•	SHC1004SS	SHC1004CR	•
	.31"-.38" (7.9-9.5)		White	SHC1005**	•	•	SHC1005CR	SHC2005CR
	.38"-.44" (9.5-11)		Blue	•	•	•	SHC1006CR	•
3/8"	.06"-.13" (1.6-3.2)		Green	SHC1007	•	•	•	•
	.13"-.19" (3.2-4.7)		Orange	SHC1008	SHC1008ZP	•	SHC1008CR	SHC2008CR
	.19"-.25" (4.7-6.3)	F1	Red	SHC1009	•	SHC1009SS	SHC1009CR	•
	.25"-.31" (6.3-7.9)		Black	SHC1010	SHC1010ZP	•	SHC1010CR	SHC2010CR
	.31"-.38" (7.9-9.5)		White	SHC1011	•	SHC1011SS	SHC1011CR	SHC2011CR
	.38"-.44" (9.5-11.0)		Blue	SHC1012	SHC1012ZP	SHC1012SS	SHC1012CR	SHC2012CR
1/2"	.19"-.25" (4.7-6.3)		Red	SHC1015	•	•	•	•
	.25"-.31" (6.3-7.9)	F1	Black	SHC1016	•	•	•	•
	.31"-.38" (7.9-9.5)		White	SHC1017	•	•	•	•
	.38"-.44" (9.5-11.0)		Blue	SHC1018	•	•	•	•
1/2"	.06"-.13" (1.6-3.2)		Green	SHC1019	•	•	SHC1019CR	•
	.13"-.19" (3.2-4.7)		Orange	SHC1020	SHC1020ZP	SHC1020SS	SHC1020CR	•
	.19"-.25" (4.7-6.3)	F2	Red	SHC1021	SHC1021ZP	SHC1021SS	SHC1021CR	SHC2021CR
	.25"-.38" (6.3-9.7)		White	SHC1022	SHC1022ZP	SHC1022SS	SHC1022CR	SHC2022CR
	.38"-.50" (9.7-12.7)		Blue	SHC1023	SHC1023ZP	SHC1023SS	SHC1023CR	SHC2023CR
	.50"-.62" (12.7-15.9)		Brown	SHC1024	SHC1024ZP	SHC1024SS	SHC1024CR**	SHC2024CR**
1/2"	.38"-.50" (9.7-12.7)		Blue	SHC1025	•	•	•	•
	.50"-.63" (12.7-15.9)		Brown	SHC1026	•	•	•	•
	.63"-.75" (15.9-19.0)	F3	Yellow	SHC1027**	SHC1027ZP**	•	•	•
	.75"-.88" (19.0-22.2)		Orchid	SHC1028**	SHC1028ZP**	•	•	•

Note: See pages T-87 to T-98 for additional technical data and dimensional drawings.

\*IP66 Suitability when used with optional metal clad O-ring shown on page T-83.

\*\*Cable jacket may have to be stripped to pass through connector body.