

Item # 731-0046 10-80VDC, 2.93 inch Dia., 3-hole round, screw termination



10-80VDC, 2.93 inch Dia., 3-hole round, screw termination

These 7 figures, AC hour meters with running indicators, offer crisp, distinctive styling for many panel applications. Available in square and round bezel, flush mount or three-hole round panel mount. Each is light-weight, low power, and carry UL, CSA and CE approvals.

Specifications

Model No.	731
Mounting	Panel (mounting hardware included)- 3-hole Round
Reset	Non-reset
Termination	1/4 inch (6.3mm) spade terminals with removable screws.
Display	7 figures, 0.14 inch high (3.6mm), 99999.99 hours
Display Height	0.14 Inch
Display Height	3.6 mm
No. of Digits	7
Records	99999.99 hours
Input Voltage	10-80 VDC
Power	1.2 watts (maximum)
Operating Temperature	-22 to +158 °F
Operating Temperature	-30 to +70 °C
Weight	2 oz
Weight	57 gm
Panel Cutout	1.81 Sq. Inch 1.99 Dia. Inch
Panel Cutout	46 Sq. mm 50 Dia. mm
Approvals	CE Approved
Stock Availability	Yes
Mounting Holes	Screws provided - 4-40 x 5/8 inch (16 mm); Bolt hole circle - 2.44 inch (62 mm)



Description

These 7 figure, AC or DC hour meters with running indicators, offer crisp, distinctive styling for many panel applications. Available in square and round bezel, flush mount, or three-hole round panel mount. Each is light-weight, low power, and carry UL, CSA and CE approvals.

Features

- 7 figure, 99999.99
- Various voltage inputs
- Distinctive styling

Options

- Terminations
- Din rail
- Voltages


Specifications

Figures:	7 figures, 0.14" high [3.6mm], 99,999.99 hours	Mounting:	Panel (mounting hardware included)
Reset:	Non-reset	Front Panel:	IP65
Voltages:	24, 115, or 230VAC (+/-10%), 50 or 60Hz., 10-80 VDC	Temp. Range:	-22°F to +158°F [-30°C to +70°C]
Power:	3 watts (AC), 1.2 watt maximum (DC)	Approvals:	UL Recognized and CSA Certified (AC only), CE Compliant
Terminations:	1/4" [6.3mm] spade terminals, with removable screws, or 8" [203mm] wire leads	Weight:	1.6 oz. [46g]

Models	Description	Models	Description
711-0150	115VAC/60Hz, 2.28" Dia., Flush mount, screw termination	711-0182	24VAC/60Hz, 1.89" Sq., Flush mount, screw termination
711-0152	230VAC/60Hz, 2.28" Dia., Flush mount, screw termination	711-0190	115VAC/60Hz, 2.05" Sq., Flush mount, screw termination
711-0160	115VAC/60Hz, 2.93" Dia., 3-hole round, screw termination	711-0192	24VAC/60Hz, 2.05" Sq., Flush mount, screw termination
711-0162	230VAC/60Hz, 2.93" Dia., 3-hole round, screw termination	711-0193	115VAC/50Hz, 2.05" Sq., Flush mount, screw termination
711-0163	230VAC/50Hz, 2.93" Dia., 3-hole round, screw termination	711-0195	24VAC/50Hz, 2.05" Sq., Flush mount, screw termination
711-0164	24VAC/60Hz, 2.93" Dia., 3-hole round, screw termination		
711-0171	115VAC/60Hz, 2.93" Dia., 3-hole round, 8" wire leads	731-0046	10-80VDC, 2.93" Dia., 3-hole round, screw termination
711-0180	115VAC/60Hz, 1.89" Sq., Flush mount, screw termination		

* Items in bold are normally in factory stock.

Dimensions

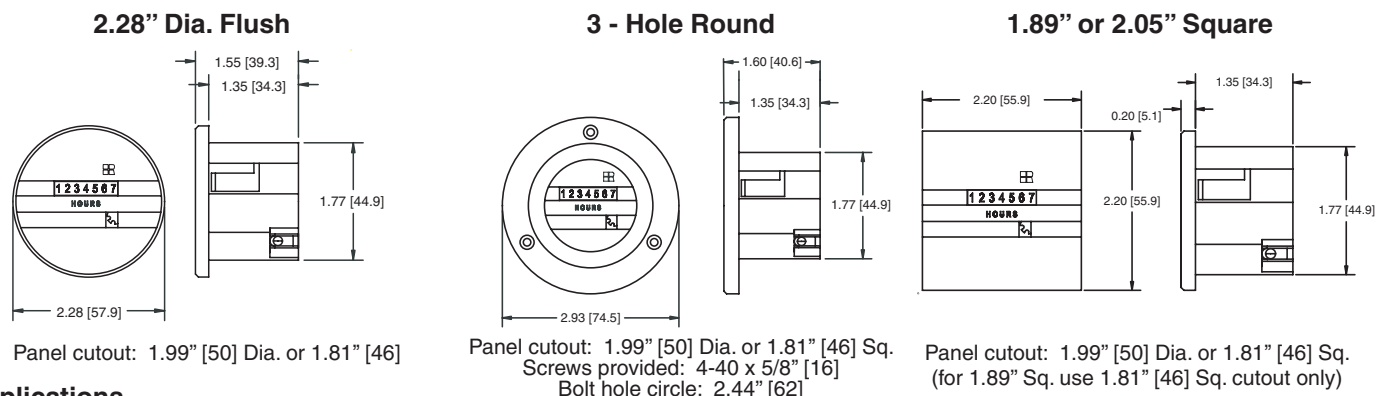

Applications

Medical equipment



Test equipment



Office equipment

