

- Back**
- PushPull Power
 - Flat Cable Connectors SEK
 - *har-mik®*
 - D-Sub
 - InduCom


- **Applications**

Product details

09 04 132 6921

Printed board connector

Type	Type D
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	32 poles
Contact arrangement	Rows a and c
Termination	Angled solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 2 as per IEC 60603-2
Contacts	with contacts
Row pitch	5.08 mm
Board fixing	Without fixing
Coding facility	without coding facility
Current	6 A max.
Clearance/ Creepage	3,0 / 3,0 mm min
RoHS compliant	Yes

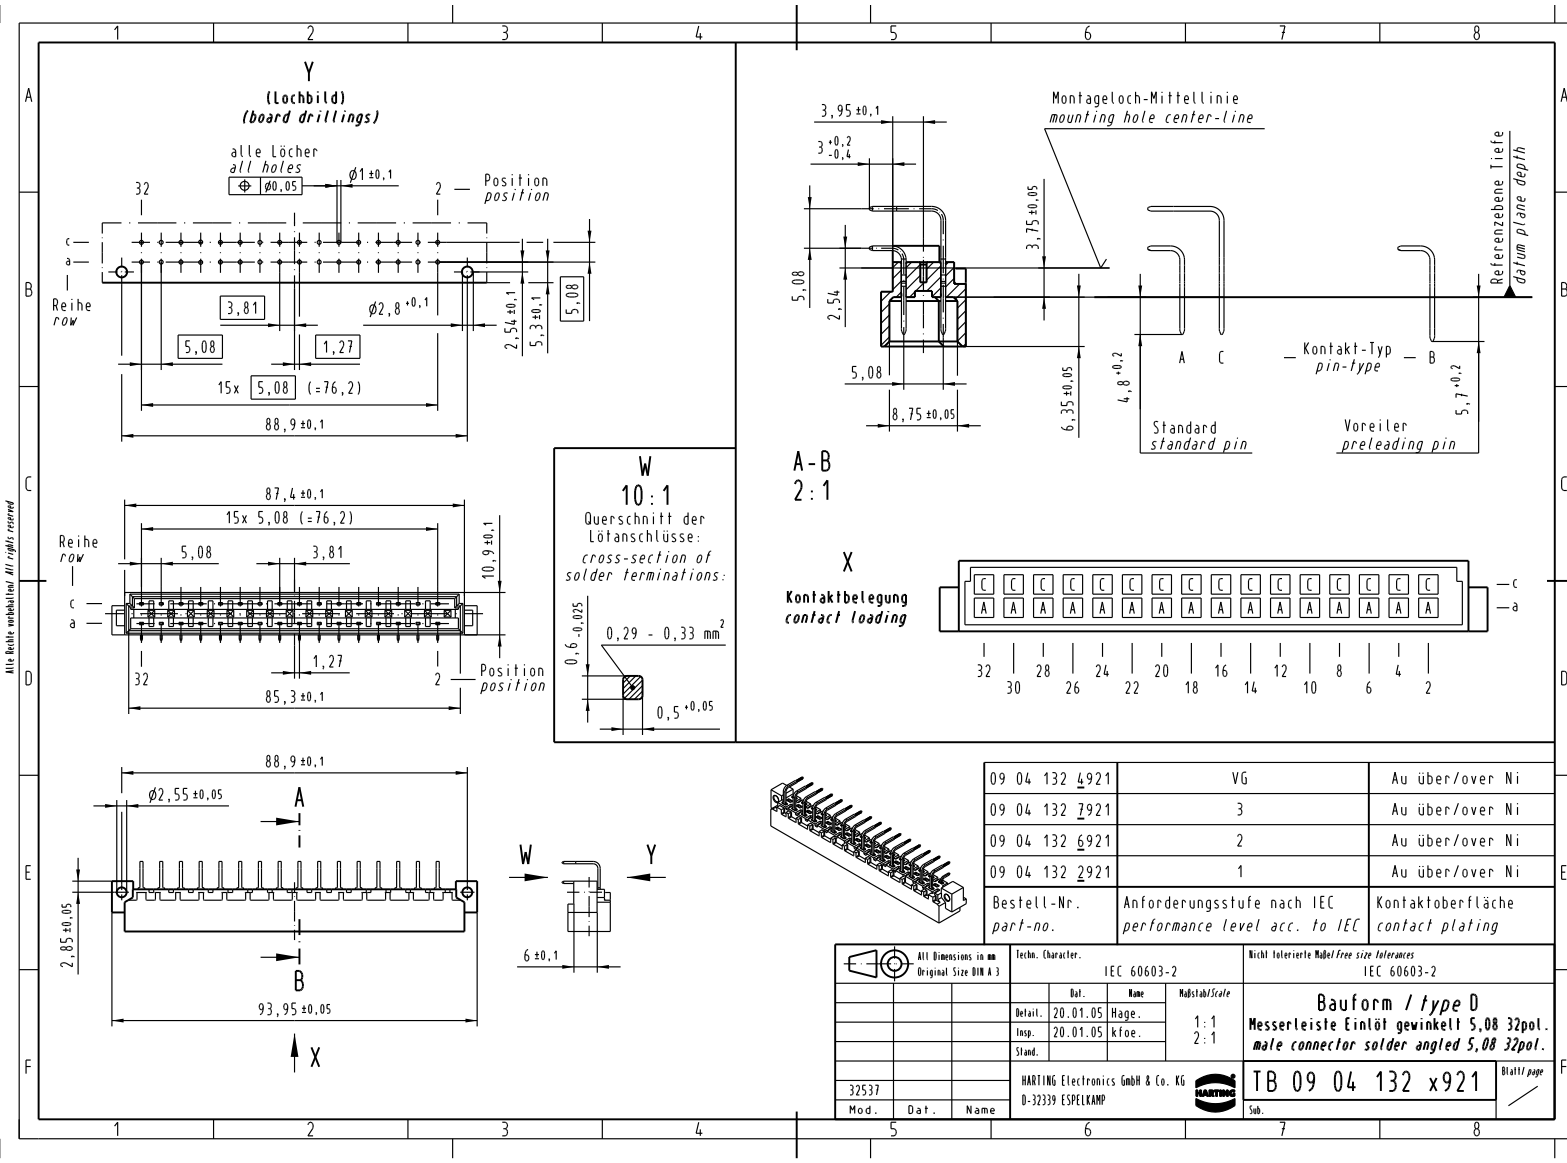

09 04 132 4921	VG	Au über/over Ni
09 04 132 2921	3	Au über/over Ni
09 04 132 6921	2	Au über/over Ni
09 04 132 2921	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

	Techn. Character. IEC 60603-2		Nicht tolerierte Maß/Free size tolerances IEC 60603-2	
	Defail. 20.01.05	Hage. 20.01.05	Maßstab/Scale 1:1	Bauform / type D Messerleiste Einlötl gewinkelt 5,08 32pol. male connector solder angled 5,08 32pol.
Mod. 32537	Dat.	Name	TB 09 04 132 x921	
HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP				Sub. 7