

Model CLS-25

Closed Loop Hall Effect

Description


The CLS-25 is a reduced size current transducer based on the principle of magnetic compensation. It provides electronic measurement of DC, AC or pulsed currents, and their combinations, with galvanic isolation between the primary (high current) and secondary circuits. It has four integral primary pins. This closed loop current sensor provides excellent performance at affordable prices.

Features

- Noncontact measurement of high current
- Measures DC, AC and impulse currents
- Current sensing up to 400A peak
- Very fast response and high accuracy
- High overload capacity
- PC board mount

Applications

- Variable speed drives for motors
- Welding Equipment
- Power supply Equipment
- Measure and control system
- Over current protection
- Protection of power semiconductors

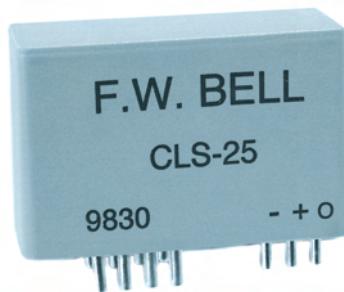

Electrical Specifications

Nominal Current (I_N)	25 A.t RMS
Measuring Range ^[1]	0 to ± 50 A.t (± 62 A.t) ^[2]
Measuring Resistance	R min. R max.
with ± 15 V at ± 25 A.t Max.	54 ohm 360 ohm
at ± 50 A.t Max.	54 ohm 150 ohm
at ± 90 A.t Max.	54 ohm 54 ohm
Nominal Analog Output Current	25 mA
Turns Ratio.....	1-2-3-4/1000
Accuracy at $+25^\circ\text{C}$ ^{[3][4]}	0.5% of I_N Max.
Supply Voltage	± 15 Vdc (+5%)
Galvanic Isolation	5 kV RMS/50 Hz/1 minute
Zero Offset Current at $+ 25^\circ\text{C}$	better than ± 0.15 mA
Thermal Drift of offset Current 0°C to 70°C	better than ± 0.6 mA
Linearity	better than $\pm 0.2\%$
Response Time	less than 1 μs
Bandwidth.....	DC to 200 kHz (-1dB)

CLS-25

General Information

Operating/Storage Temperature	-40°C to $+ 85^\circ\text{C}$ /-40°C to $+ 90^\circ\text{C}$
Current Consumption	10 mA plus output current
Secondary Internal Resistance (at $+ 70^\circ\text{C}$)	66 ohm
Primary Internal Resistance	<1.25 milliohm per turn
Weight	17 g maximum
Package	Insulated plastic case (UL94-VO)
Mounting	Designed to mount directly on PCB via hole connection pins.
Output Reference	To obtain a positive output on the terminal marked "O", current must flow from terminals 1,2,3,4 to terminals 8,7,6, and 5 (conventional flow).

Notes:

[1] = The CLS-25 offers a choice of 4 measuring ranges (refer to the mechanical dimensions on the following page)

[2] = For 2 seconds only

[3] = Excludes the effect of zero offset

[4] = Over the operating range ± 50 A.t.

Current sensors




Current sensors

Mechanical Dimensions


All dimensions are in inches (millimeters)

Model **CLS-25**

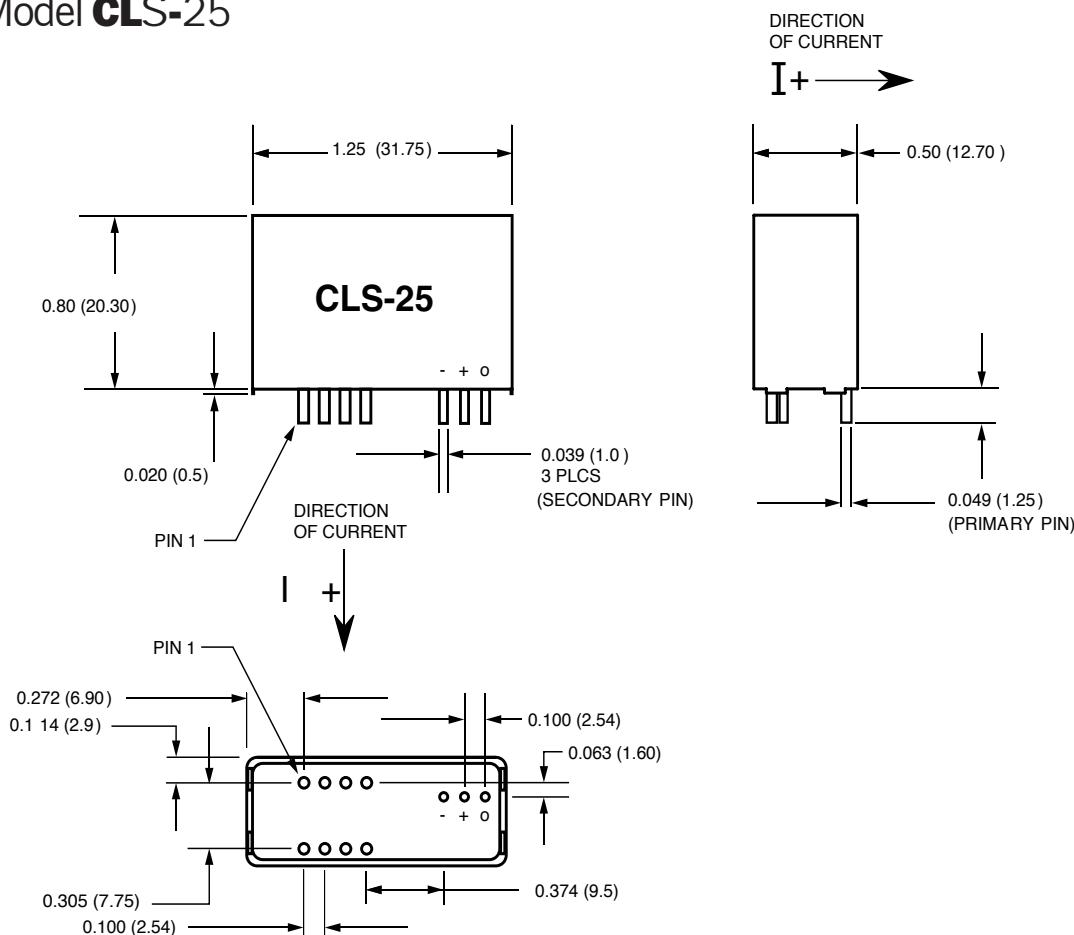

Connection Schematic

Primary Turns	Primary Current NOM. I_N	Primary Current MAX. I_N	Nominal Output Current (mA)	Pin Connections
1	25	44	25	o ⁸ —o ⁷ —o ⁶ —o ⁵ OUT IN o ₁ —o ₂ —o ₃ —o ₄
2	12	22	24	o ⁸ —o ⁷ —o ⁶ —o ⁵ OUT IN o ₁ —o ₂ —o ₃ —o ₄
3	8	14	24	o ⁸ —o ⁷ —o ⁶ —o ⁵ OUT IN o ₁ —o ₂ —o ₃ —o ₄
4	6	11	24	o ⁸ —o ⁷ —o ⁶ —o ⁵ OUT IN o ₁ —o ₂ —o ₃ —o ₄

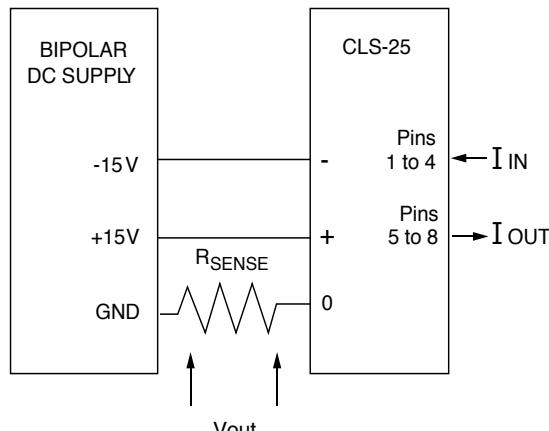

Notes:

1. Mounting Holes - Primary Pins 0.057 (1.45)
2. Mounting Holes - Secondary Pins 0.047 (1.20)

