
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION						
REV.	DESCRIPTION	DATE	APPROVED			
В	RoHS Compliancy	06-01-06	DP			

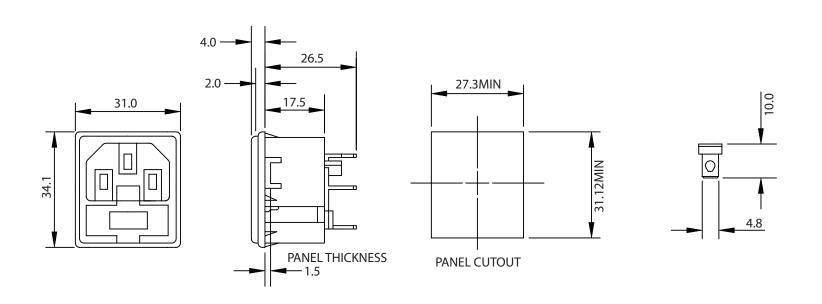

NOTES:

MAX RATING: 10A 250V AC

CONTACT RESISTANCE: <10 m OHM 9<15 OHM INCLUDING FUSEHOLDER

INSULATION RESISTANCE: >10 ³ M OHM A.C. BREAKDOWN: POLE-POLE 5.5kV. POLES-PANEL 4.0kV

OPERATING TEMPERATURE: $-40~^{\circ}\text{C}$ TO 70 $^{\circ}\text{C}$

MAX.PIN TEMPERATURE: +65 °C

MATERIALS: NYLON, FLAMMABILITY RATING UL 94 V-0 CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED

DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE

FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm

RoHS COMPLIANT

CONTROLLED

Dim range	Tolerance +/-	Qualtek Electronics Corp. PPC DIVISION		
(mm)	(mm)	Part Number:	723-15/48	RoHS Compliant
0-1	0.15	Description: SNAP-IN INLET WITH FUSEHOLDER		
1-6	0.20			
6-18	0.30			051/0
18-50	0.50		UNIT: mm	REV. B
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang	08-06-03	JJH / 08-06-03
250-500	1.20	08-06-03		