


# Double Row Terminal Blocks

## 671 RZ Series

### 300 Volts

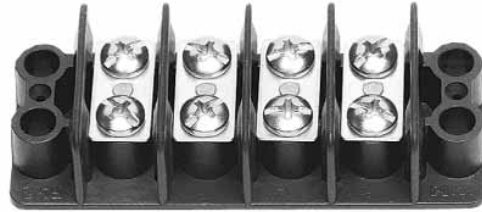

#### Specifications:

- Base, Thermoplastic, 125°C (U.L. RTI)
- Closed Back Design
- Screws, #6-32 Binder Head, Phil-Slot, Steel
- Terminals, Plated Brass
- 1-30 Poles
- 7/16" Centers
- The Suitability Of These Devices For Greater Currents Shall Be Determined In The End-Use Application
- Wire Range With Wire Binding Screw #12-#22 AWG – 20 Amps
- Wire Range With Sems Pressure Screw #12-#22 AWG Stranded Copper Wire Only – 20 Amps
- Will Accommodate Lugs For Wire Sizes #10-#16 AWG – 30 Amps
- UL Recognized File No. XCFR2.E62806
- CSA Certified File No. LR19766
- CE

Catalog #	# of poles	Dimensions	
		A	B
671 RZ 01	1	1.19	0.88
671 RZ 02	2	1.62	1.31
671 RZ 03	3	2.06	1.75
671 RZ 04	4	2.50	2.19
671 RZ 05	5	2.94	2.63
671 RZ 06	6	3.37	3.06
671 RZ 07	7	3.81	3.50
671 RZ 08	8	4.25	3.94
671 RZ 09	9	4.69	4.38
671 RZ 10	10	5.12	4.81
671 RZ 11	11	5.56	5.25
671 RZ 12	12	6.00	5.69
671 RZ 13	13	6.44	6.13
671 RZ 14	14	6.87	6.56
671 RZ 15	15	7.31	7.00

Catalog #	# of poles	Dimensions	
		A	B
671 RZ 16	16	7.75	7.44
671 RZ 17	17	8.19	7.88
671 RZ 18	18	8.62	8.31
671 RZ 19	19	9.06	8.75
671 RZ 20	20	9.50	9.19
671 RZ 21	21	9.94	9.63
671 RZ 22	22	10.37	10.06
671 RZ 23	23	10.81	10.50
671 RZ 24	24	11.25	10.94
671 RZ 25	25	11.69	11.38
671 RZ 26	26	12.12	11.81
671 RZ 27	27	12.56	12.25
671 RZ 28	28	13.00	12.69
671 RZ 29	29	13.44	13.13
671 RZ 30	30	13.87	13.56

Top Mounted Hardware is .250" Wide  
MM = Dim X 25.4

#### Hardware Options: (Hardware options may affect ratings - consult factory)

KT37	=	Full Quick Connect (0° Flat)	See Page 96
KT38	=	Full Quick Connect (45° Bend)	See Page 96
KT39	=	Full Quick Connect (90° Bend)	See Page 96
ST	=	Full Solder	See Page 97
J 601	=	Line to Line Jumper	See Page 99
601 RJ(S)	=	Multiple Position Jumper	See Page 99
3/4 ST	=	Half Solder	See Page 97
KT43	=	Half Quick Connect (0° Flat)	See Page 96
KT44	=	Half Quick Connect (45° Bend)	See Page 96
KT45	=	Half Quick Connect (90° Bend)	See Page 96
3765	=	Sems Pressure Saddle Screw	See Page 99
3767	=	Sems Pressure Saddle Screw with External Tooth Lock Washer	
PSB	=	Phil-Slot Brass Screw	

