

- Back**
- o PushPull Power
 - o Flat Cable Connectors SEK
 - o *har-mik®*
 - o D-Sub
 - o InduCom

● **Applications**

Product details


09 03 196 6922

Printed board connector

Type	Type C
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	96 poles
Contact arrangement	Rows a, b and c
Termination	Straight solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 2 as per IEC 60603-2
Contacts	with contacts
Row pitch	2.54 mm
Current	2 A max.
Clearance/ Creepage	1.2 / 1.2 mm min.
RoHS compliant	Yes

Inquiry

Alle Rechte vorbehalten. All rights reserved.

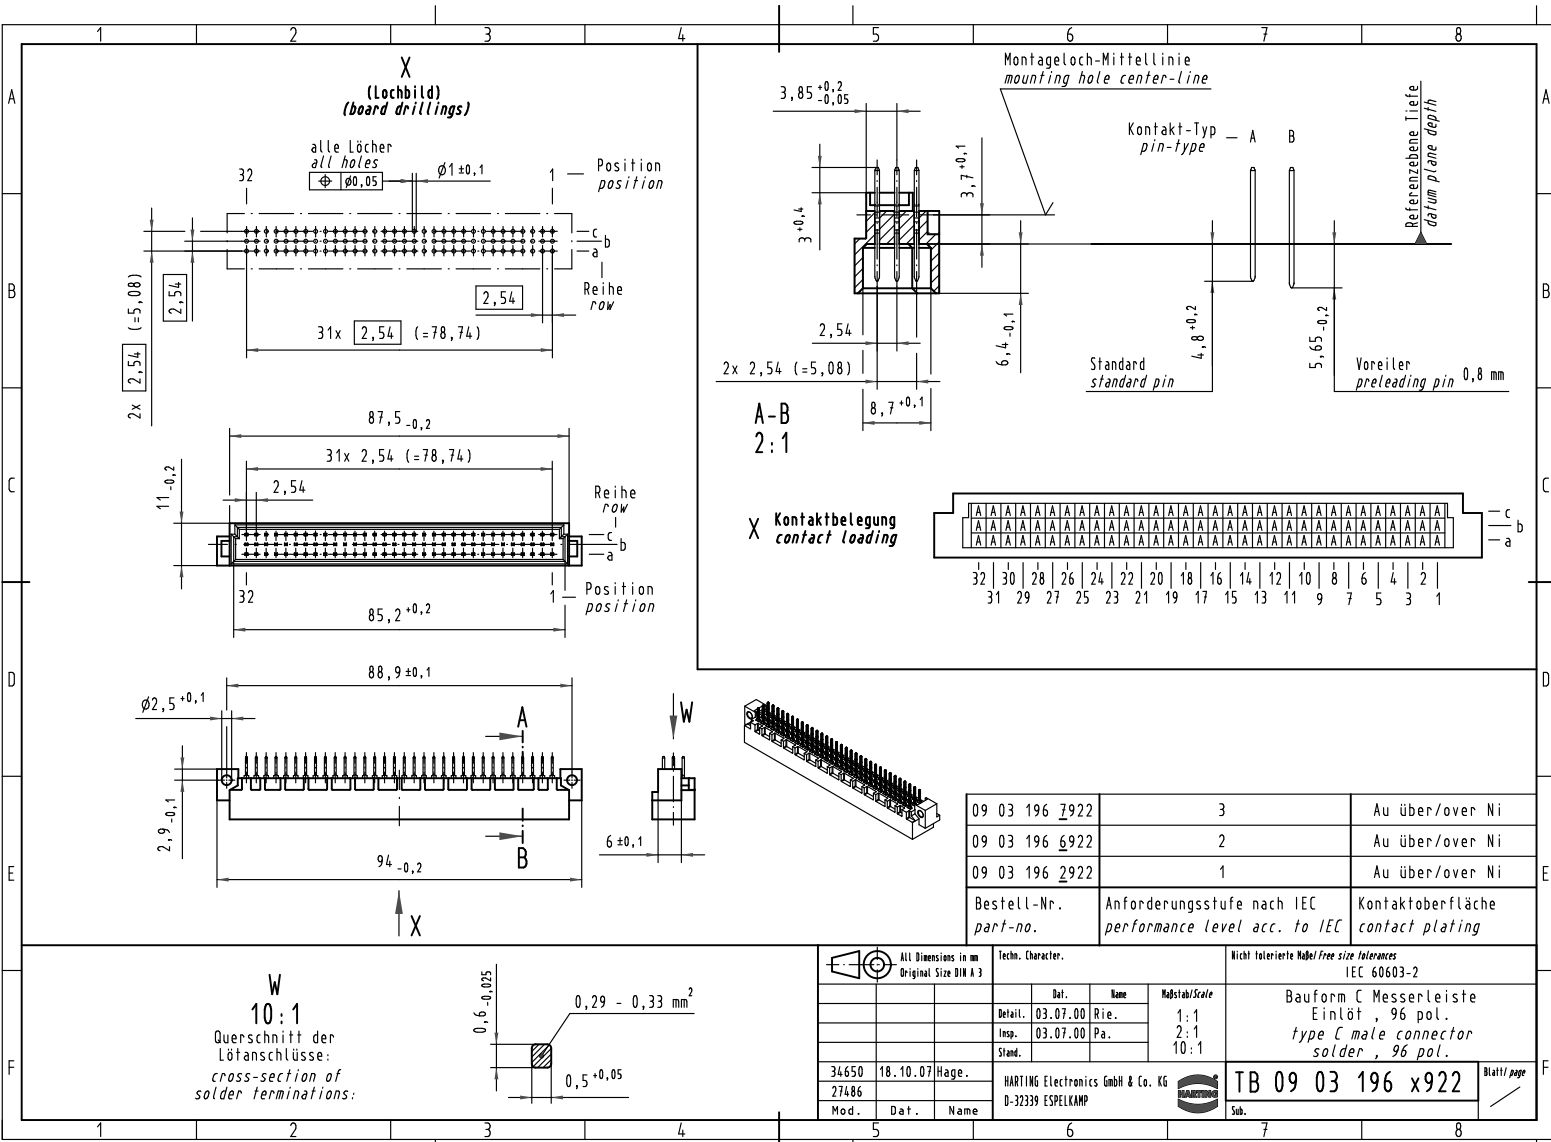

09 03 196 1922	3	Au über/over Ni
09 03 196 6922	2	Au über/over Ni
09 03 196 2922	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

34650 18.10.07 Hage. 27486 Mod. Dat. Name	Techn. Character.			Nicht tolerierte Maß/Free size tolerances IEC 60603-2	
	Dat. Name Maßstab/Scale	Bauform C Messerleiste Einlötl, 96 pol. type C male connector solder, 96 pol.		TB 09 03 196 x922	Blatt/page
	Detail. 03.07.00 Rie. 1:1 Insp. 03.07.00 Pa. 2:1 Stand. 10:1	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP			
	Sub.				