

## product specs: standard lithium cells



### Extended Temperature Series - Cylindrical Cells

Model Data Sheet	Cell Size Ref	Catalog No.	Nominal Voltage (V)	Nominal Capacity (Ah)	Nominal Discharge Current (mA)	Temperature range (°C)	Maximum Dimensions				Available Terminations
							Diameter		Height		
							(mm)	(in)	(mm)	(in)	
<a href="#">TLH-5902</a>	1/2 AA	15-5902-yy505	3.6	0.9	1.0	-55° to +125°	14.5	0.571	25.2	0.992	S P T TP PT PT2
<a href="#">TLH-5955</a>	2/3 AA	15-5955-yy505	3.6	1.4	1.3	-55° to +125°	14.5	0.571	33.5	1.319	S P T TP PT PT2
<a href="#">TLH-5903</a>	AA	15-5903-yy505	3.6	2.0	1.0	-55° to +125°	14.5	0.571	50.5	1.998	S P T TP PT PT2
<a href="#">TLH-5920</a>	C	15-5920-yy505	3.6	7.5	3.0	-55° to +125°	26.2	1.031	50.0	1.970	S T
<a href="#">TLH-5930</a>	D	15-5930-yy505	3.6	17.0	5.0	-55° to +125°	32.9	1.295	61.5	2.421	S T

**NOTES:**

The standard termination codes are listed in the table above. Customized terminations are available upon request.

TERMINATION SUFFIX	/S	/T	/P	/TP	/PT	/PT2
yy	21	31	41	52	53	36

# MODEL TLH-5920


International size reference: C, ER26500

## TECHNICAL DATA

(Typical values @ +25°C for batteries stored for one year or less)




- Nominal capacity @ 3 mA, to 2 V 7.5 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 230 mA
- Maximum pulse current capability 400 mA
- Weight 49.5 g (1.75 oz)
- Volume 26 cc
- Operating temperature range -55 °C to +125 °C
- Li metal content approx. 2.5 g
- U.L. Component Recognition, MH 12193

# TADIRAN LITHIUM BATTERIES

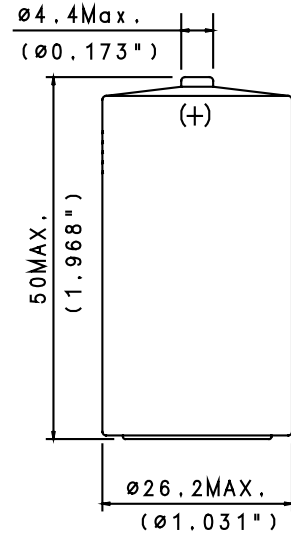

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5920-21505
SUFFIX- /T SOLDER TABS	15-5920-31505
SUFFIX- /P AXIAL PINS	15-5920-41505

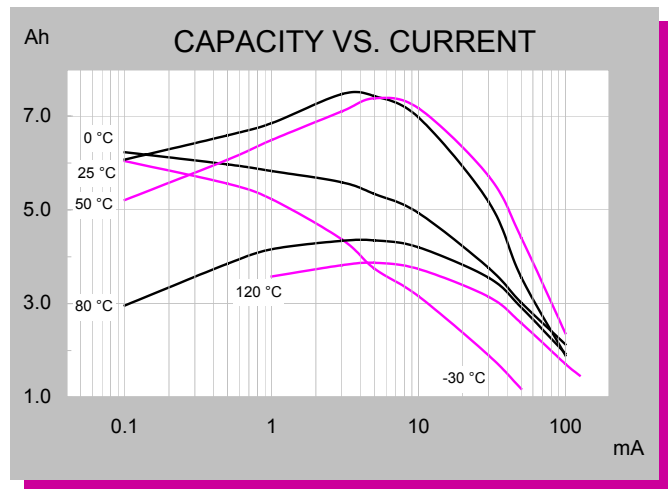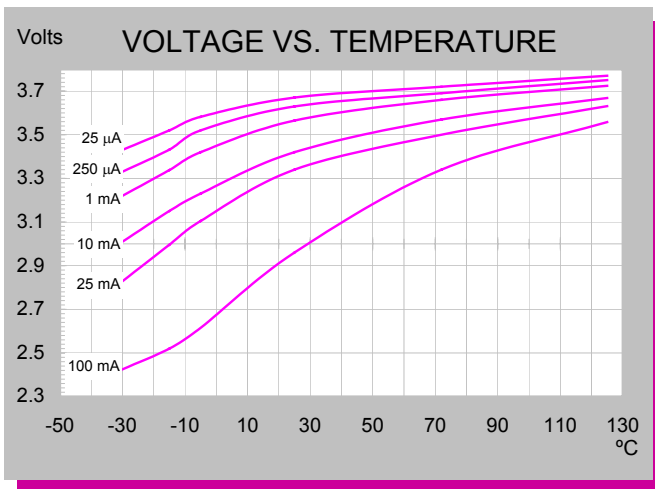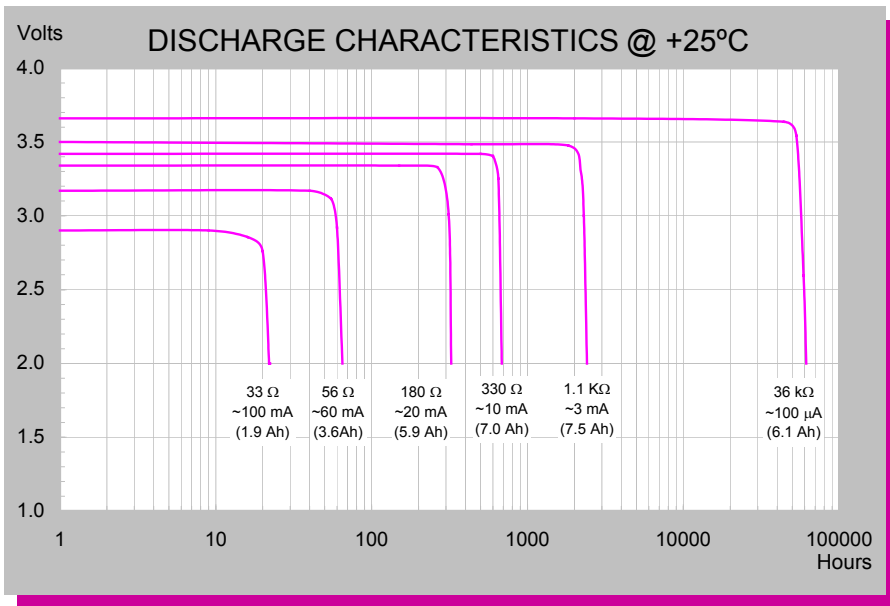

## Extended Temperature Range

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501187