

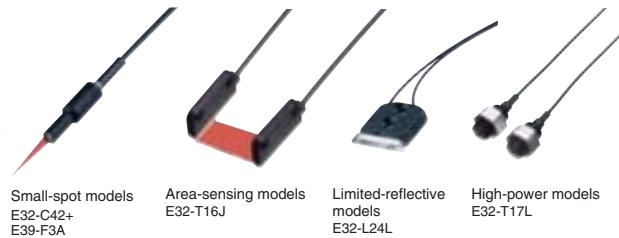
Special-beam Models

Detection with Increased Reliability

▶▶▶ P10

A variety of heads incorporating the latest optical technology makes it possible to solve common problems related to detection and to increase reliability.

- Resistant to dust and dirt
 - Capable of detecting small workpieces
 - Resistant to workpiece vibration
- Use these models to handle unstable detection conditions.




Environment-resistant Models

High Resistance to External Conditions with Fiber

▶▶▶ P14

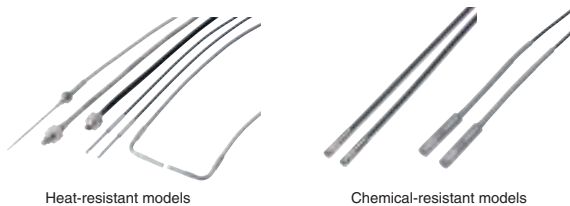We have developed model variations for adapting to a variety of environmental conditions. These models enable detection in high-temperature environments and vacuums.



- High-temperature environments
 - Environments subject to the splattering of chemicals
 - Vacuums
- Use these models to handle applications in special environments.

Application-corresponding Models

Fiber Units for the Food-packaging, Semiconductor, and FPD Industries

▶▶▶ P16














These models, which were developed for specific applications, offer top-quality detection performance.

- Label detection
 - Liquid-level detection
 - Alignment and mapping of glass substrates
 - Wafer mapping
- Use these models for specific applications.



Fiber Units with Reflective Sensors

High-resolution mode
 Standard mode
 High-speed mode
 *When used in combination with the E3X-DA-S Amplifier Unit (general-purpose).
 Super-high-speed mode

Type	Appearance (mm) *3	Sensing distance (mm) *1	(Min. sensing object) (mm) *2	Min. bending radius (mm)	Features	Model number			
Special-beam models	Convergent-reflective	 █ 3.3 █ 3.3 █ 3.3 (3.3)		(0.005 dia.)	R25	Small level differences, high power, side-view	E32-L25		
						Small level differences, top-view	E32-L25A		
			█ 0 to 4 █ 0 to 4 █ 0 to 4 (0 to 4)			R10	Ultracompact, flat-view	E32-L24S	
			█ 2 to 6 (center: 4) █ 2 to 6 (center: 4) █ 2 to 6 (2 to 6) (center: 4)				Heat resistant up to 105°C *4, top-view	E32-L24L	
			█ 5.4 to 9 (center: 7.2) █ 5.4 to 9 (center: 7.2) █ 5.4 to 9 (5.4 to 9) (center: 7.2)				Heat resistant up to 105°C *4, top-view	E32-L25L	
			█ 4 to 10 █ 4 to 10 █ 4 to 10 (4 to 10)			R25	Heat resistant up to 200°C, flat-view	E32-L86	
			█ 0 to 15 █ 0 to 15 █ 0 to 12 (0 to 12)				Wide-range sensing, flat-view	E32-L16	
Environment-resistive models	Heat-resistant	 █ 400 █ 230 █ 160 (72)		(0.005 dia.)	R35	Heat resistant up to 150°C	E32-D51		
			█ 150 █ 90 █ 60 (27)				R10	Heat resistant up to 200°C	E32-D81R-S E32-D81R
			█ 100 █ 60 █ 40 (18)			R25	Heat resistant up to 350°C	E32-D61-S E32-D61	
		 Min. bending radius of sleeve: 10	█ 100 █ 60 █ 40 (18)				Heat resistant up to 400°C, with sleeve	E32-D73-S E32-D73	
	Chemical-resistant		█ 160 █ 95 █ 65 (30)			(0.005 dia.)	R40	Fluororesin cover, long distance	E32-D12F
			█ 70 █ 40 █ 30 (10)					Fluororesin cover, side-view	E32-D14F

*1. The sensing distances are for white paper.
 *2. The values for the minimum sensing object are representative values that indicate values obtained in standard mode with the sensing distance and sensitivity set to optimum values.
 *3. Free-cut Indicates models that allow free cutting.
 *4. For continuous operation, use the products within a temperature range of -40°C to 90°C.
 *5. For continuous operation, use the products within a temperature range of -40°C to 130°C.
 *6. The maximum temperature that can be withstood varies with the location

Fiber Units

Item	Type	Environment-resistive models				
		Heat-resistant				
		E32-T5□ E32-D5□	E32-T8□R-S E32-D8□R-S	E32-T84S-S	E32-T6□-S E32-D6□-S	E32-D73-S
Ambient operating temperature range *1		-40°C to 150°C *4	-40°C to 200°C *3		-60°C to 350°C *3	-40°C to 400°C *3
Ambient humidity range *1		35% to 85%				
Fiber material		Plastic (fluororesin coating)	Glass (fluororesin coating)	Glass (SUS spiral coating)		
Degree of protection		IEC standard: IP67				

Item	Type	Environment-resistive models				
		Chemical-resistant			Vacuum-resistant	
		All other models	E32-T51F	E32-T81F-S	All other models	32-T84SV
Ambient operating temperature range *1		-40°C to 70°C	-40°C to 150°C *4	-40°C to 200°C *3	-25°C to 120°C	-25°C to 200°C
Ambient humidity range *1		35% to 85%				
Fiber material		Plastic (fluororesin coating)		Glass (fluororesin coating)	Glass (fluororesin coating)	Glass (SUS spiral coating)
Degree of protection		IEC standard: IP67			---	

Item	Type	Application-corresponding models				
		Label-detection	Liquid-level detection			Wafer-mapping
			All other models	E32-A01 E32-A02	E32-D82F	
Ambient operating temperature range *1		-40°C to 70°C			-40°C to 200°C *3	-40°C to 70°C
Ambient humidity range *1		35% to 85%				
Fiber material		Plastic (polyethylene coating)		Plastic (fluororesin coating)	(Fluororesin coating)	Plastic (polyethylene coating)
Degree of protection		IEC standard: IP67	IEC standard: IP50		IEC standard: IP68	IEC standard: IP50
Other			Repeat accuracy: 1 mm max.		Repeat accuracy: 0.5 mm max.	

Item	Type	Application-corresponding models				
		Glass-substrate-alignment		Glass-substrate-mapping		
		All other models	E32-L66	E32-A09	E32-A09H	E32-A09H2
Ambient operating temperature range *1		-40°C to 70°C	0°C to 300°C *3, *5	-40°C to 70°C	-40°C to 150°C *4	-40°C to 300°C *3
Ambient humidity range *1		35% to 85%				
Fiber material		Plastic (polyethylene coating)	Glass (SUS spiral coating)	Plastic (polyethylene coating)	Plastic (fluororesin coating)	Glass (SUS spiral coating)
Degree of protection		IEC standard: IP40				

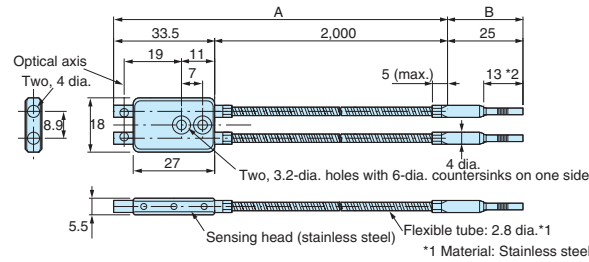
*1. There must be no icing or condensation within the range specified for the ambient operating temperature.
 *2. For continuous operation, use the products within a temperature range of -40°C to 90°C.
 *3. The maximum temperature that can be withstood varies with the location. Refer to dimensions diagrams for details.
 *4. For continuous operation, use the products within a temperature range of -40°C to 130°C.
 *5. These values are based on the assumption that there are no repeated sudden changes in temperature.

Fiber Units with Reflective Sensors

Convergent-reflective Models

Free-cut Indicates models that allow free cutting.


E32-L86



Note: The maximum allowable temperatures for sections A and B are 200°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by *2), however, must stay within the Amplifier Unit's operating temperature range.

Heat-resistant Models

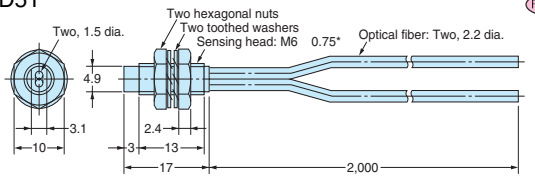E32-D51




Note: The maximum allowable temperature is 150°C. The maximum allowable temperature for continuous operation is 130°C.

E32-D81R-S
E32-D81R

Using the E32-D81R-S

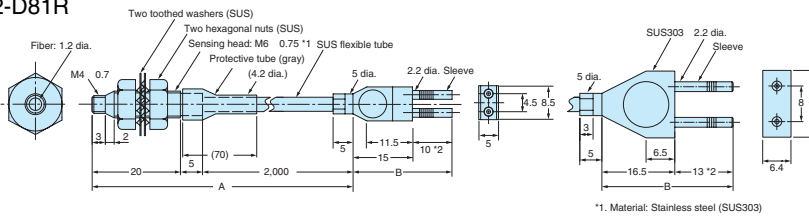Using the E32-D81R




Note 1. The maximum allowable temperatures for sections A and B are 200°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by *2), however, must stay within the Amplifier Unit's operating temperature range.

E32-D61-S
E32-D61

Using the E32-D61-S

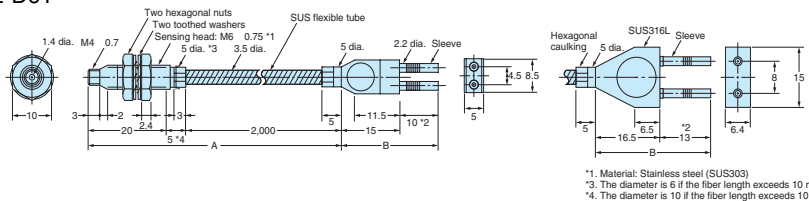Using the E32-D61




Note 1. The maximum allowable temperatures for sections A and B are 350°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by *2), however, must stay within the Amplifier Unit's operating temperature range.

E32-D73-S
E32-D73

Using the E32-D73-S

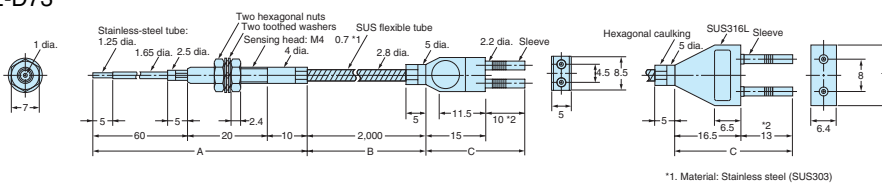
Using the E32-D73



Note 1. The maximum allowable temperatures for sections A, B, and C are 400°C, 300°C, and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by *2), however, must stay within the Amplifier Unit's operating temperature range.

Chemical-resistant Models

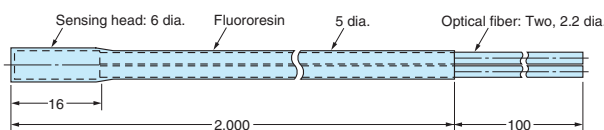E32-D12F



E32-D14F

