



Panel Mount Indicator, Non-Relampable LED Technology Mounting Hole, Ø 0.380"



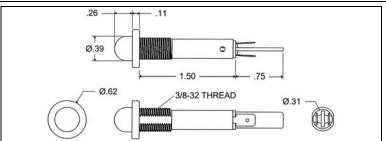



Recommended panel thickness: 0.030" to 0.250"

.187 x .020 terminals are standard

 $\begin{array}{lll} \text{Storage temperature} & T_{\text{STG}} & : \text{-}25^{\circ}\text{C} \text{ -} +80^{\circ}\text{C} \\ \text{Ambient temperature} & T_{\text{A}} & : \text{-}20^{\circ}\text{C} \text{ -} +60^{\circ}\text{C} \\ \text{Voltage tolerance} & V_{\text{OP}} & : \pm 10\% \\ \end{array}$

| Part No. | Lens Color | Voltage | Current mA | Rated Life |
|----------------|---------------|---------|---------------|-------------|
| LED 12V Series | | | | |
| WL-6091QM1-12V | Red | 12V-14V | 20mA | 100,000 Hrs |
| WL-6091QM5-12V | Green | 12V-14V | 20mA | 100,000 Hrs |
| WL-6091QM7-12V | Yellow | 12V-14V | 20mA | 100,000 Hrs |
| LED 24V Series | | | | |
| WL-6091QM1-24V | Red | 24V-28V | 20mA | 100,000 Hrs |
| WL-6091QM5-24V | Green | 24V-28V | 20mA | 100,000 Hrs |
| WL-6091QM7-24V | Yellow | 24V-28V | 20mA | 100,000 Hrs |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Body Material: Nylon, white Lens Material: Polycarbonate Bezel Material: Stainless steel

Terminals: Quick-connect, tinned brass

Gaskets: Buna-N

Certifications: Most Wamco indicators carry Agency approvals.

Please contact Wamco for the latest Agency information regarding the specific product series and voltage

required.

Options: Additional options and lens styles available.

Please contact Wamco for more information.

| Drawn | SC | 03/01/10 | |
|----------|----|----------|---|
| Checked | EB | 03/01/10 | 1 |
| Approved | EB | 03/02/10 | |

Panel Mount Indicators

LED

Datasheet: WL-6091QMX-XXX Series

Rev: 2